




MODULAR BLOCK FAMILY CATALOG

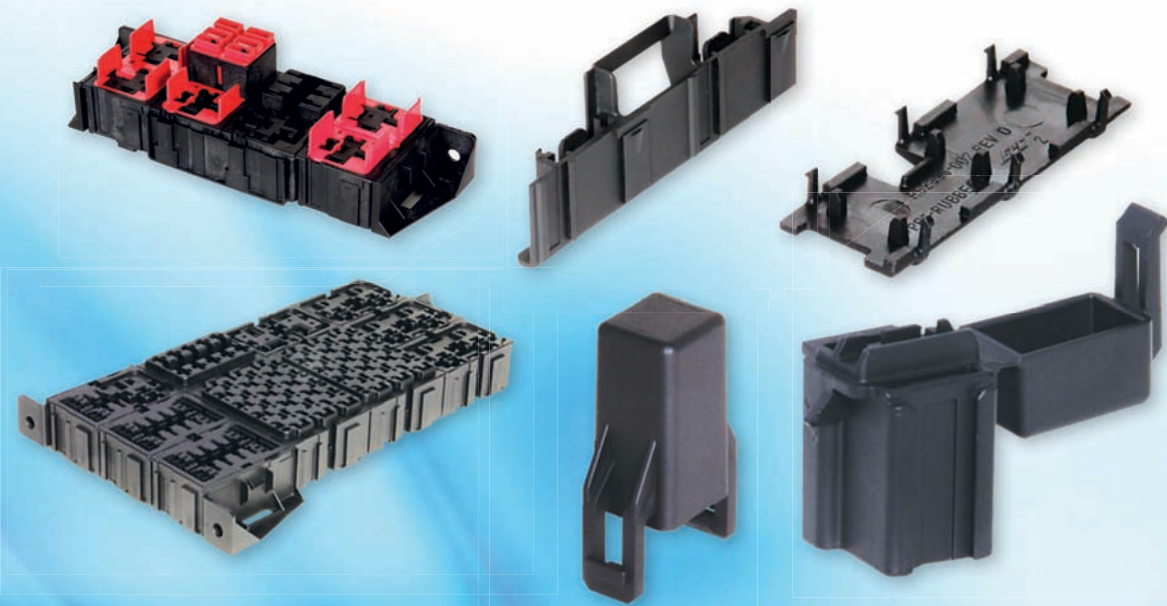

PKC Group

PKC Group is a global leader in the design, development, and production of high-quality, cost-effective wiring systems, components, and electronics for the commercial vehicle, automotive, agricultural, construction, recreational, energy, and industrial electronics industries.

Wiring Systems:

From a single wire harness to an entire Electrical Distribution System (EDS), PKC delivers power where and when you need it.

System integrity is consistently achieved through architecture optimization, proven change control processes, and the vertical integration of key PKC brand components into the EDS design, including:

- **Power Distribution Centers**
- **Connector Systems**
- **Terminal Systems**
- **Routing and Retention Aids**
- **Wire and Cable**

Specializing in the design and customization of unique products with demanding requirements, PKC is capable of providing a wide range of EDS support, from full service supplier to build to print provider.

Electronics:

PKC Electronics provides complete support, from design and development to production, of customized electronics.

Through operational excellence, PKC consistently reduces customer costs while extending product life cycles. With strategically placed facilities around the globe, PKC offers a wide range of customizable products and services, including:

- **Smart Power Distribution Centers**
- **Electronic Control Units**
- **DC to DC Converters**
- **Battery Management**
- **Custom Testing Aids for Electronic Devices**
- **Contract Manufacturing**

Together, PKC Wiring Systems and Electronics divisions offer a fully integrated Electrical and Electronics Distribution System (EDS) provider to our customers.

Modular Block Series

The PKC Modular Block family is comprised of individual fuse and relay modules that can be assembled into an infinite selection of customized configurations to meet the packaging and power distribution requirements of our customers.

Offering the flexibility of a customized product with minimal investment, the Modular Block family includes over 200 off the shelf components in the following categories:

- Fuse and Relay Modules
- Spacers
- Brackets
- Top and Bottom Covers

There are many advantages to the PKC Modular Block family, including:

- The ability to satisfy an infinite number of customer requirements with maximum efficiency and minimum customer investment due to off the shelf availability
- Condensed cycle designs and configuration flexibility which allow for the optimization of system architecture
- Mounting brackets designed specific to each application and developed to meet almost any packaging requirements
- An outstanding accommodation of content: mini-fuses, J-case fuses, maxi-fuses, full ISO relays, half ISO relays, 280 series relays, diodes, maxi-fuses, and circuit breakers
- The use of Class 3 temperature (-40°C/+135°C) resin material to manufacture all Modular Block family components, validating them for use on automotive, commercial vehicle, agriculture, construction, and recreational vehicle applications
- Top and bottom covers, including environmental enclosures, designed to satisfy any packaging and serviceability requirements.

Environmental Enclosures:

Customized environmental enclosures are available and accommodate numerous combinations of the PKC Modular Block family while providing fortification against harsh environments and conditions.

In addition to environmental protection, these rugged enclosures offer numerous benefits, including:


- Power bussing to minimize the number of routed wires to the PDC
- Removable and hinged top cover options
- Multiple side and bottom wire exit options
- Ease of serviceability



CATALOG INDEX

Modules	5
Spacers	18
Brackets	28
Top Covers	46
Bottom Covers	58
Modular Assemblies	66
Terminal Selection Guide	77

MODULES SECTION

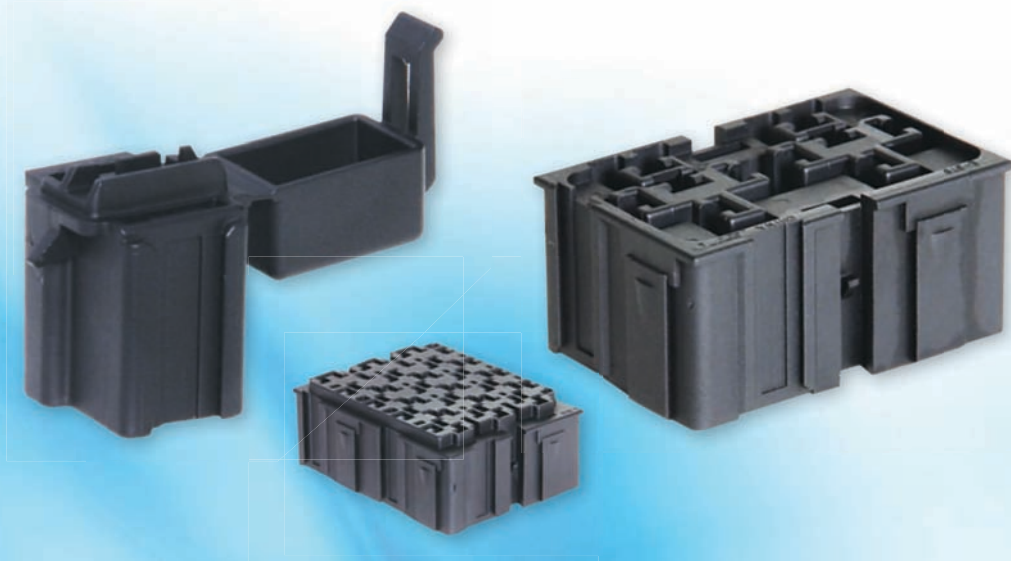


Part Number: E-0379 - ISO Relay Module

SERVICEABLE CONTENT	QUANTITY
Full ISO Relay	2



Required Spacer

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-0386	ISO Relay Spacer	19
E-0779	ISO Relay and Flasher Spacer	20

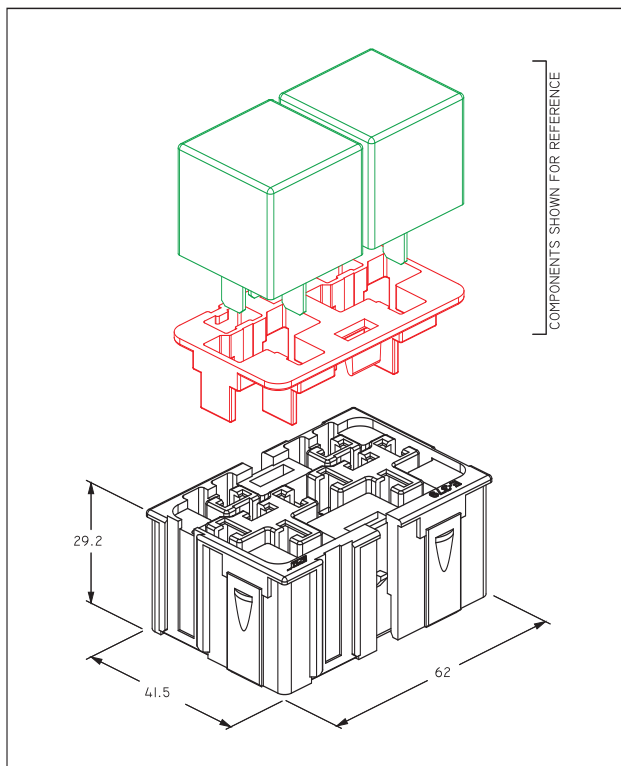


Part Number: E-0380 - Micro (1/2 ISO) Relay Module

SERVICEABLE CONTENT	QUANTITY
Micro (1/2 ISO) Relay	4




Required Spacer

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-0387	Micro (1/2 ISO) Relay Spacer	19

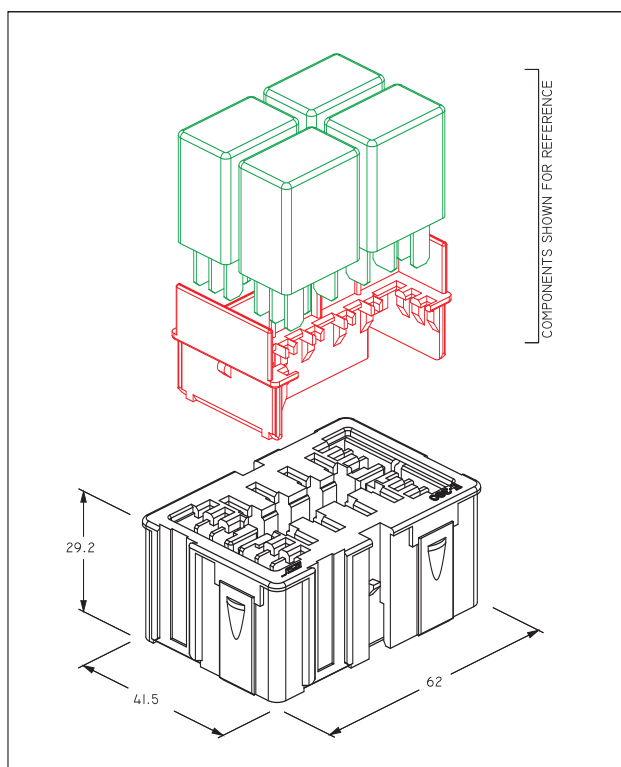


Part Number: E-0431 - Maxifuse Module

SERVICEABLE CONTENT	QUANTITY
Maxi Fuse	5

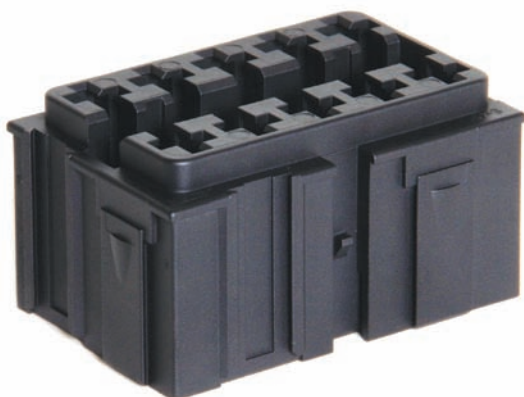

Required Spacer

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-1579	Maxifuse Spacer	22

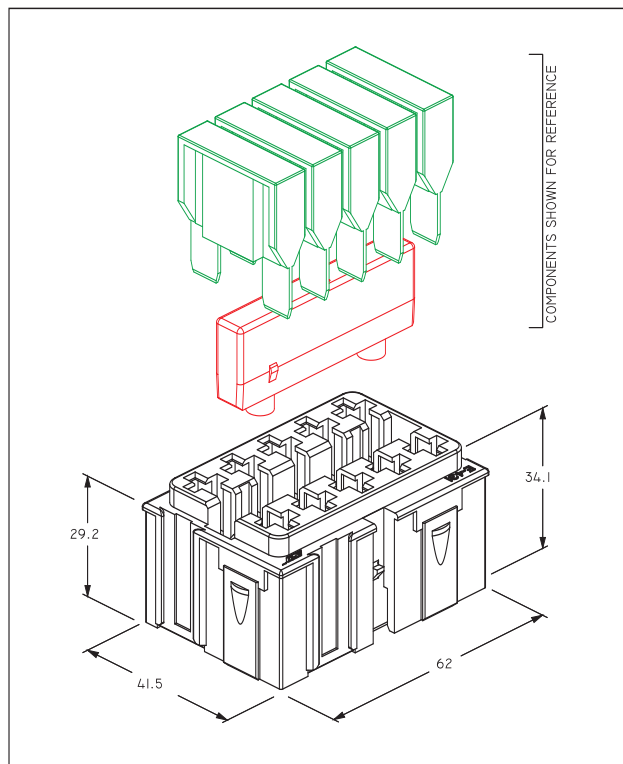


Part Number: E-0433 - Minifuse Module

SERVICEABLE CONTENT	QUANTITY
Mini Fuse	12



Required Spacer

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-0439	Minifuse Spacer	19

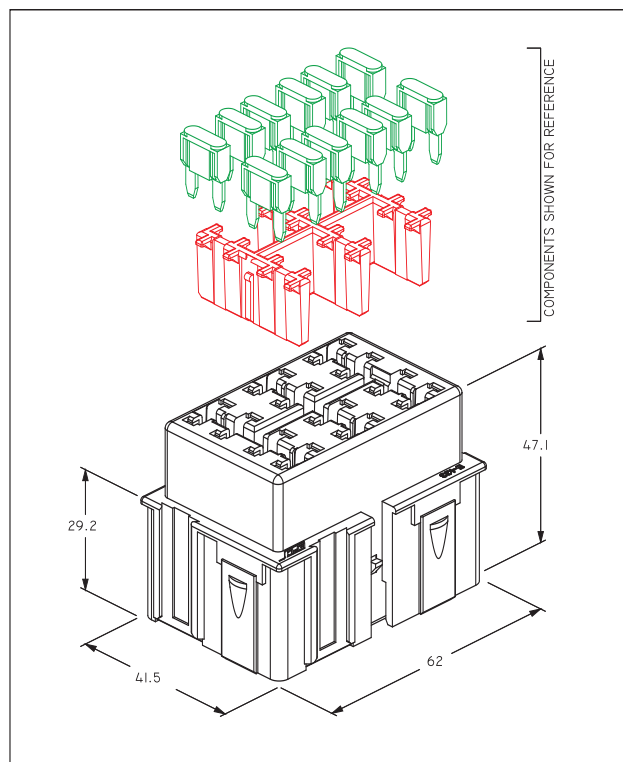


Part Number: E-0777 - ISO and Micro (1/2 ISO) Relay Module

SERVICEABLE CONTENT	QUANTITY
Full ISO Relay	1
Micro (1/2 ISO) Relay	2




Required Spacer

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-0791	ISO and Micro (1/2 ISO) Relay Spacer	20
E-2152	Electronic Flasher and Micro (1/2 ISO) Relay Spacer	23

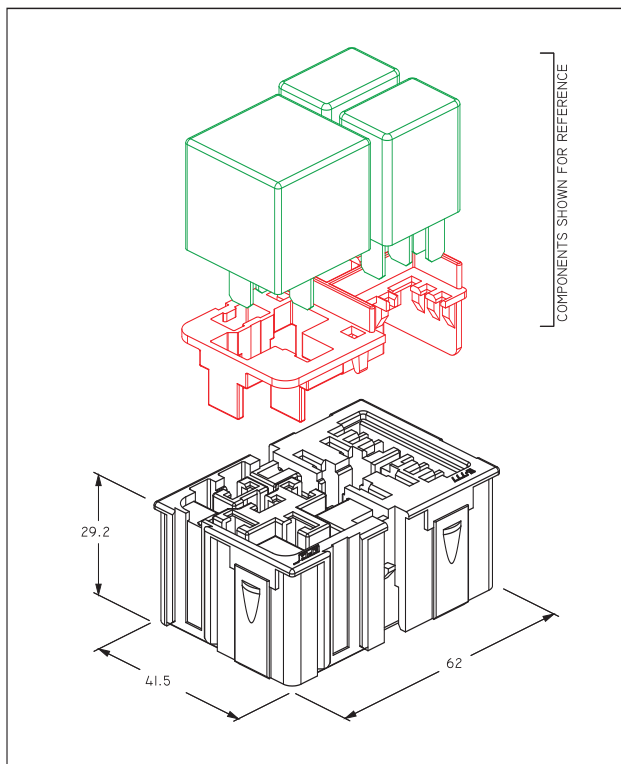


Part Number: E-0946 - ISO Relay and Diode Module

SERVICEABLE CONTENT	QUANTITY
Full ISO Relay	1
Diode	3

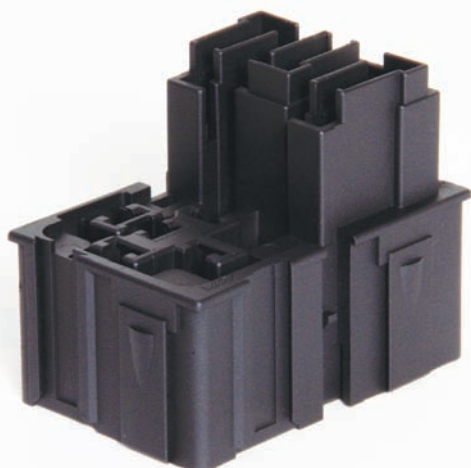

Required Spacer

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-1003	ISO Relay and Diode Spacer	20

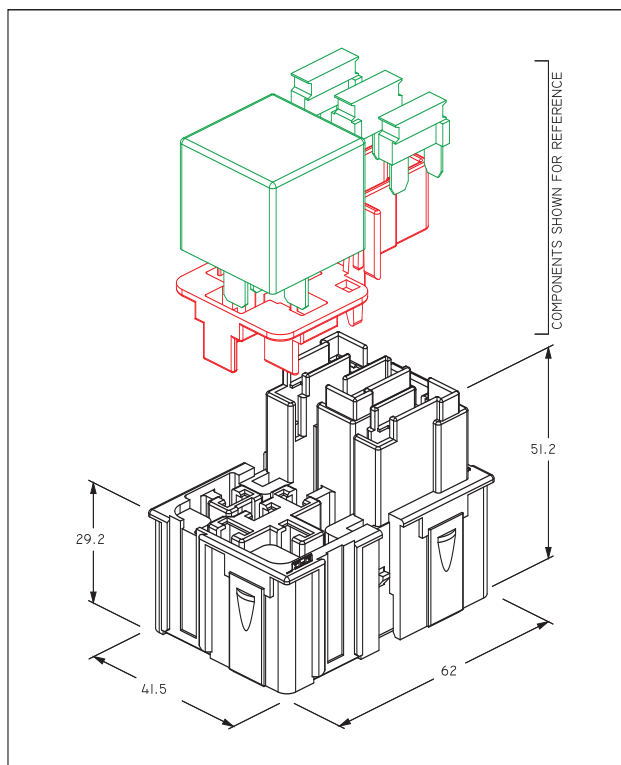


Part Number: E-1012 - Minifuse Half Module

SERVICEABLE CONTENT	QUANTITY
Mini Fuse	6




Required Spacer

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-1090	Half Module Minifuse Spacer	21

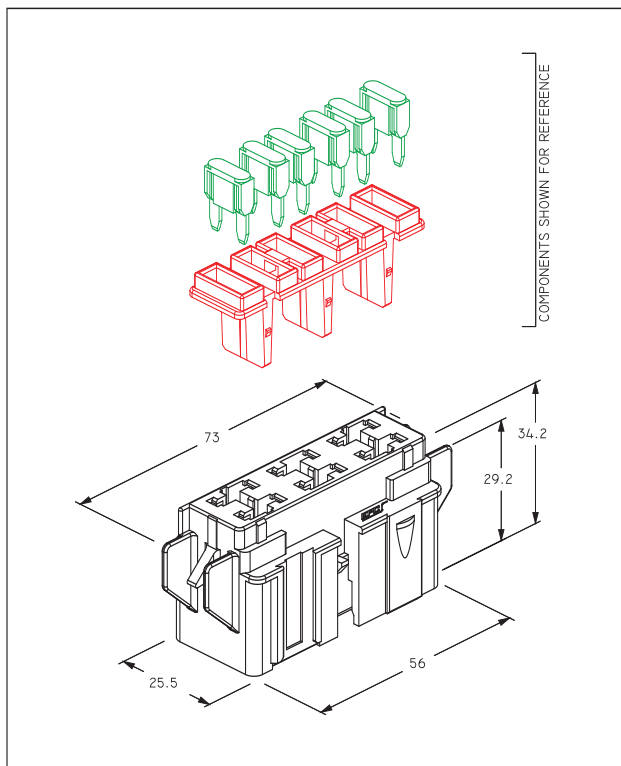


Part Number: E-1324 - High Current and ISO Relay Module

SERVICEABLE CONTENT	QUANTITY
High Current Relay	1
Full ISO Relay	1

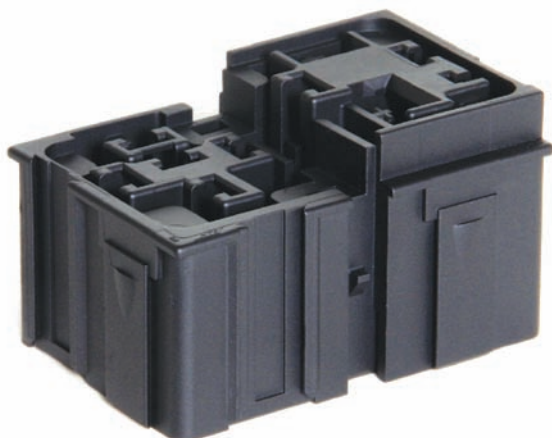


Required Spacer

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-1325	High Current and ISO Relay Spacer	21
E-5012	High Current and ISO Relay Spacer	24

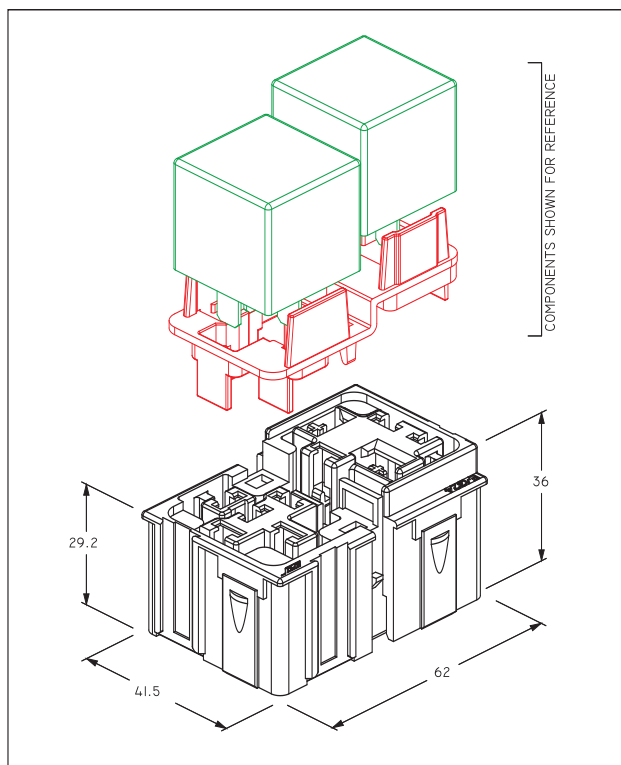


Part Number: E-1546 - 27 Minifuse Double Module

SERVICEABLE CONTENT	QUANTITY
Mini Fuse	27

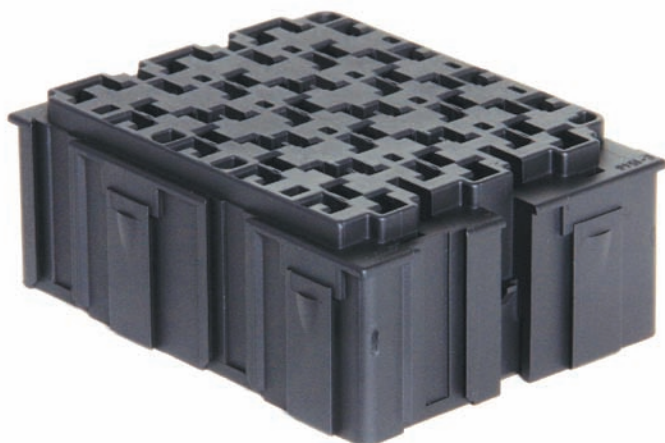

Required Spacer

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-1594	27 Minifuse Double Module Spacer	23

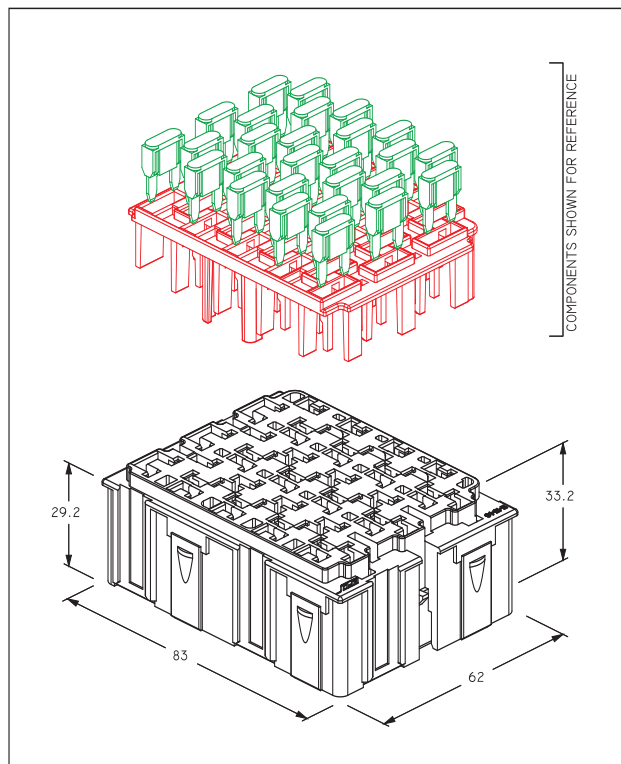


Part Number: E-1582 - ISO Relay and Minifuse Module

SERVICEABLE CONTENT	QUANTITY
Full ISO Relay	1
Mini Fuse	6



Required Spacer

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-1583	ISO Relay Half Module Spacer	22
E-1865	Minifuse Half Module Spacer	23

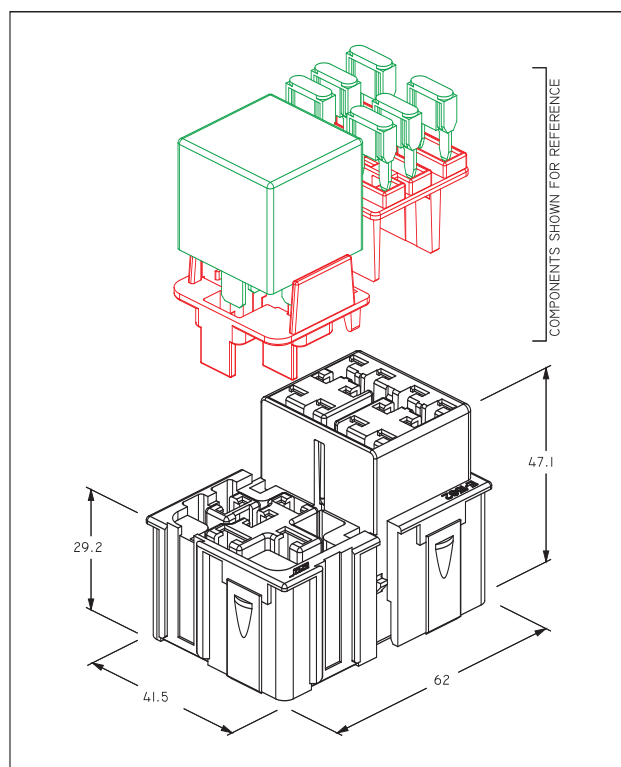


Part Number: E-1588 - Micro (1/2 ISO) Relay Half Module

SERVICEABLE CONTENT	QUANTITY
Micro (1/2 ISO) Relay	2




Required Spacer

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-1589	Micro (1/2 ISO) Half Module Spacer	22

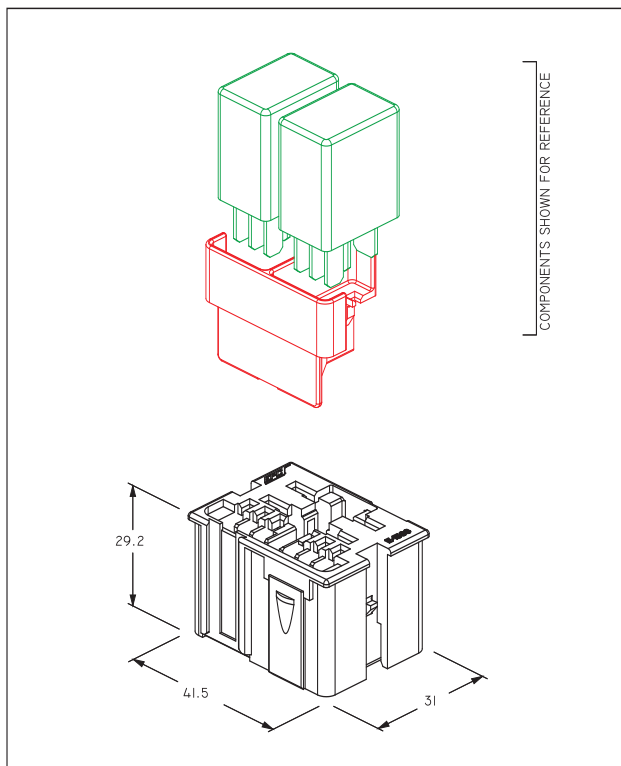


Part Number: E-4321 - Single J-Case Module

SERVICEABLE CONTENT	QUANTITY
J-Case Fuse	1

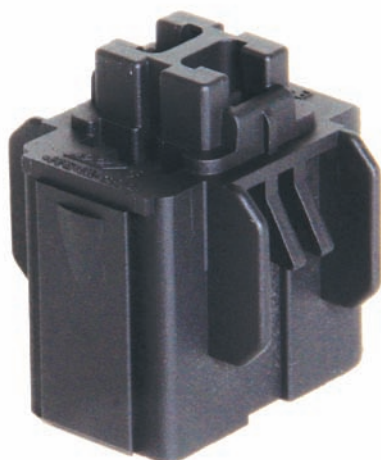

Required Spacer

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-4322	Single J-Case Spacer	24

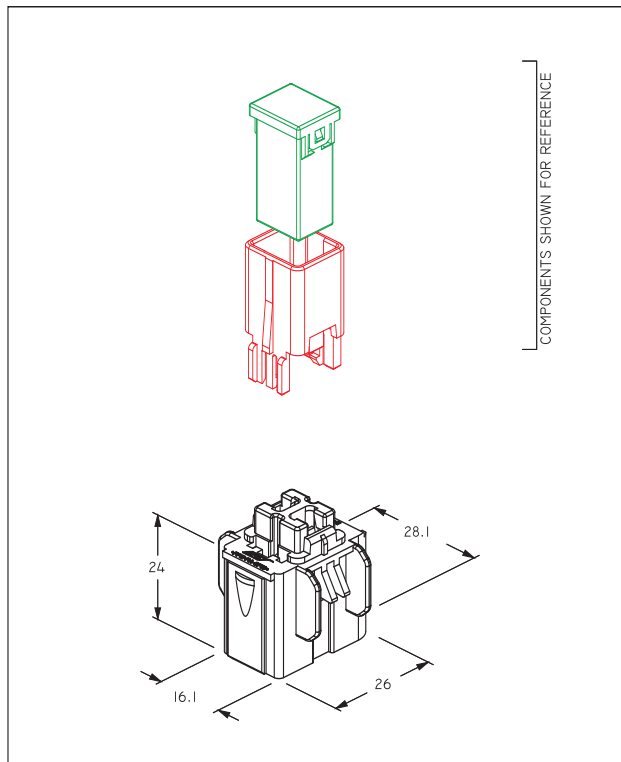


Part Number: E-5529 - High Current Relay Module

SERVICEABLE CONTENT	QUANTITY
High Current Relay	2




Required Spacer

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-5528	High Current Relay Spacer	24

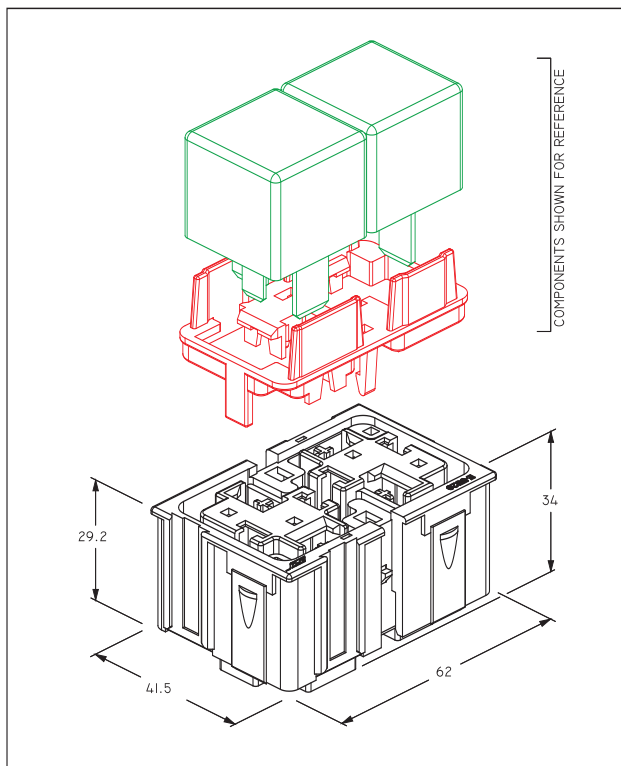


Part Number: E-5954 - ISO Relay and Maxifuse Module

SERVICEABLE CONTENT	QUANTITY
Maxi Fuse	3
Full ISO Relay	1

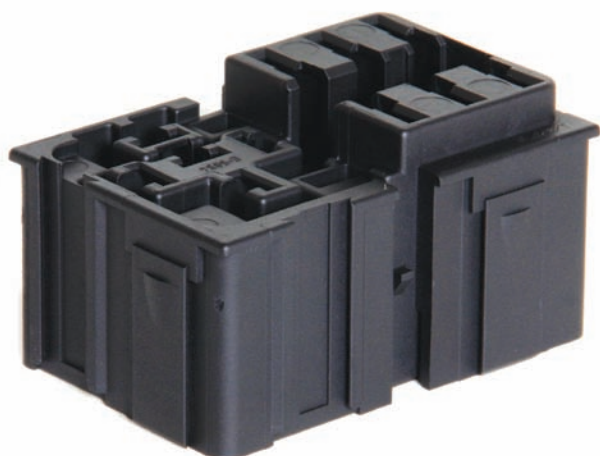


Required Spacer

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-5953	ISO Relay and Maxifuse Spacer	25

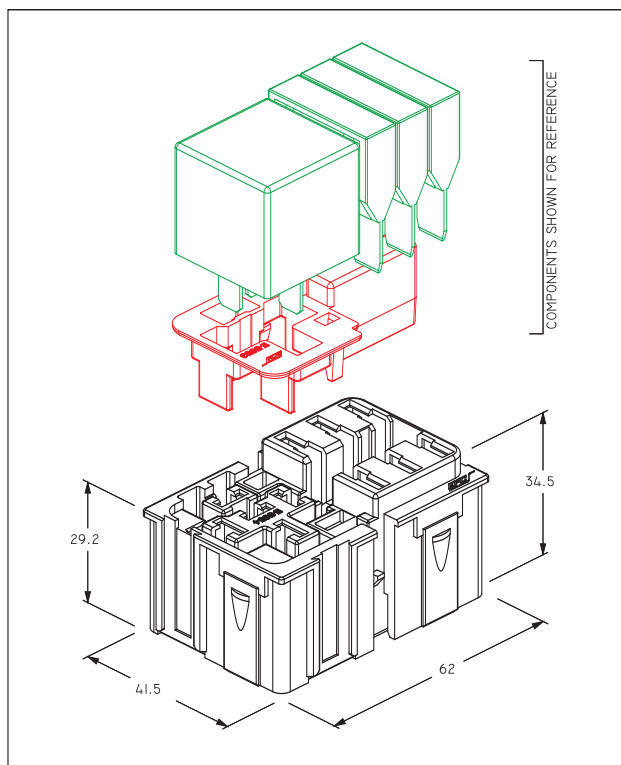


Part Number: E-5968 - Micro (1/2 ISO) Relay and Maxifuse Module

SERVICEABLE CONTENT	QUANTITY
Maxi Fuse	3
Micro (1/2 ISO) Relay	2

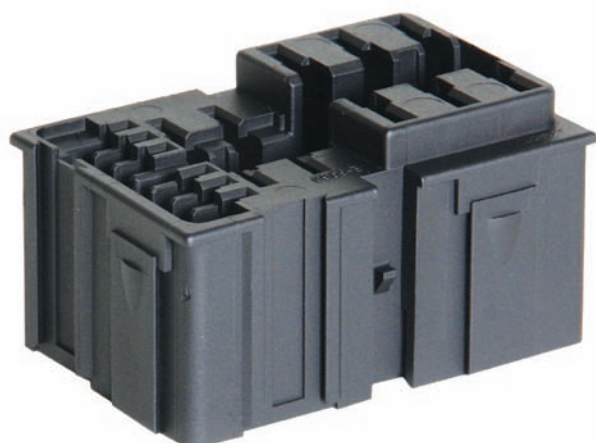

Required Spacer

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-5967	Micro (1/2 ISO) Relay and Maxifuse Spacer	25

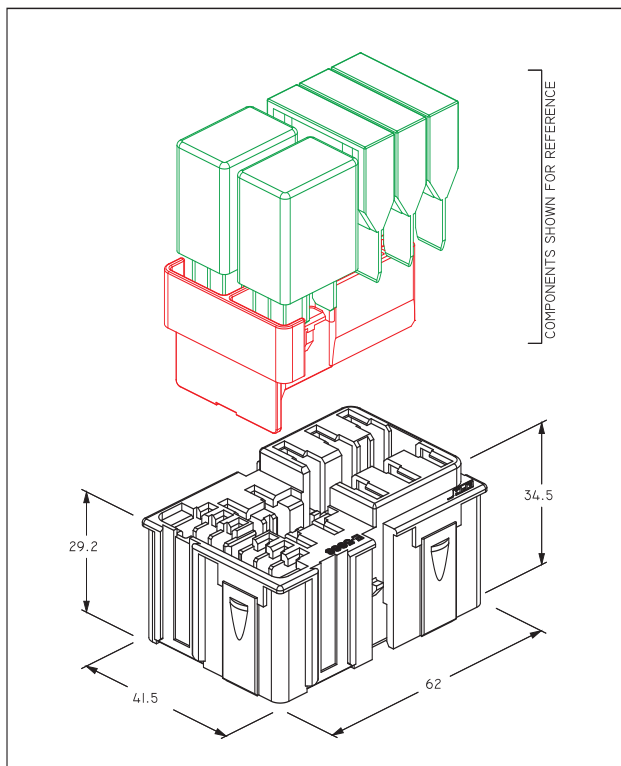


Part Number: E-5972-001 - Single Minifuse Module

SERVICEABLE CONTENT	QUANTITY
Mini Fuse	1



Required Spacer

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-1161	Single Minifuse Spacer	21

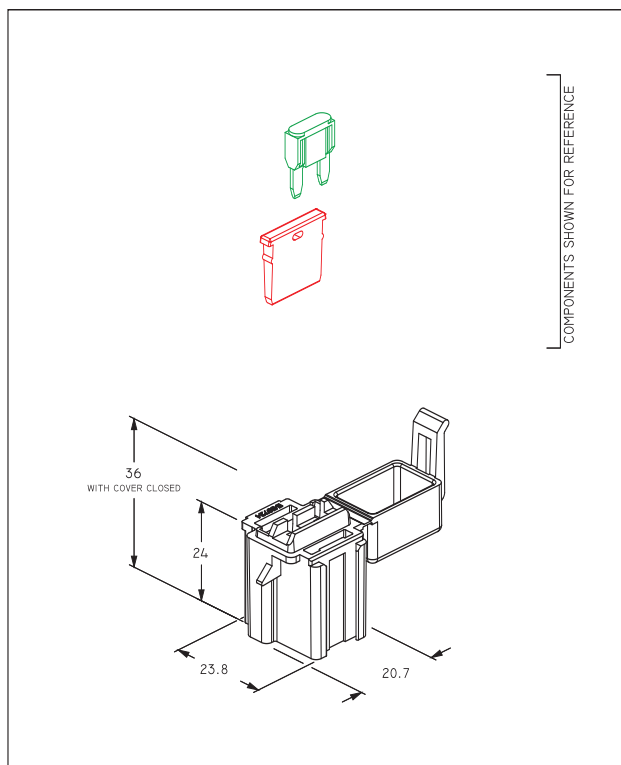


Part Number: E-5972-002 - Single Minifuse Module

SERVICEABLE CONTENT	QUANTITY
Mini Fuse	1




Required Spacer

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-1161	Single Minifuse Spacer	21

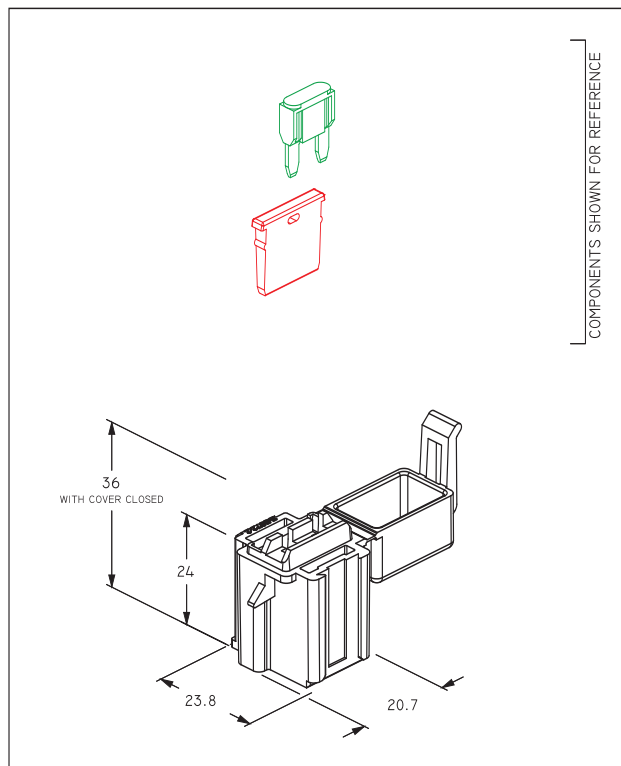


Part Number: E-5979 - High Current, Micro (1/2 ISO) Relay and Minifuse Module

SERVICEABLE CONTENT	QUANTITY
Mini Fuse	3
High Current Relay	1
Micro (1/2 ISO) Relay	1

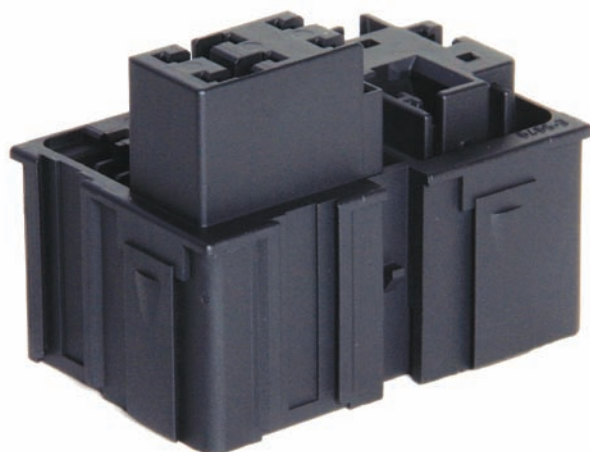

Required Spacer

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-5978	High Current, Micro (1/2 ISO) Relay and Minifuse Spacer	25

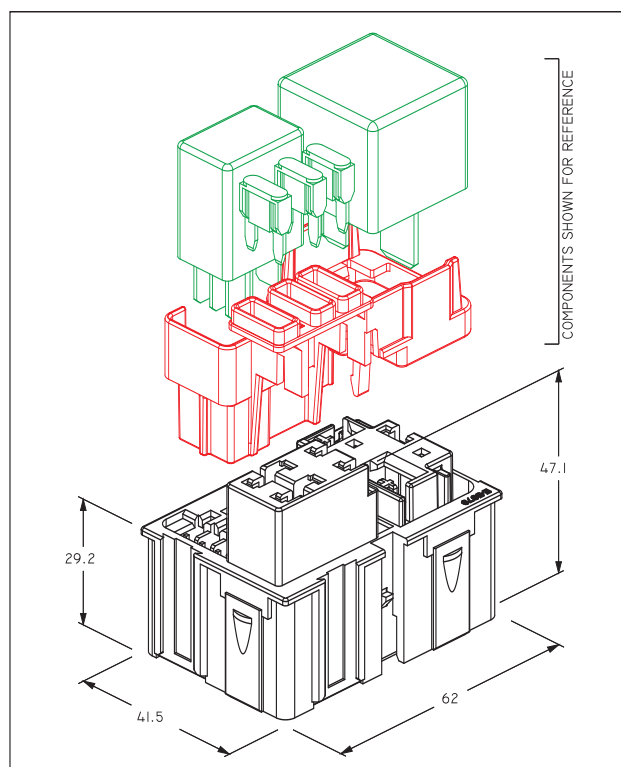


Part Number: E-6015 - J-Case Module

SERVICEABLE CONTENT	QUANTITY
J-Case Fuse	8




Required Spacer

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-6016	J-Case Spacer	26

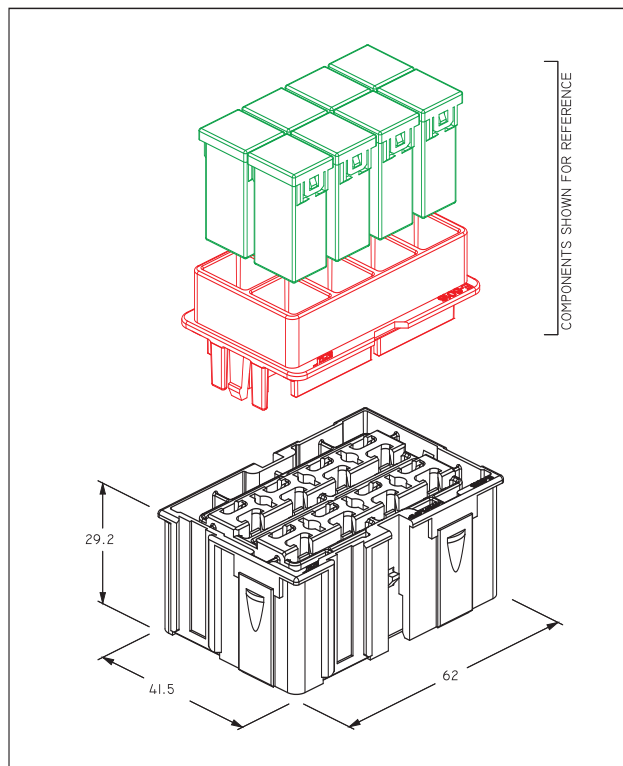


Part Number: E-6051 - High Current Relay Half Module

SERVICEABLE CONTENT	QUANTITY
High Current Relay	1

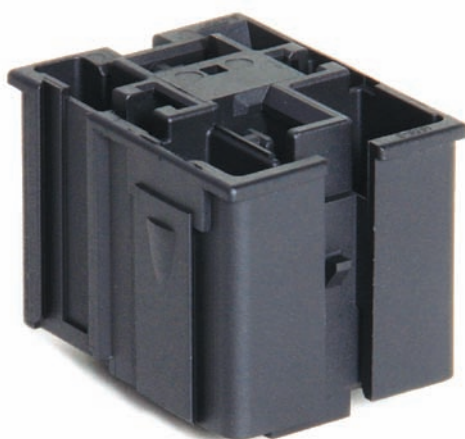

Required Spacer

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-6052	High Current Relay Half Module Spacer	26

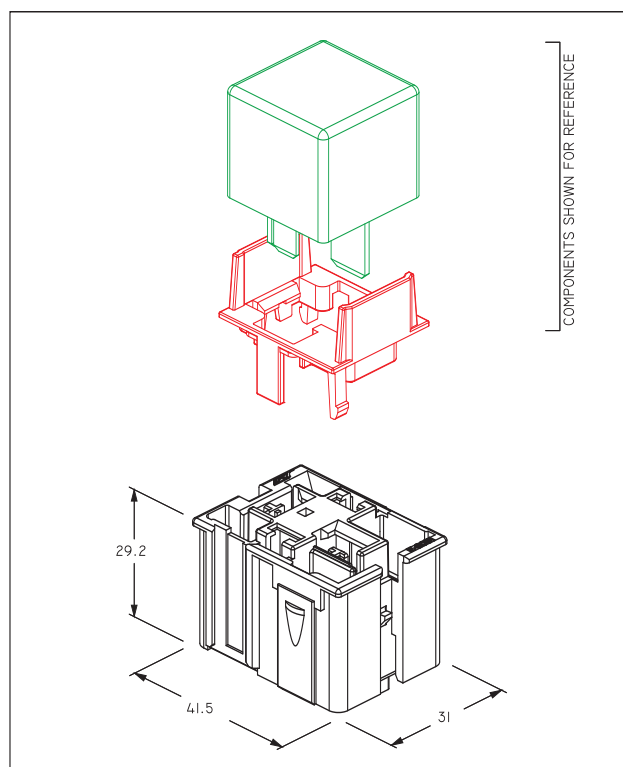


Part Number: E-6054 - High Current and ISO Relay Module

SERVICEABLE CONTENT	QUANTITY
High Current Relay	1
Full ISO Relay	1



Required Spacer

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-6055	High Current and ISO Relay Spacer	26

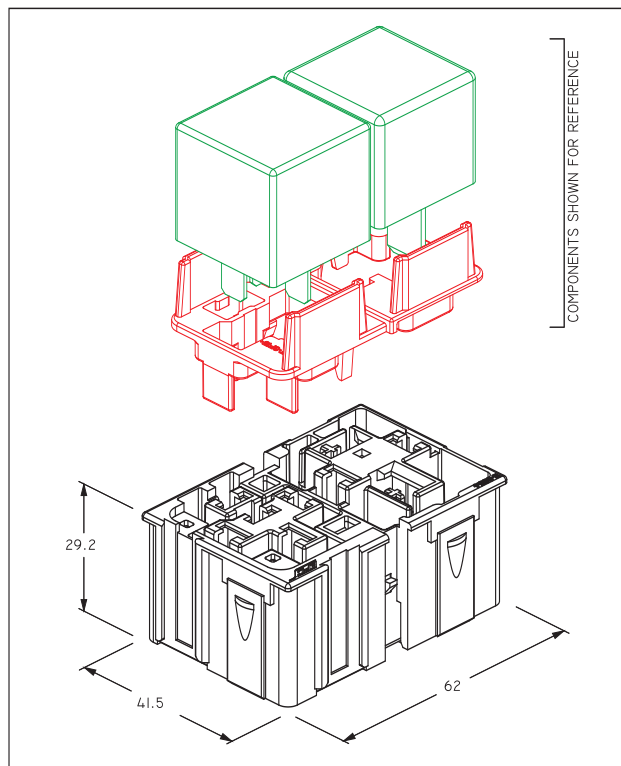


Part Number: E-6151 - Micro 280 Relay Module

SERVICEABLE CONTENT	QUANTITY
Micro 280 Relay	4
OR	
Ultra-Micro Relay	6




Required Spacer

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-6152	Micro 280 Relay Spacer	27

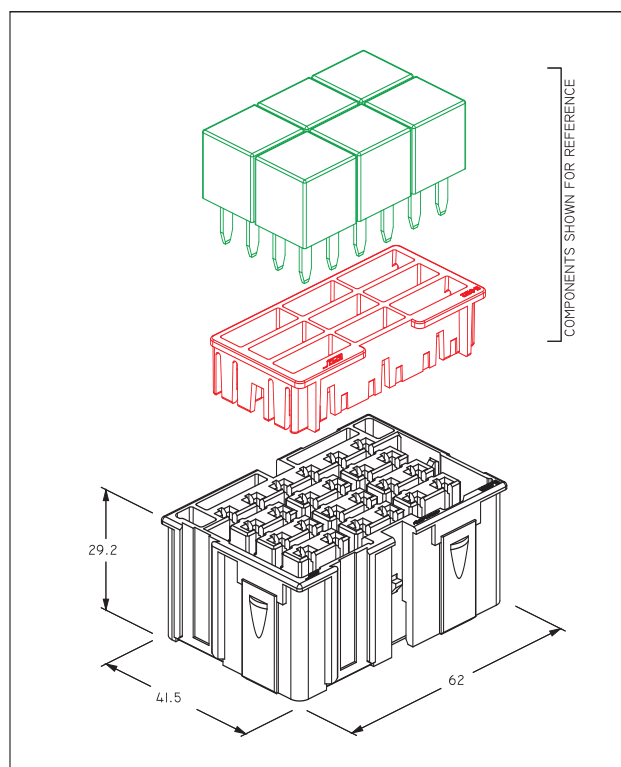


Part Number: R-65264-001 - ISO Relay and Minifuse Type Double Module

SERVICEABLE CONTENT	QUANTITY
Full ISO Relay	4
And 4 of the Following Devices	
Mini Fuse	4
Poly Switch	
Mini Fuse Type Circuit Breaker	

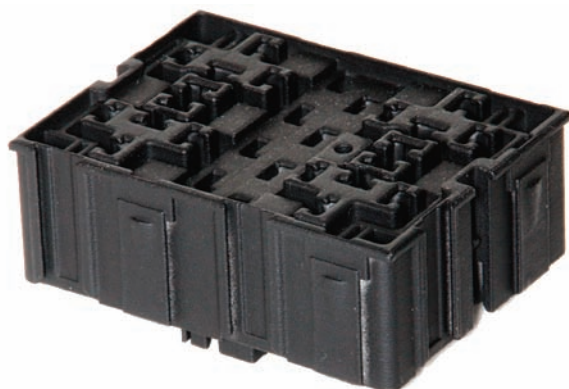


Required Spacer



PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
R-65265-001	ISO Relay and Minifuse Type Spacer	27

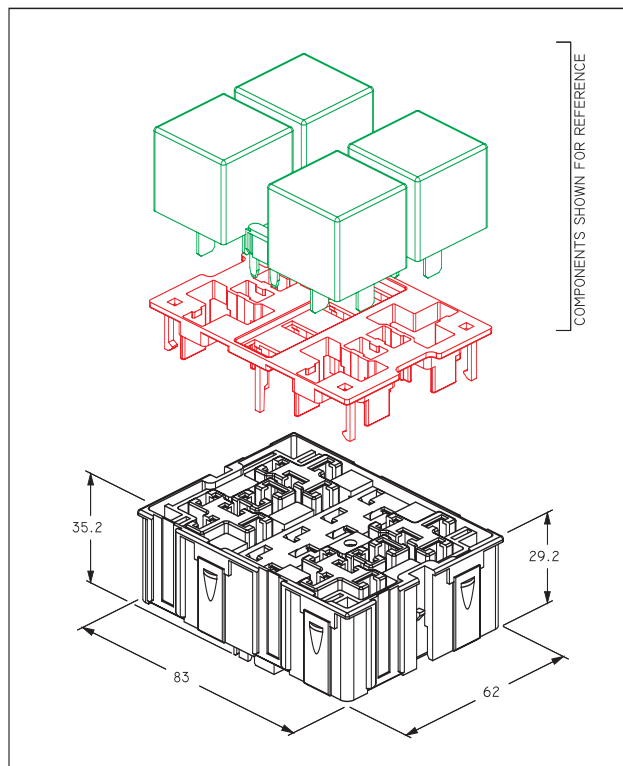

SPACERS SECTION

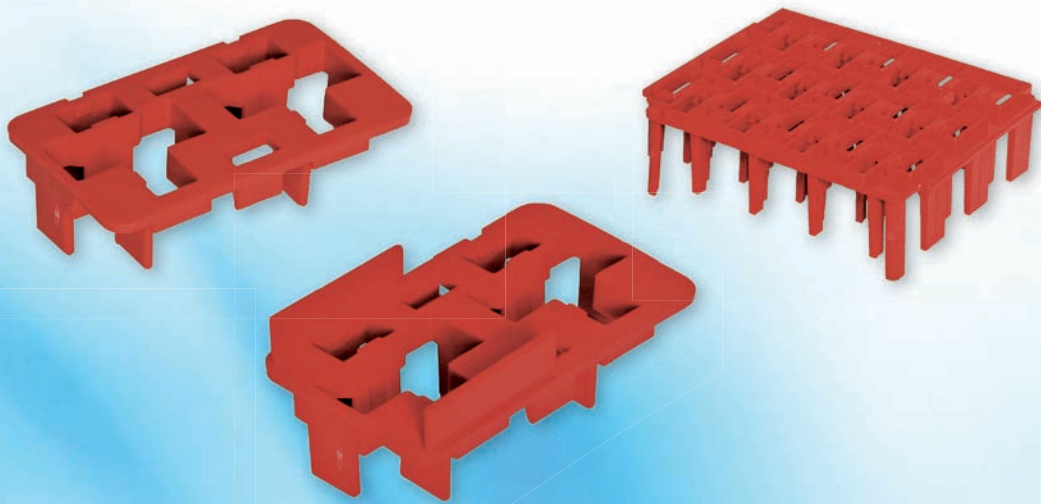



Part Number: E-0386 - ISO Relay Spacer

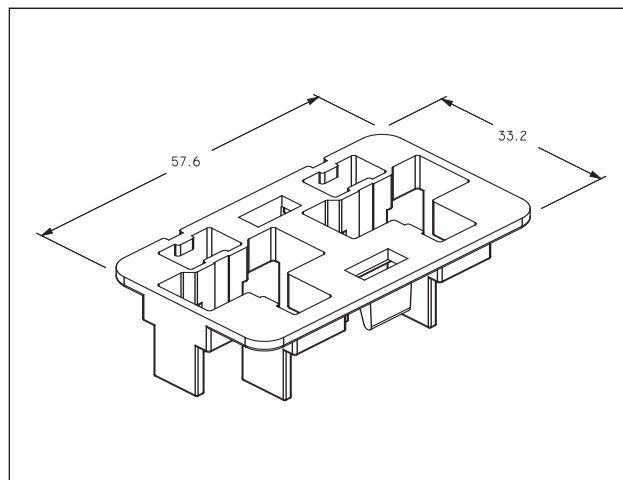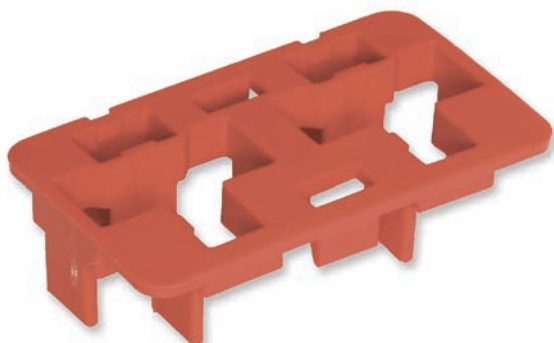

Associated Module

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-0379	ISO Relay Module	6



Part Number: E-0387 - Micro (1/2 ISO) Relay Spacer

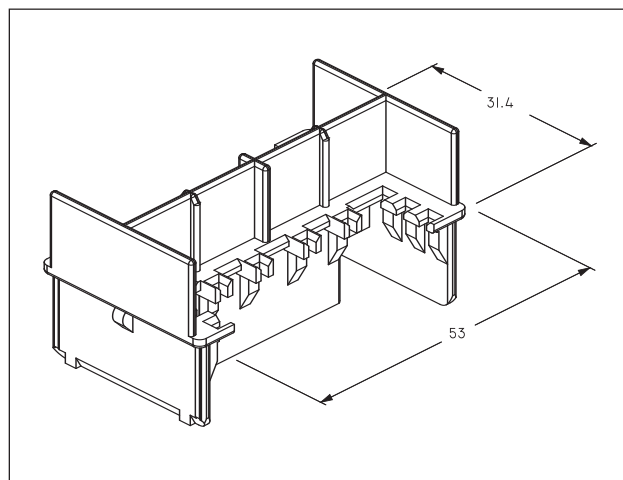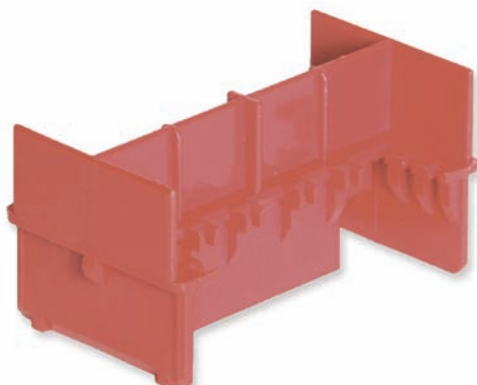

Associated Module

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-0380	Micro (1/2 ISO) Relay Module	6



Part Number: E-0439 - Minifuse Spacer

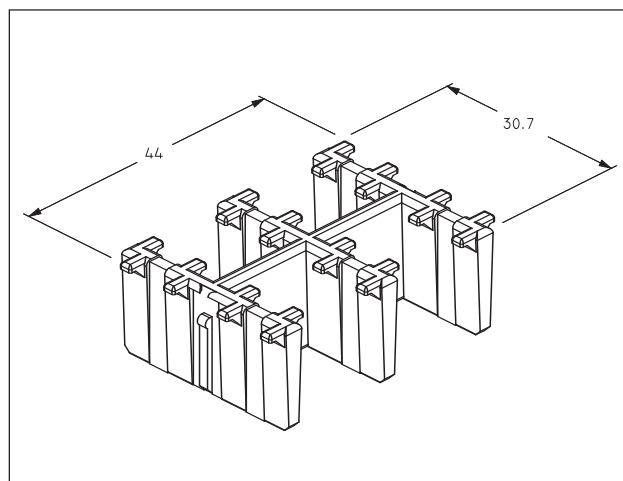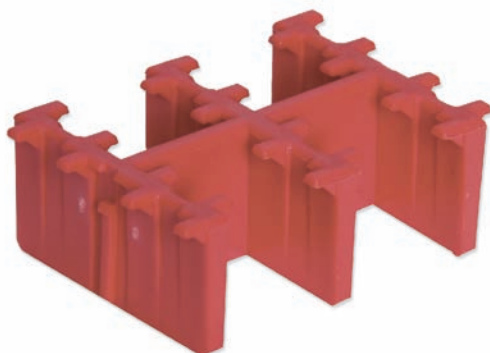

Associated Module

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-0433	Minifuse Module	7



Part Number: E-0779 - ISO Relay and Flasher Spacer

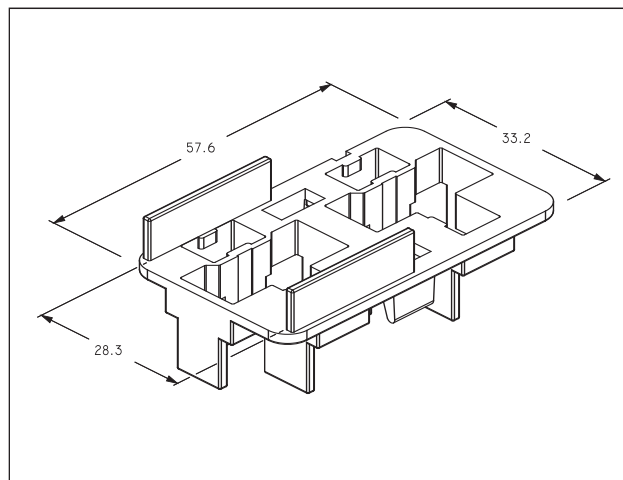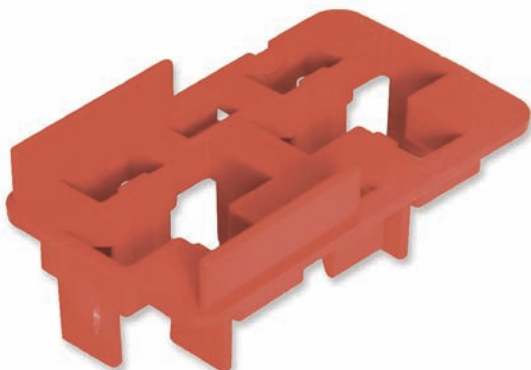

Associated Module

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-0379	ISO Relay Module	6



Part Number: E-0791 - ISO and Micro (1/2 ISO) Relay Spacer

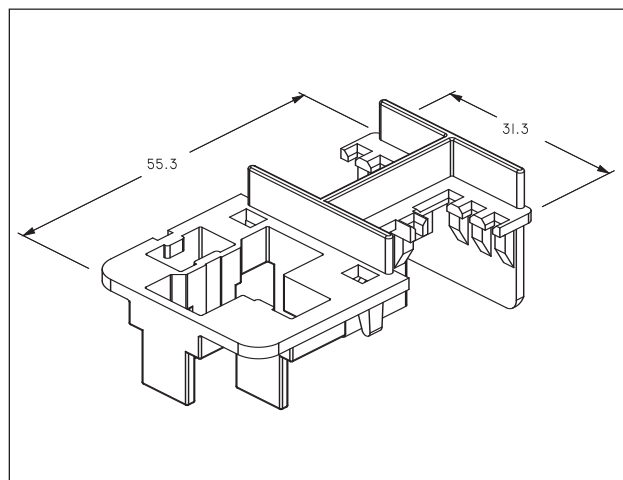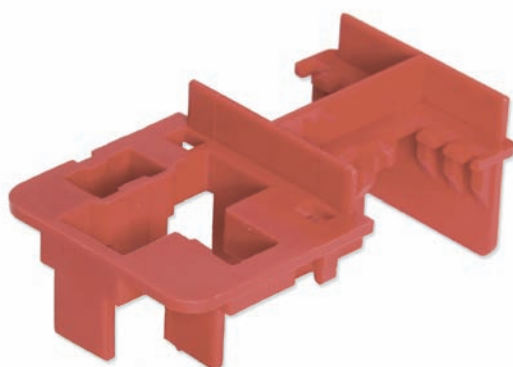

Associated Module

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-0777	ISO and Micro (1/2 ISO) Relay Module	8


Part Number: E-1003 - ISO Relay and Diode Spacer

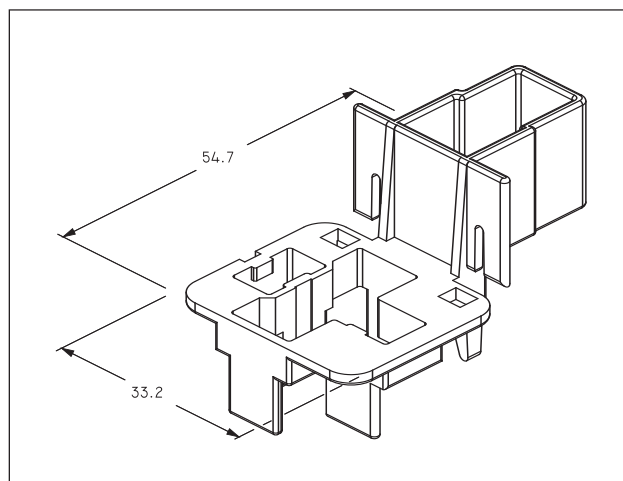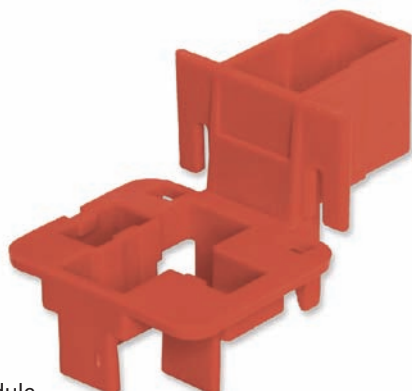

Associated Module


PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-0946	ISO Relay and Diode Module	8

Part Number: E-1090 - Minifuse Half Module Spacer

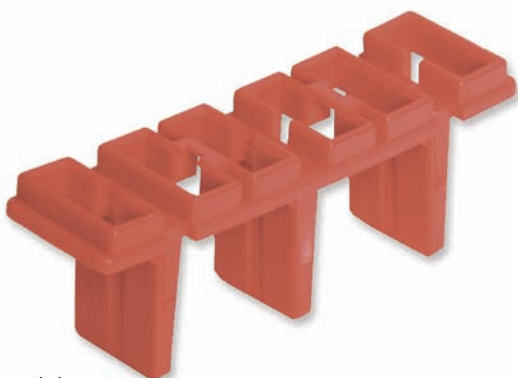

Associated Module

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-1012	Minifuse Half Module	9

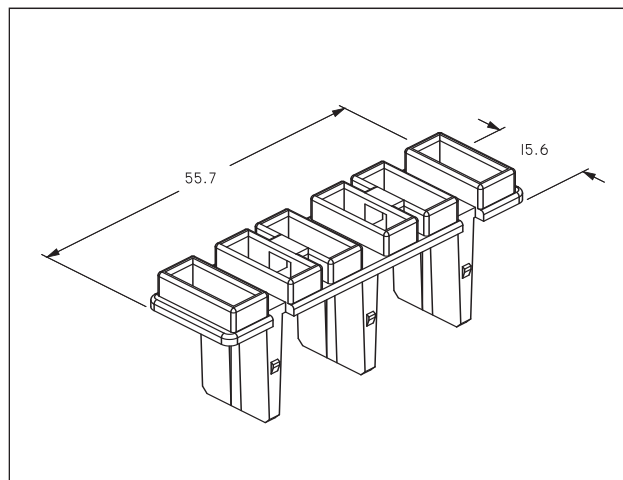


Part Number: E-1161 - Single Minifuse Spacer




Associated Module

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-5972	Single Minifuse Module	13, 14

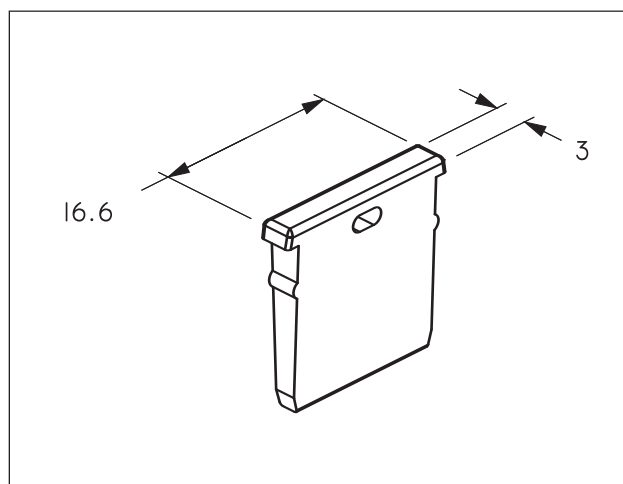


Part Number: E-1325 - High Current and ISO Relay Spacer

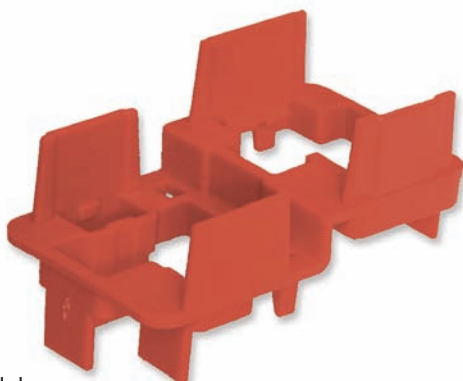


Associated Module

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-1324	High Current and ISO Relay Module	9

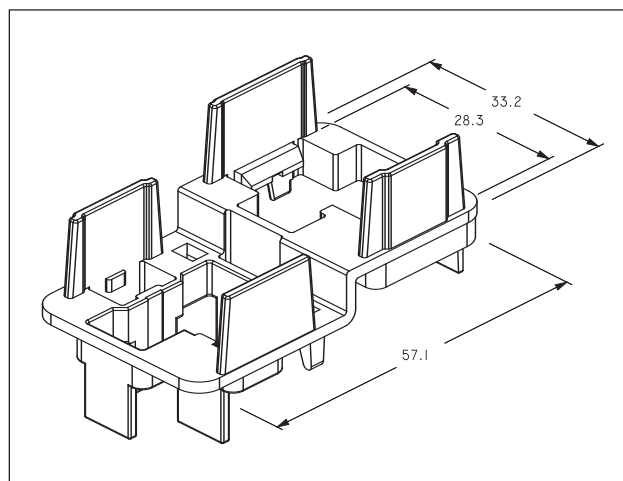


Part Number: E-1579 - Maxifuse Spacer

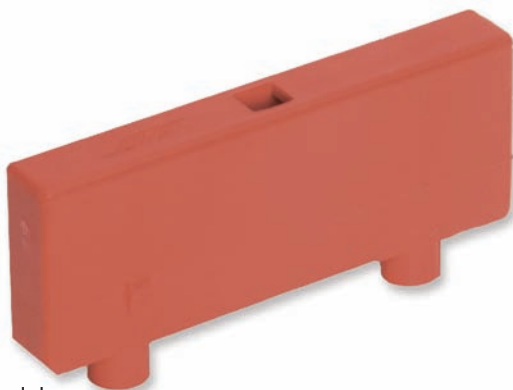


Associated Module

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-0431	Maxifuse Module	7

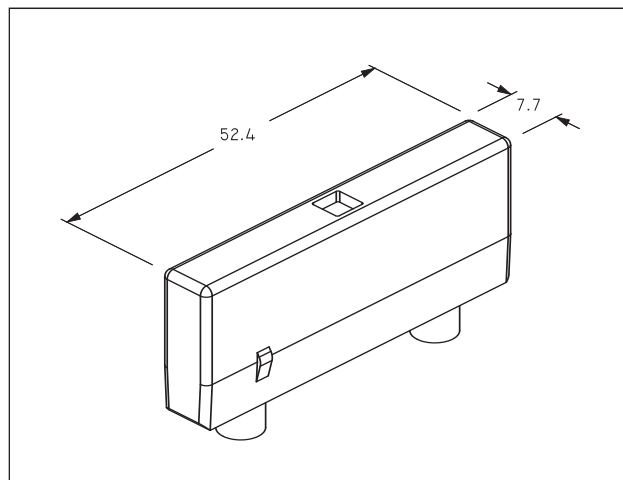


Part Number: E-1583 - ISO Relay Half Module Spacer

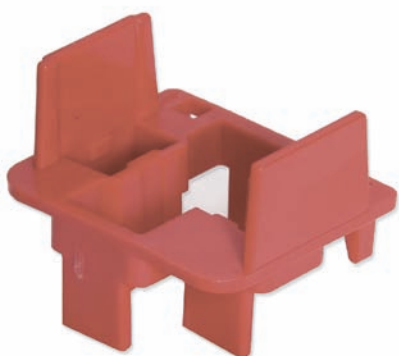


Associated Module

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-1582	ISO Relay and Minifuse Module	10

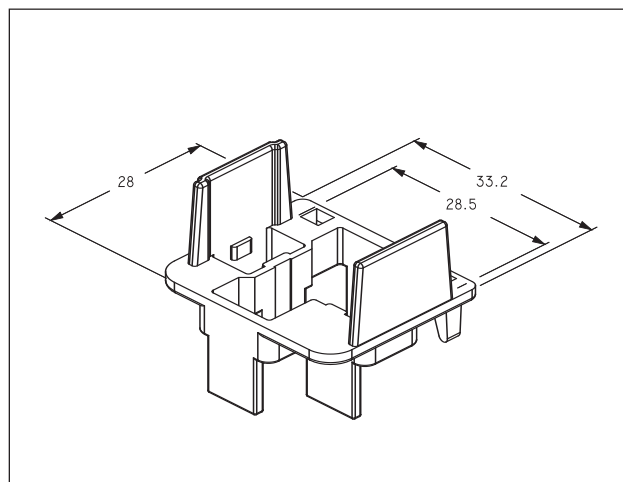


Part Number: E-1589 - Micro (1/2 ISO) Relay Half Module Spacer

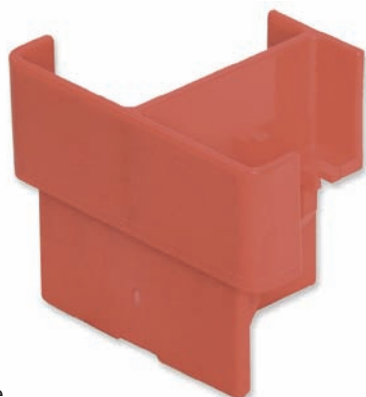


Associated Module

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-1588	Micro (1/2 ISO) Relay Half Module	11

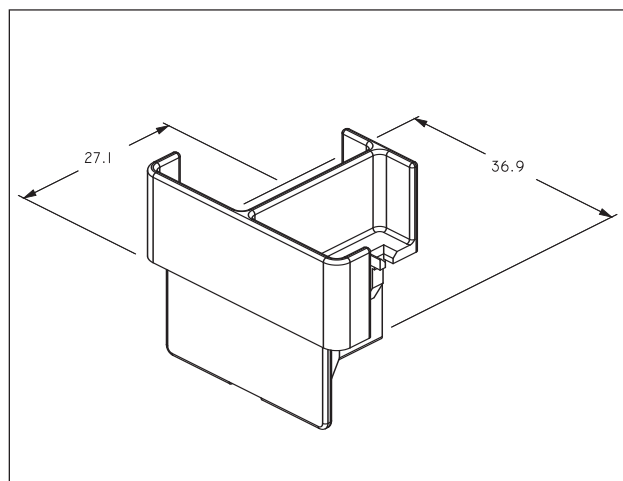


Part Number: E-1594 - 27 Minifuse Double Module Spacer

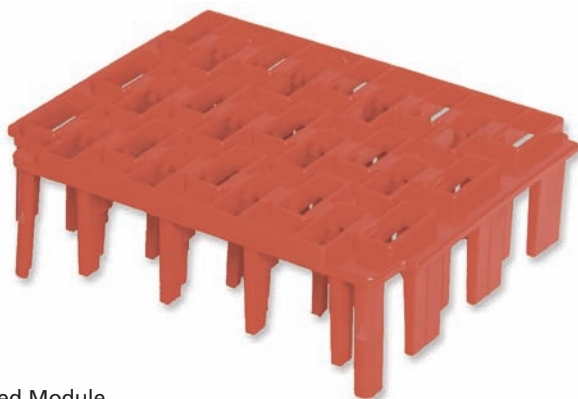


Associated Module

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-1546	27 Minifuse Double Module	10

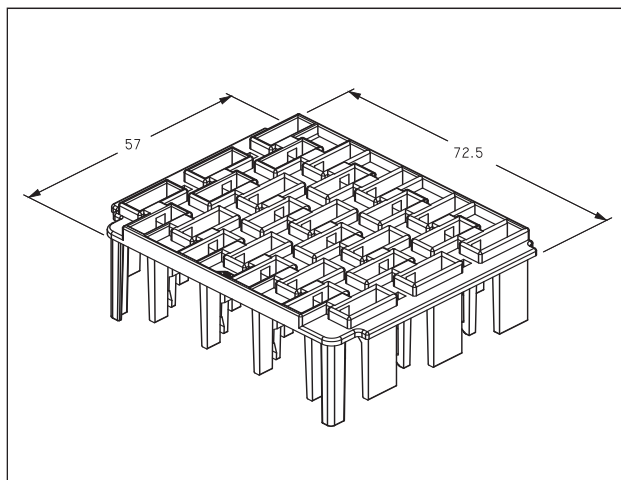


Part Number: E-1865 - Minifuse Half Module Spacer

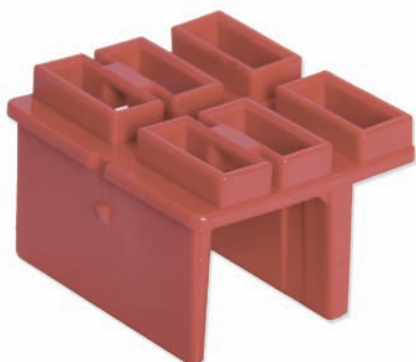


Associated Module

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-1582	ISO Relay and Minifuse Module	10

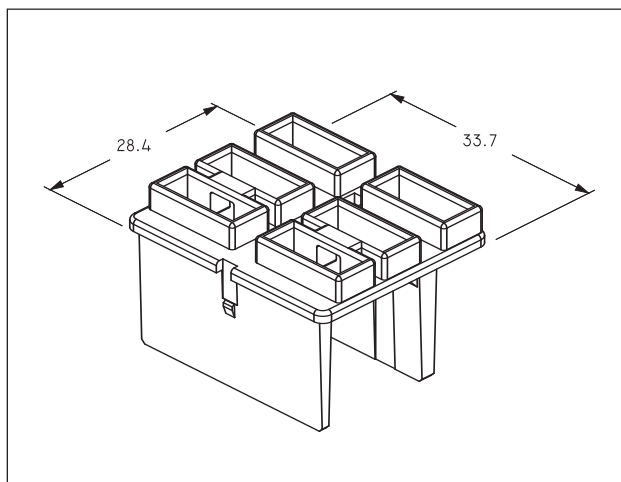


Part Number: E-2152 - Electronic Flasher and Micro (1/2 ISO) Relay Spacer

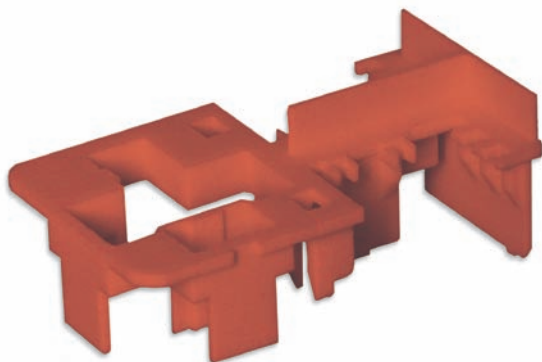

Associated Module

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-0777	ISO and Micro (1/2 ISO) Relay Module	8

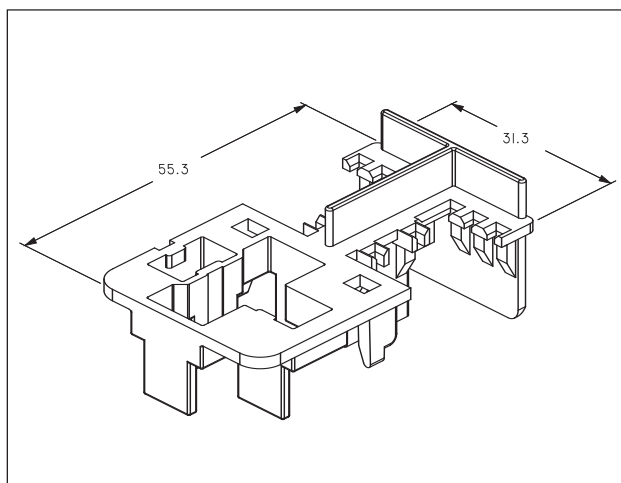


Part Number: E-4322 - Single J-Case Spacer




Associated Module

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-4321	Single J-Case Module	11

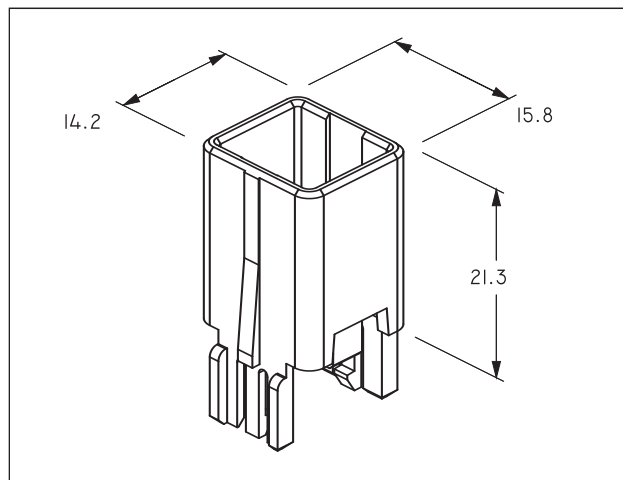


Part Number: E-5012 - High Current and ISO Relay Spacer

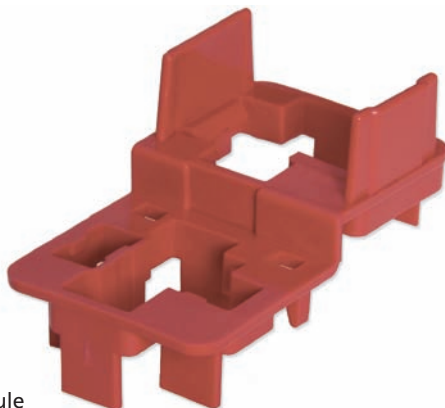

Associated Module

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-1324	High Current and ISO Relay Module	9

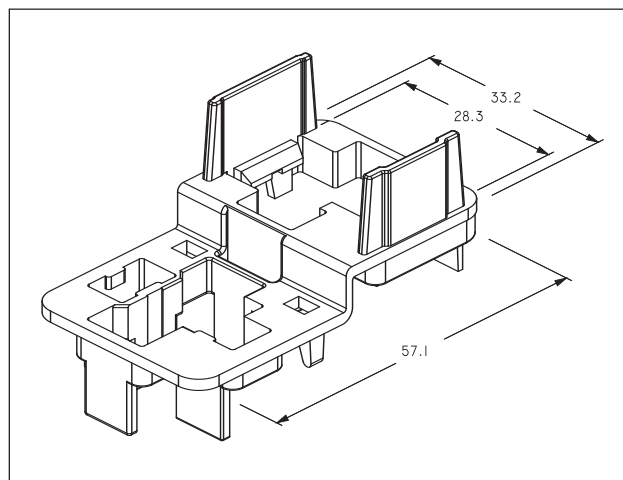


Part Number: E-5528 - High Current Relay Spacer




Associated Module

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-5529	High Current Relay Module	12

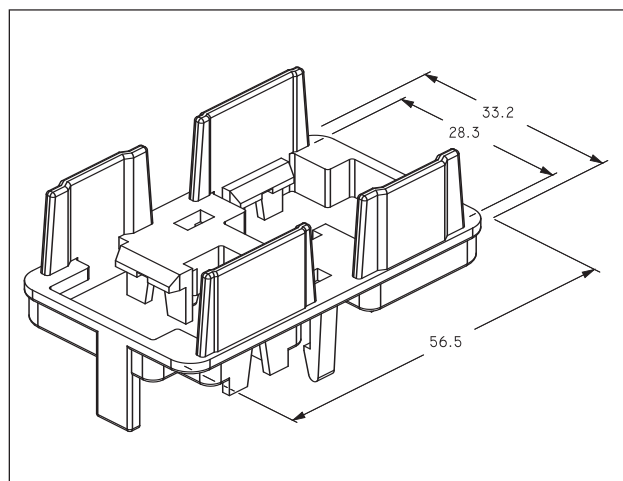


Part Number: E-5953 - ISO Relay and Maxifuse Spacer

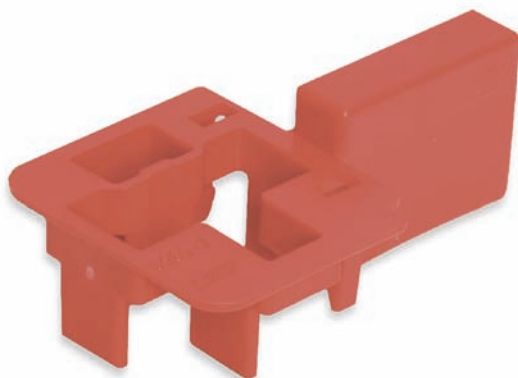


Associated Module

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-5954	ISO Relay and Maxifuse Module	12

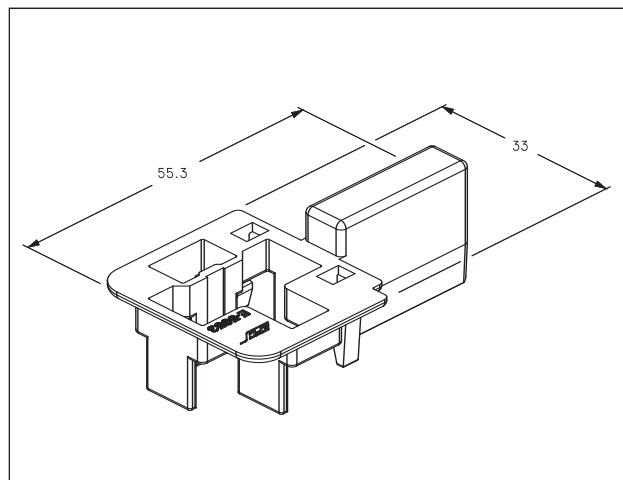


Part Number: E-5967 - Micro (1/2 ISO) Relay and Maxifuse Spacer

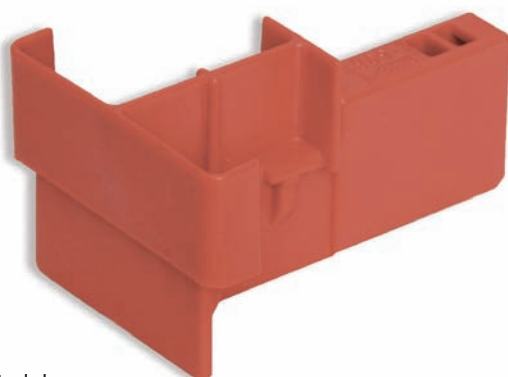


Associated Module

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-5968	Micro (1/2 ISO) Relay and Maxifuse Module	13

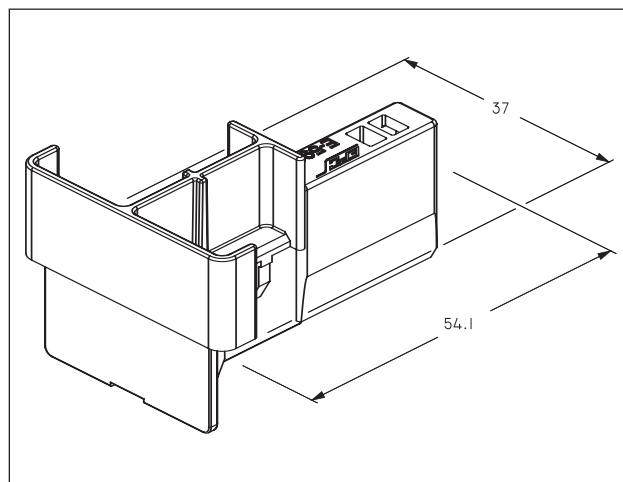


Part Number: E-5978 - High Current Micro (1/2 ISO) Relay and Minifuse Spacer

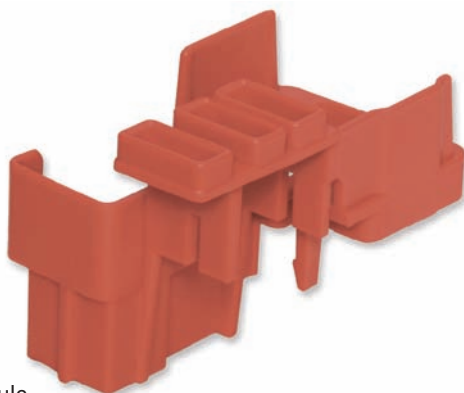

Associated Module

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-5979	High Current, Micro (1/2 ISO) and Minifuse Module	14

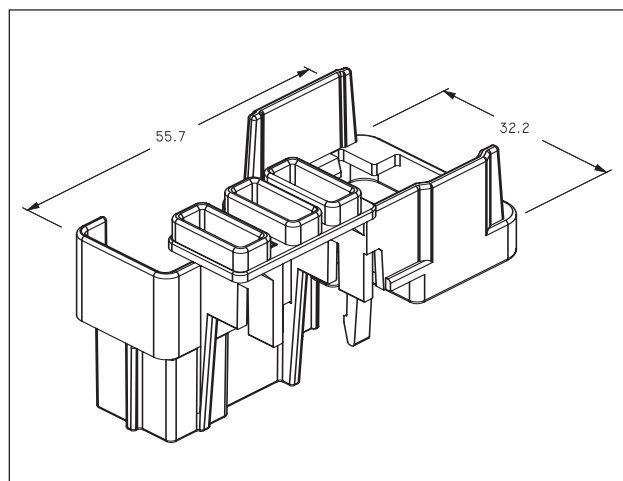


Part Number: E-6016 - J-Case Spacer




Associated Module

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-6015	J-Case Module	15

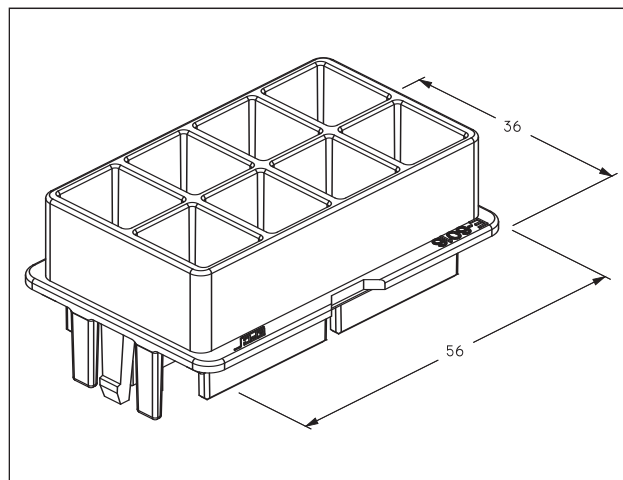


Part Number: E-6052 - High Current Relay Half Module Spacer

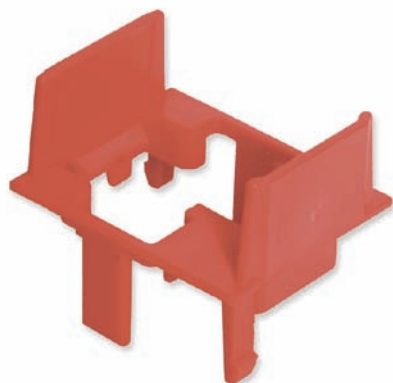


Associated Module

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-6051	High Current Relay Half Module	15

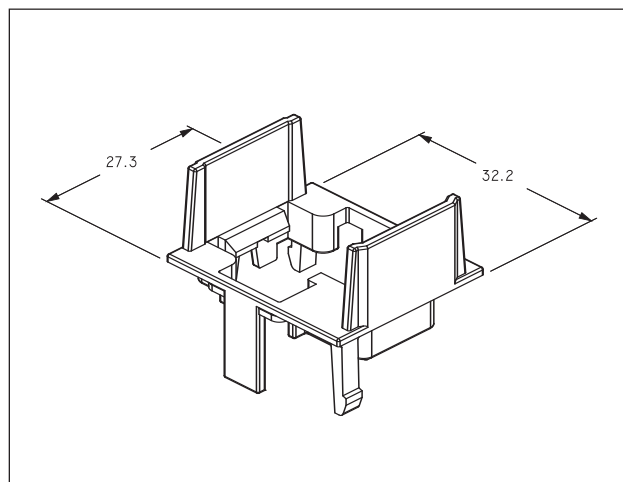


Part Number: E-6055 - High Current and ISO Relay Spacer

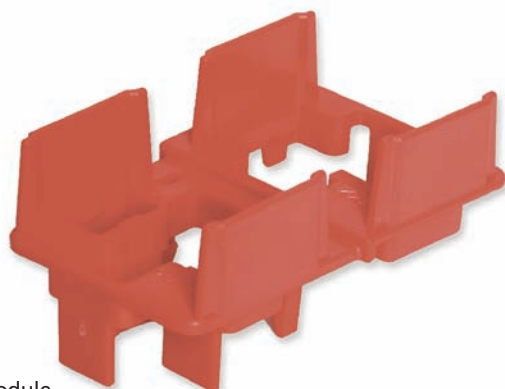


Associated Module

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-6054	High Current and ISO Relay Module	16

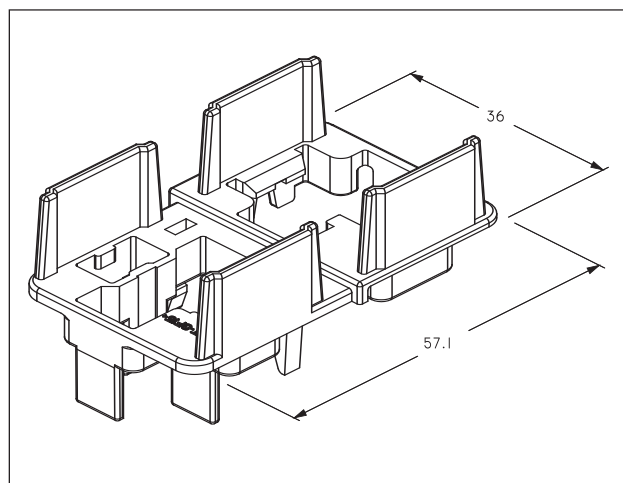


Part Number: E-6152 - Micro 280 Series Relay Spacer

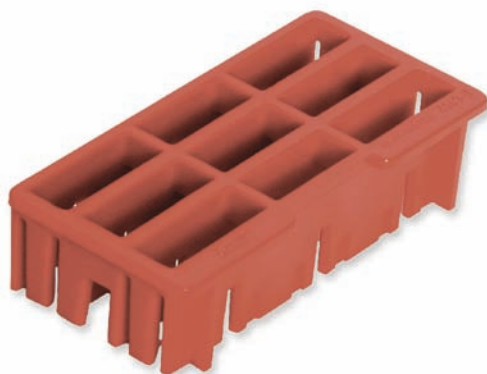


Associated Module

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-6151	Micro 280 Series Relay Module	16

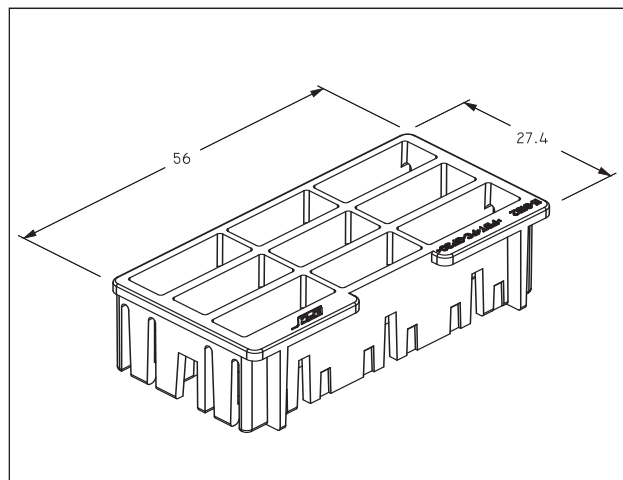


Part Number: R-65265-001 - ISO Relay and Minifuse Type Double Module Spacer

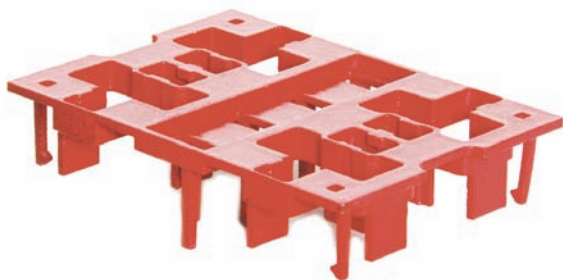


Associated Module


PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
R-65264-001	ISO Relay and Minifuse Type Double Module	17

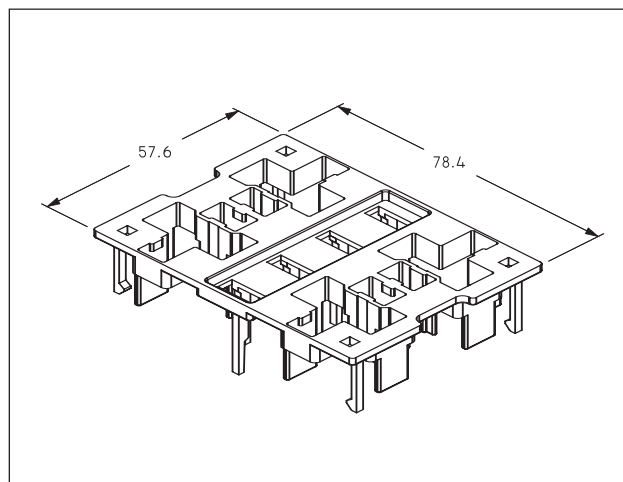


BRACKETS SECTION

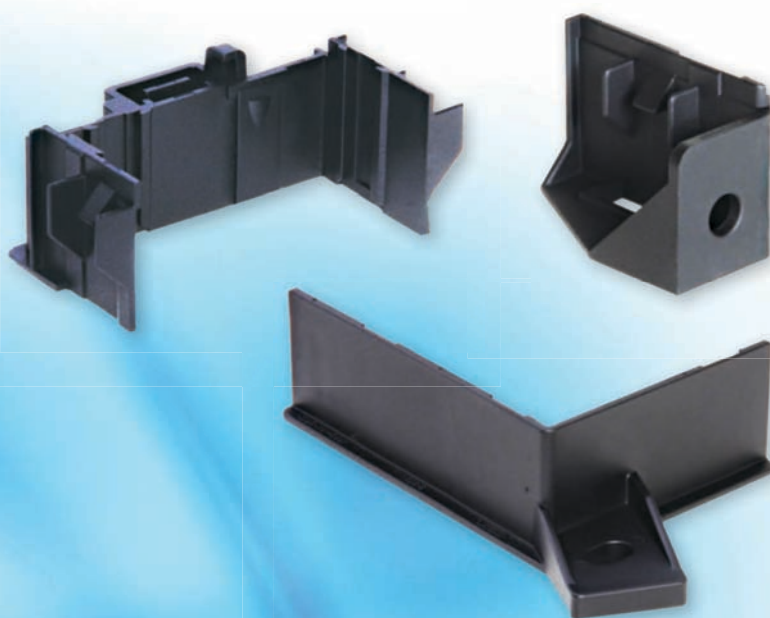


Part Number: E-0382 - Right End Bracket

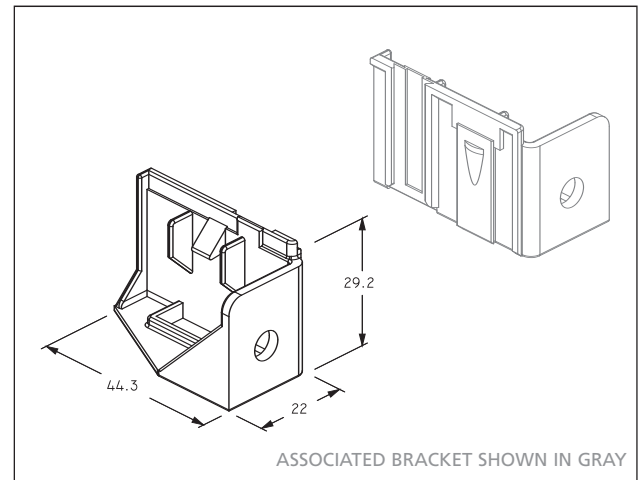


Part Number: E-0383 - Left End Bracket

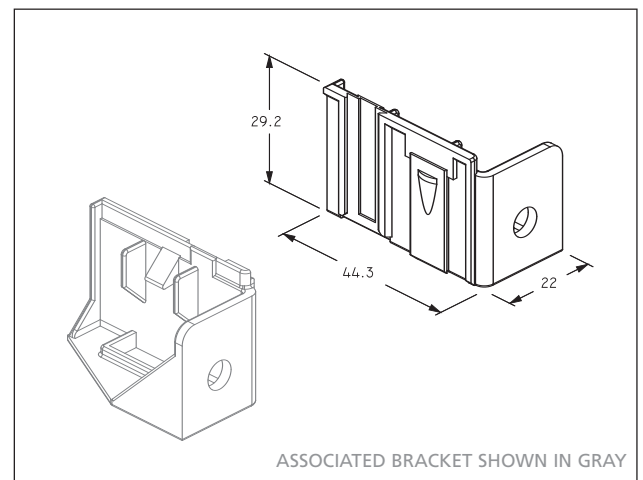


Part Number: E-0452 - Left Side Bracket

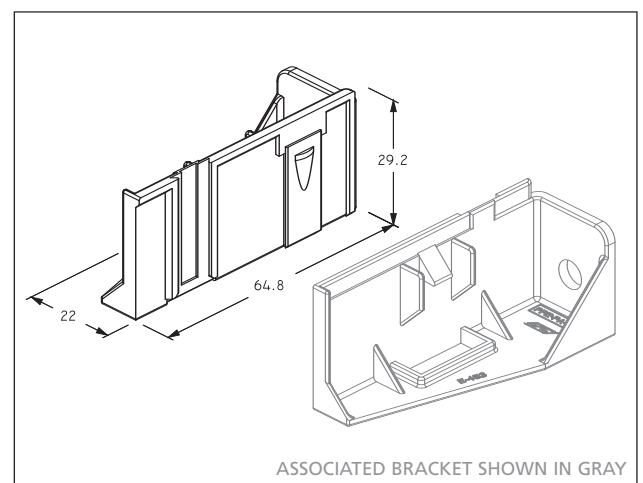



Part Number: E-0453 - Right Side Bracket

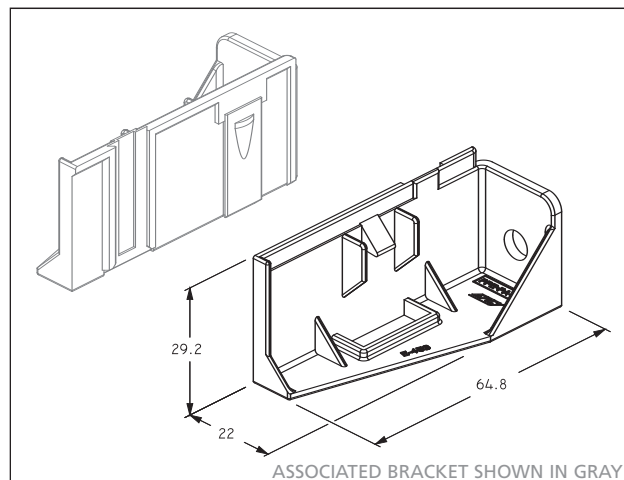



Part Number: E-0650 - Right End Extended Bracket

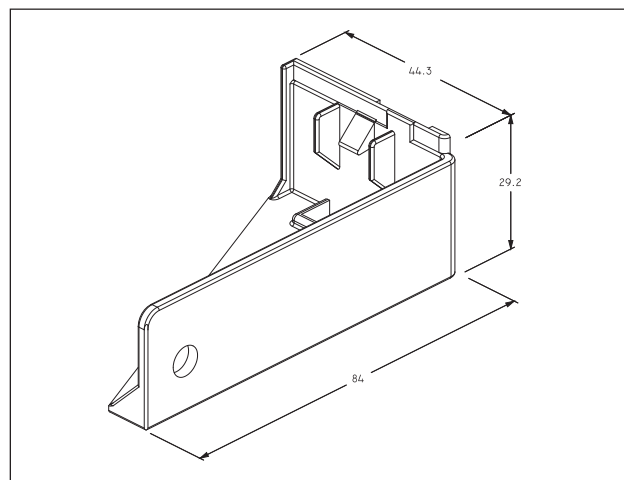


Part Number: E-0819 - Two Module Snap-on Bracket

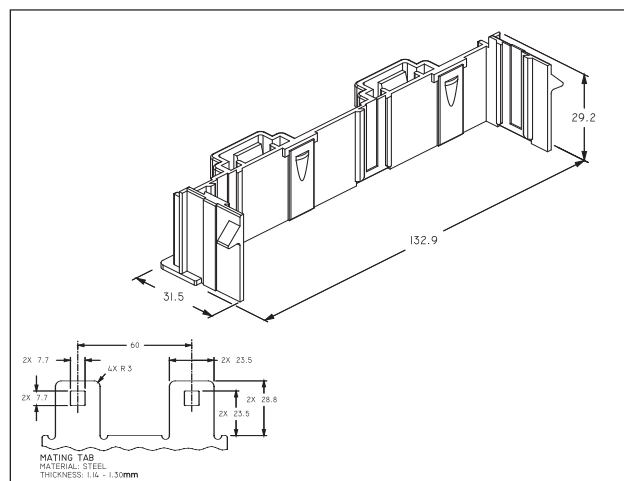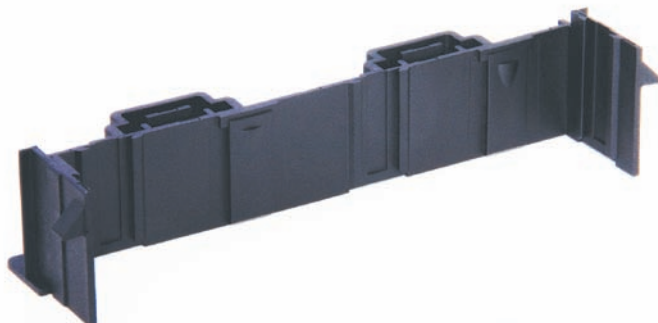


Part Number: E-0820 - Single Module Snap-on Bracket

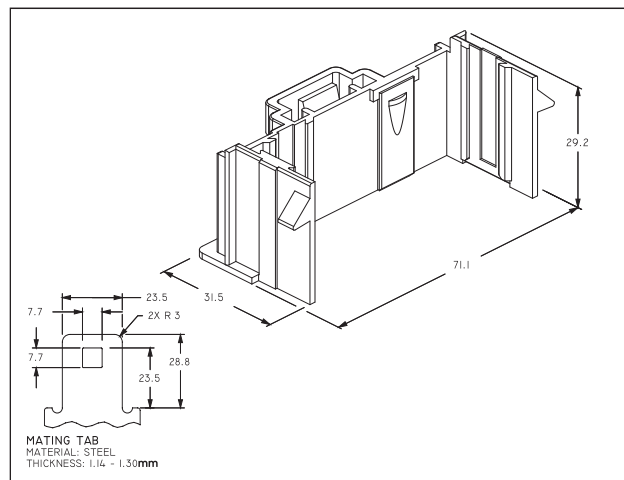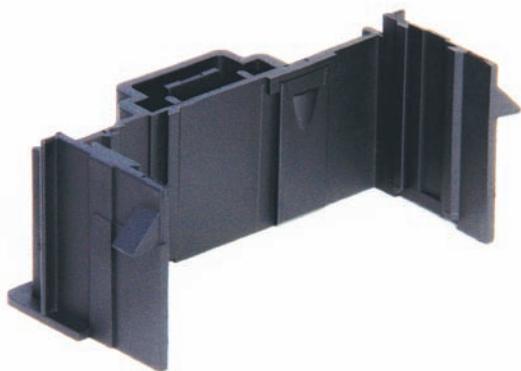


Part Number: E-0893 - Lower Bracket

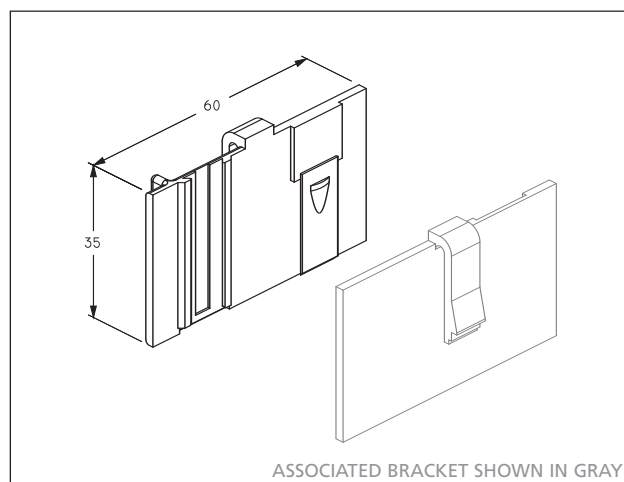


Part Number: E-0894 - Upper Bracket

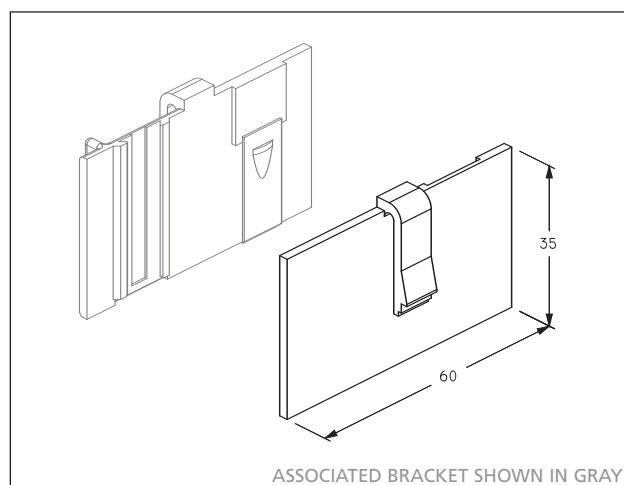



Part Number: E-0896 - Right End Bracket

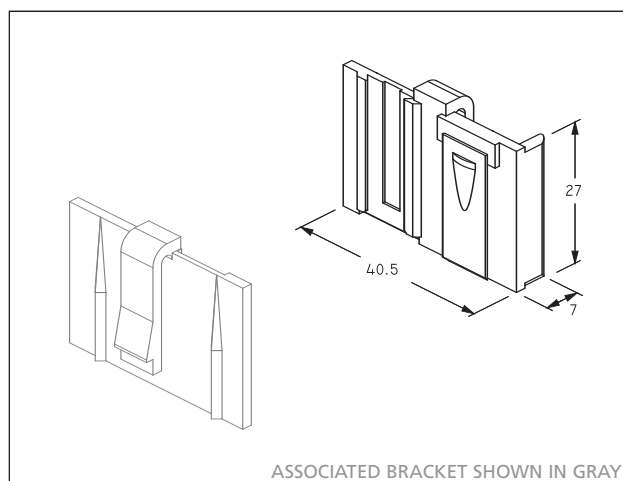


Part Number: E-0897 - Left End Bracket

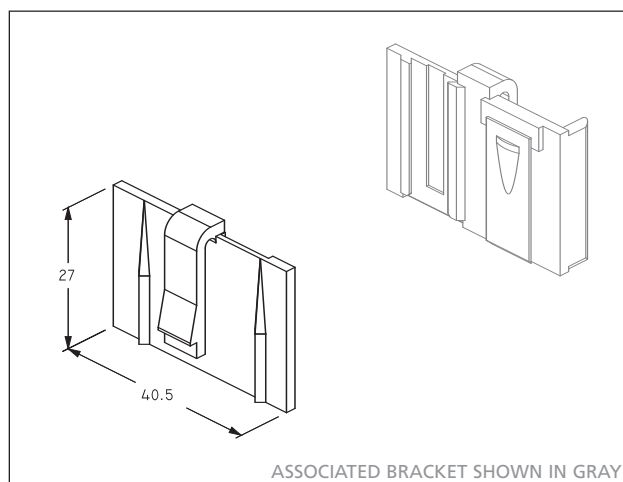



Part Number: E-1092 - Half Module Bracket

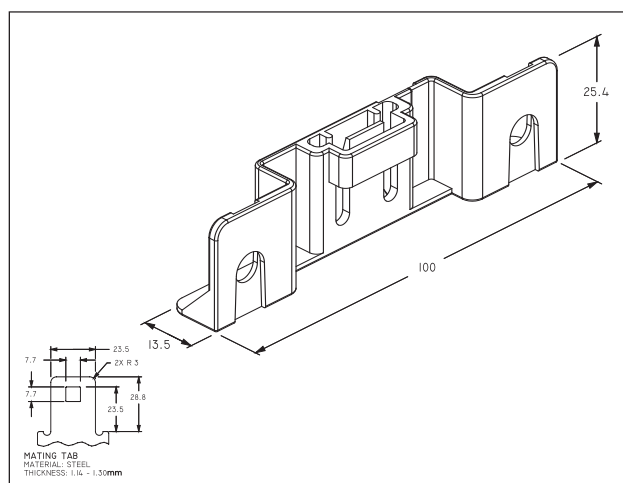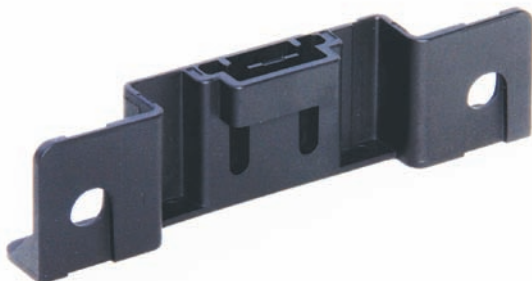



Part Number: E-1299 - Two Module Snap-on Bracket

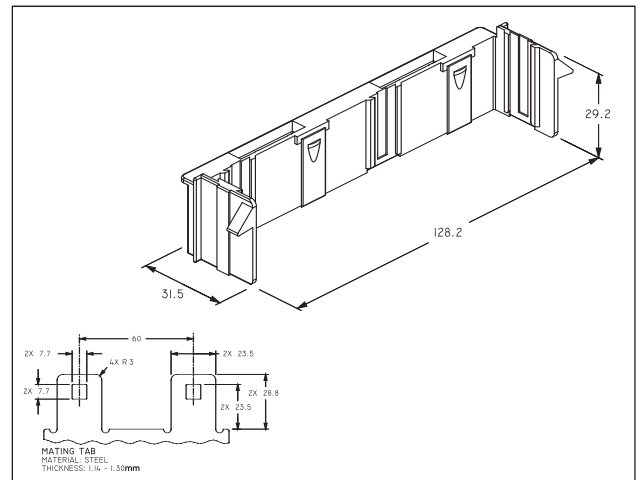



Part Number: E-1492 - Three Module Snap-on Bracket

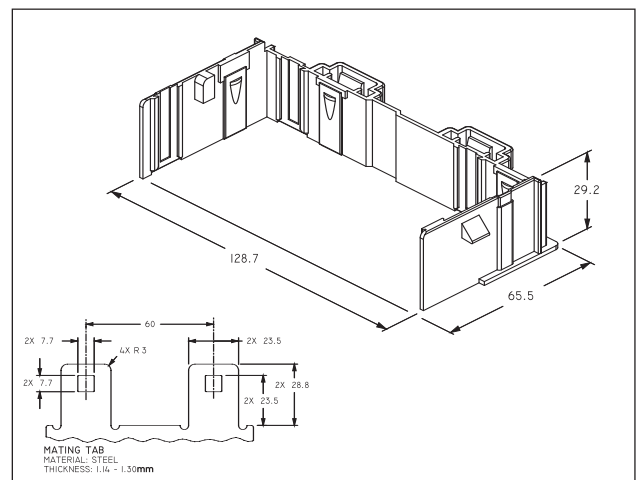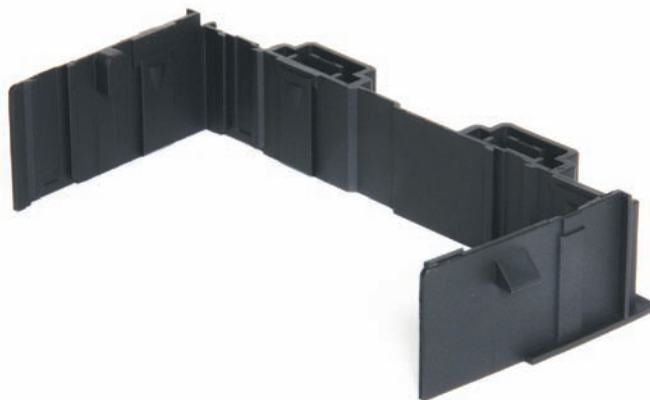



Part Number: E-1504 - Single Module Skirt Bracket

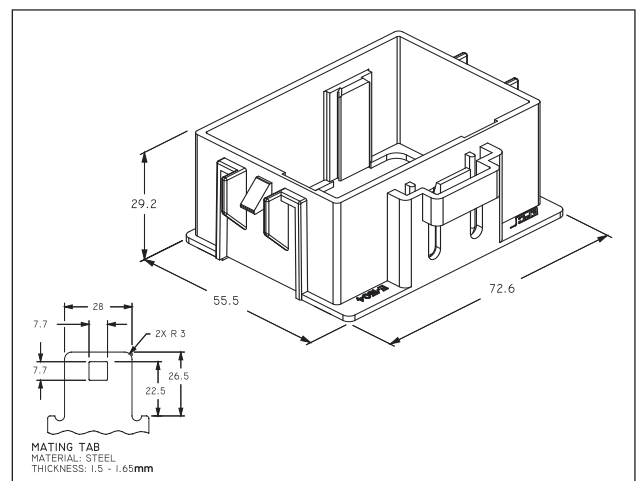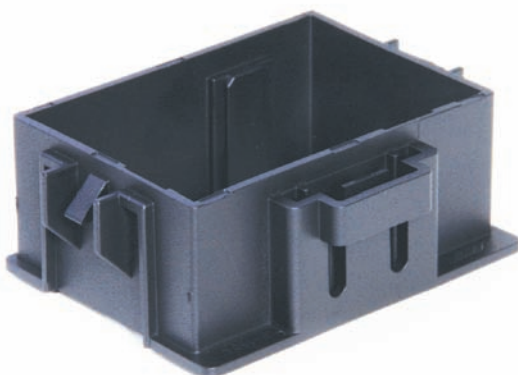



Part Number: E-1592 - Half Module Bracket

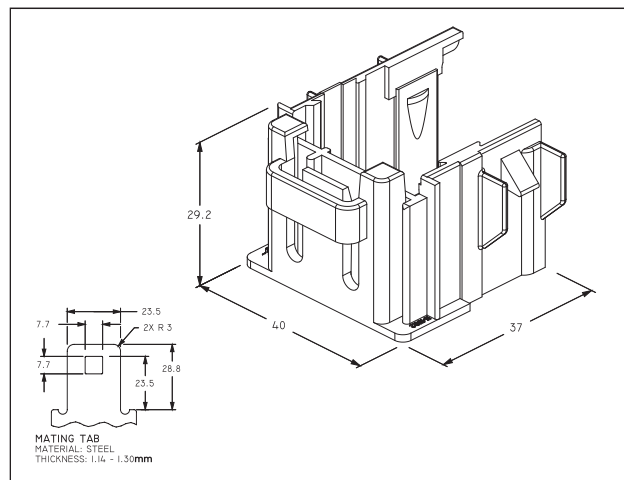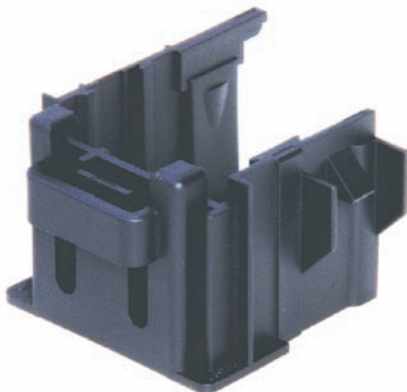


Part Number: E-1692 - Left Fuse Panel Bracket

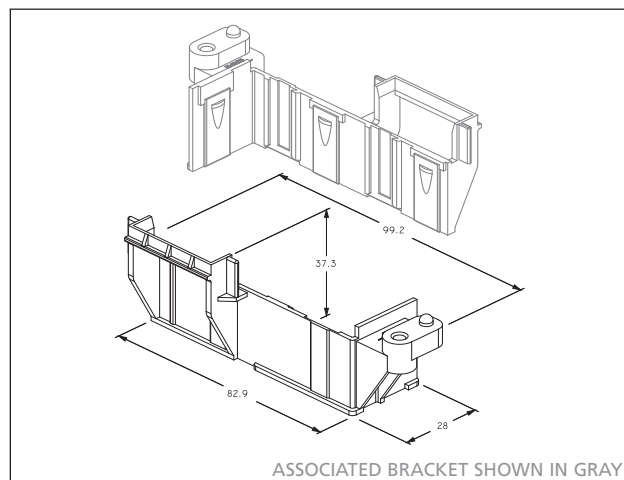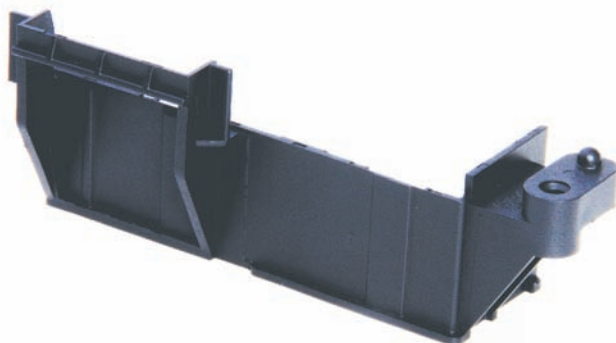



Part Number: E-1693 - Right Fuse Panel Bracket

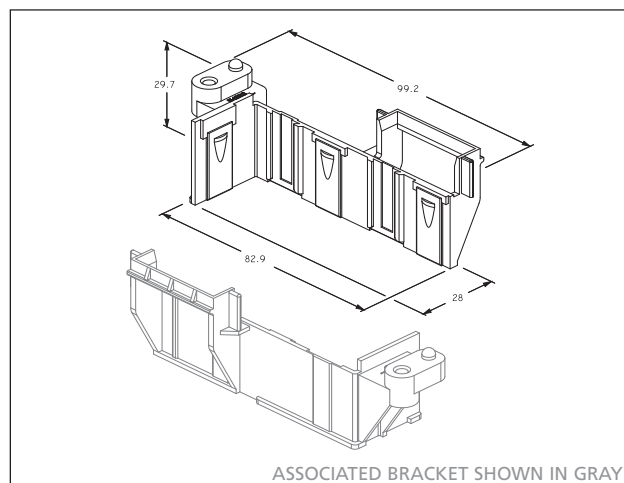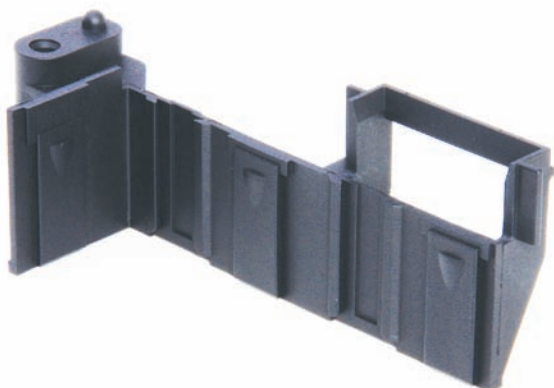



Part Number: E-1694 - Two Module Snap-on Bracket

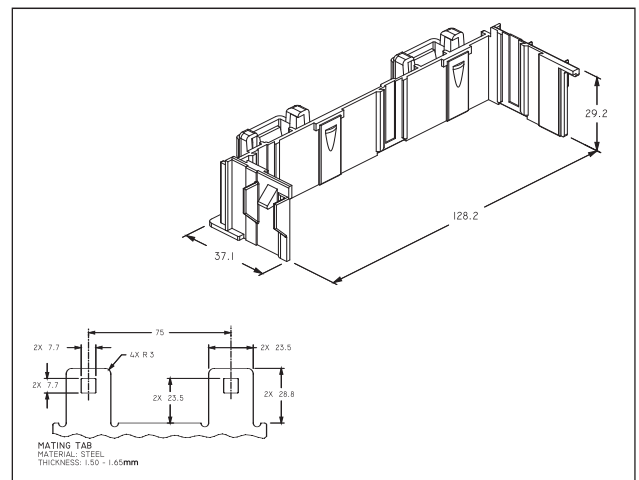


Part Number: E-1868 - Single Module Bracket

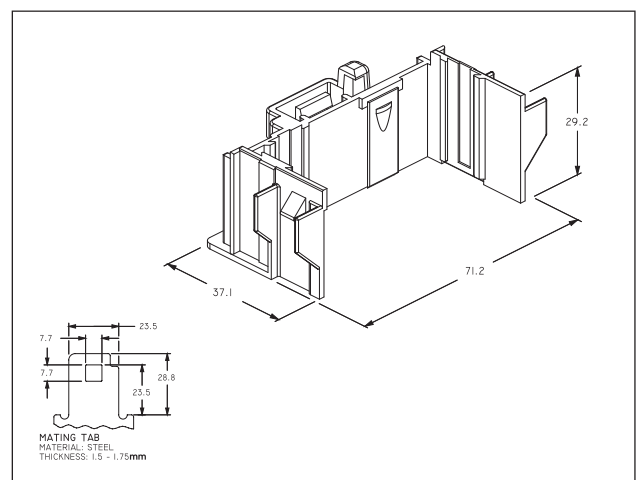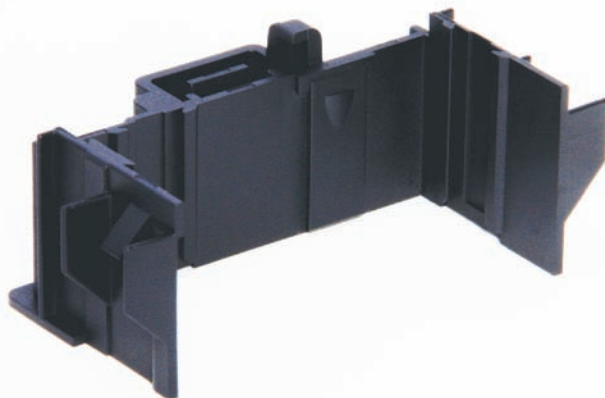

Part Number: E-1970 - Two Module Side-by-Side Bracket

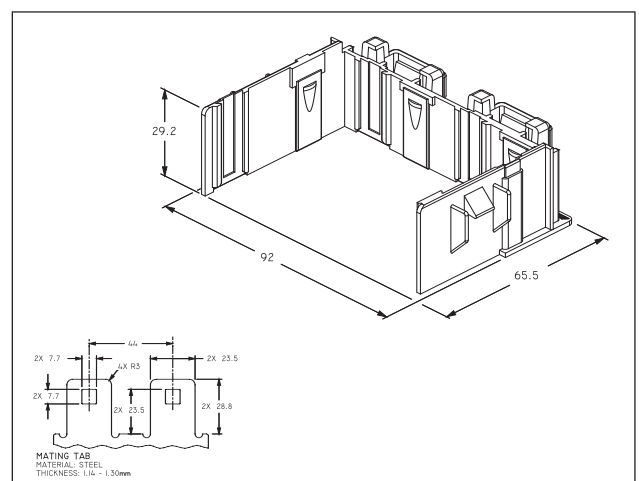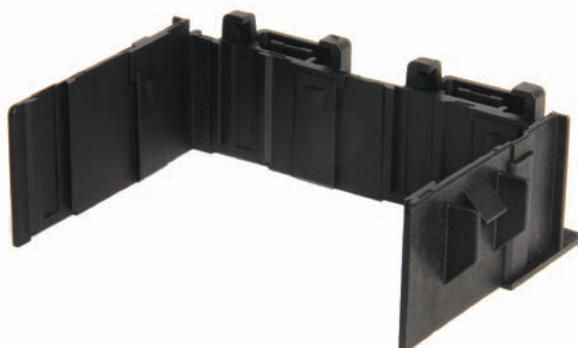


Part Number: E-2251 - Left End Braacket

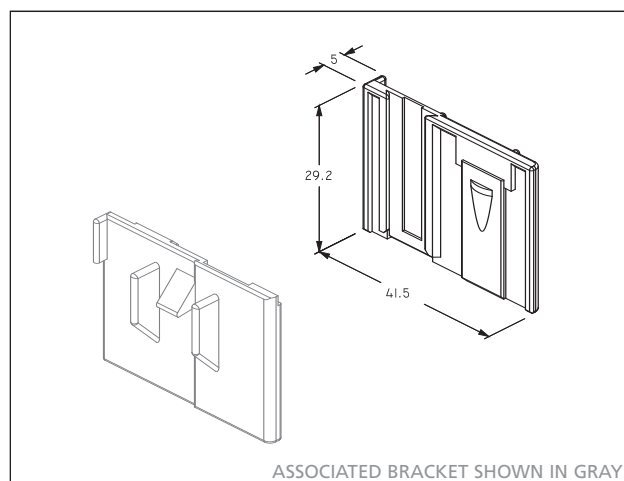


ASSOCIATED BRACKET SHOWN IN GRAY

Part Number: E-2252 - Right End Bracket

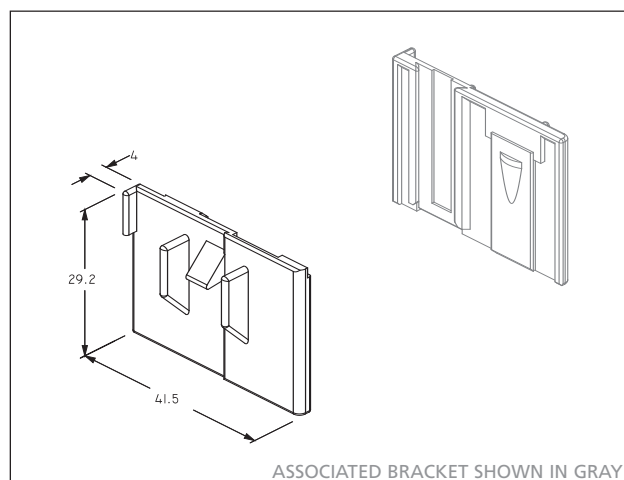



ASSOCIATED BRACKET SHOWN IN GRAY

Part Number: E-3325 - Right End Bracket

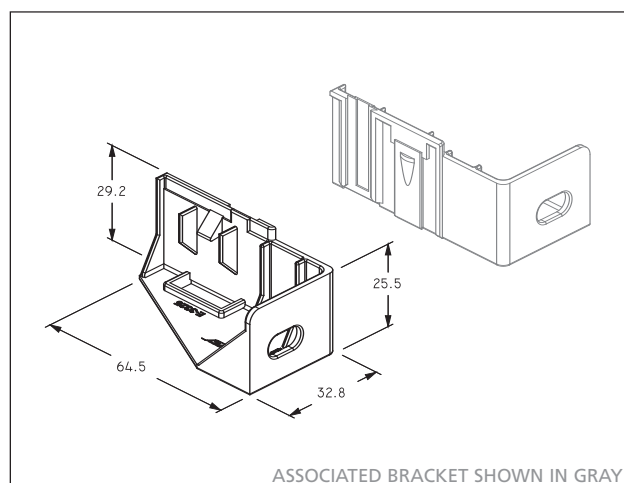


ASSOCIATED BRACKET SHOWN IN GRAY



Part Number: E-3326 - Left End Bracket

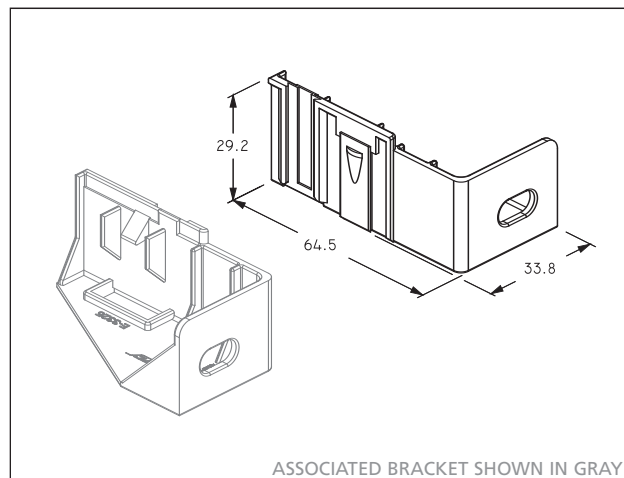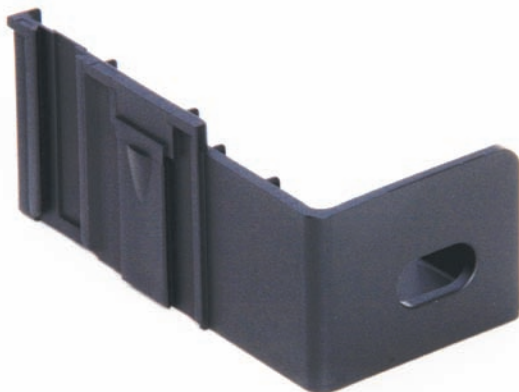



Part Number: E-4324 - Single Fuse Bracket

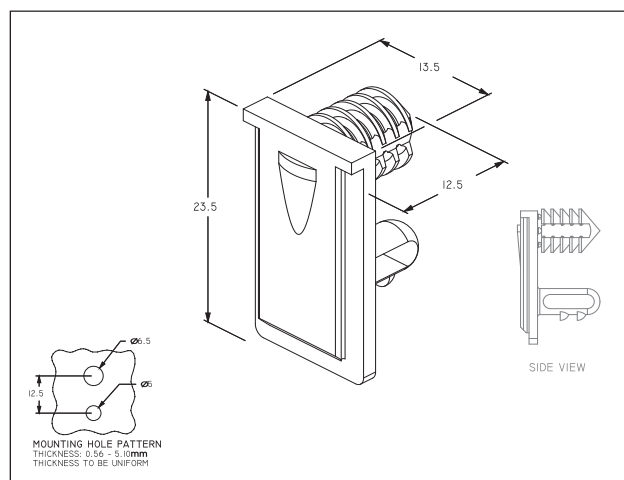



Part Number: E-4679 - Bottom Cover Attachment Bracket

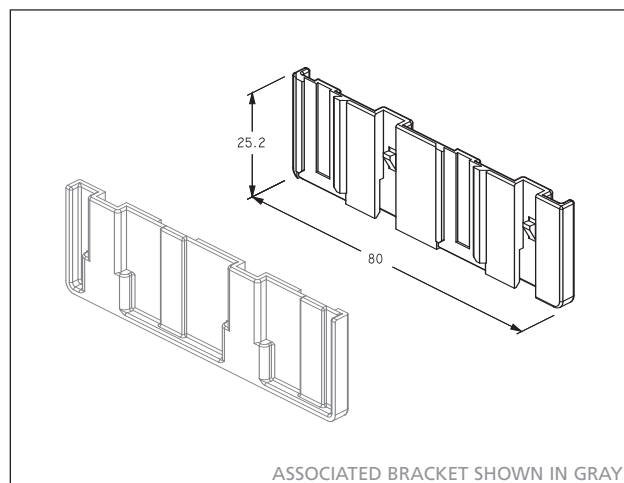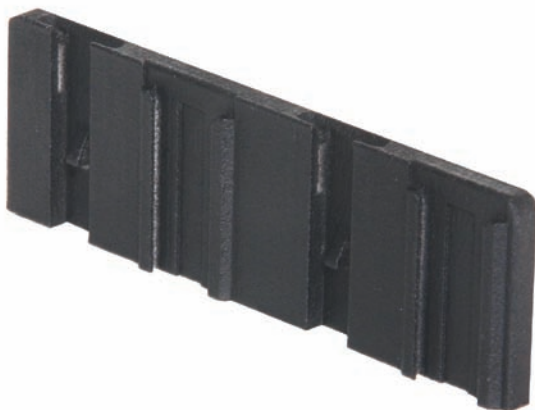


Part Number: E-4680 - Bottom Cover Attachment Bracket

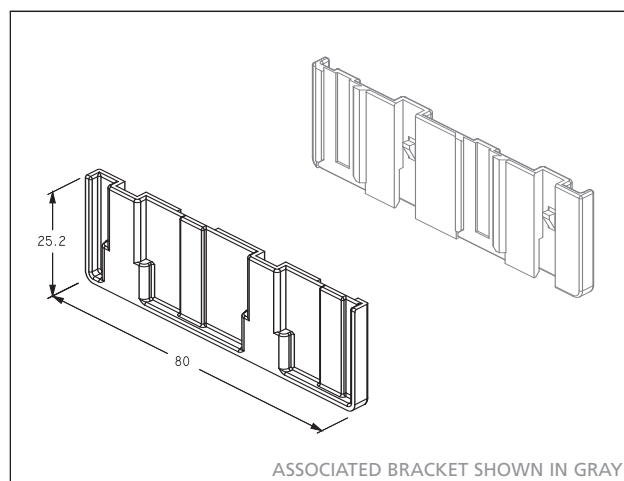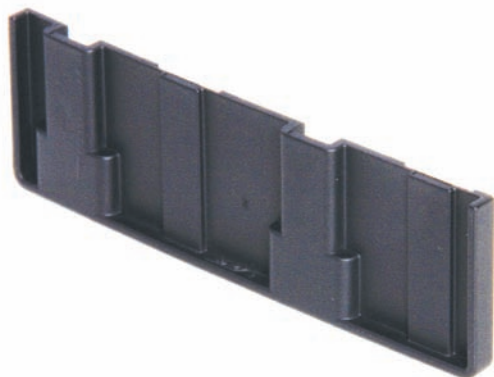



Part Number: E-5014 - Two Module Side Bracket

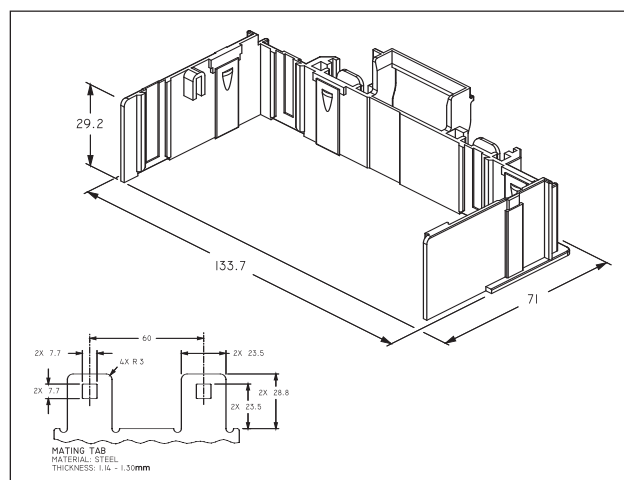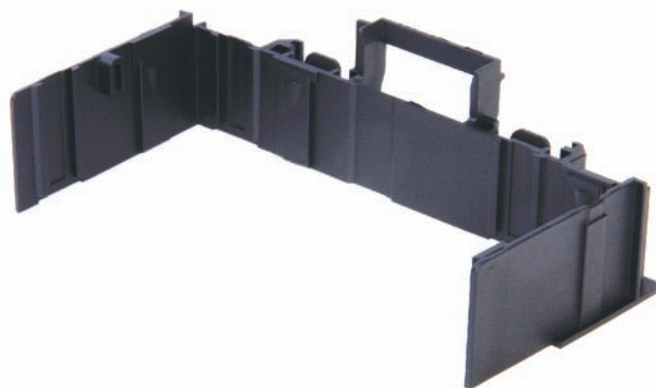


Part Number: E-5015 - Bracket

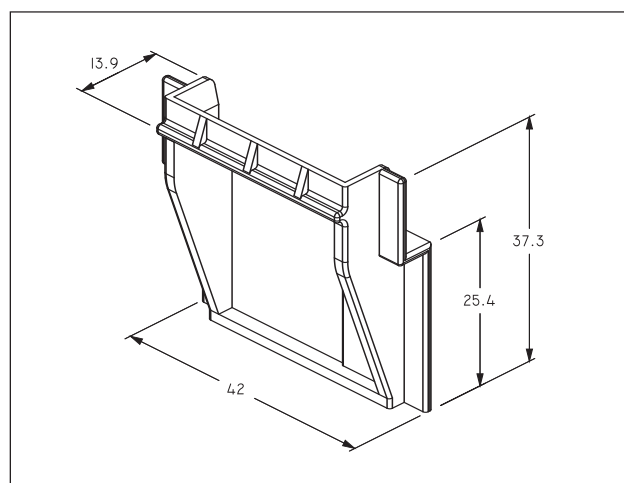


Part Number: E-5749 - Single Module Snap-on Bracket - 28mm

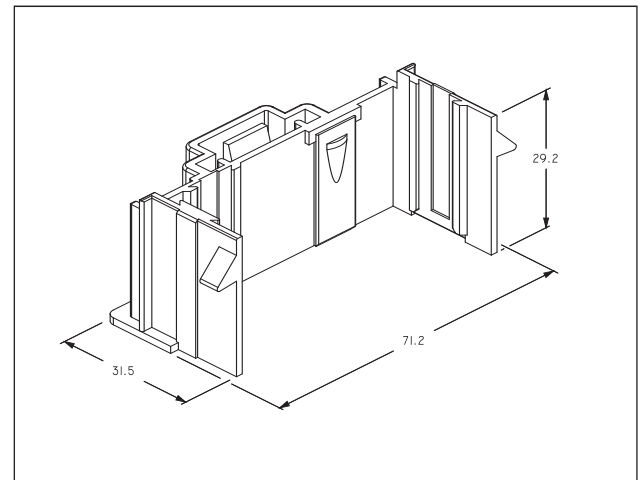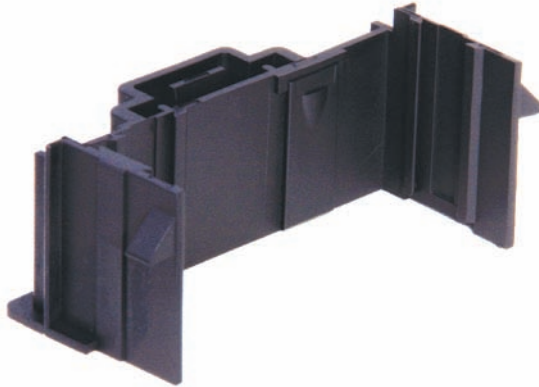


Part Number: E-5750 - Left End Bracket

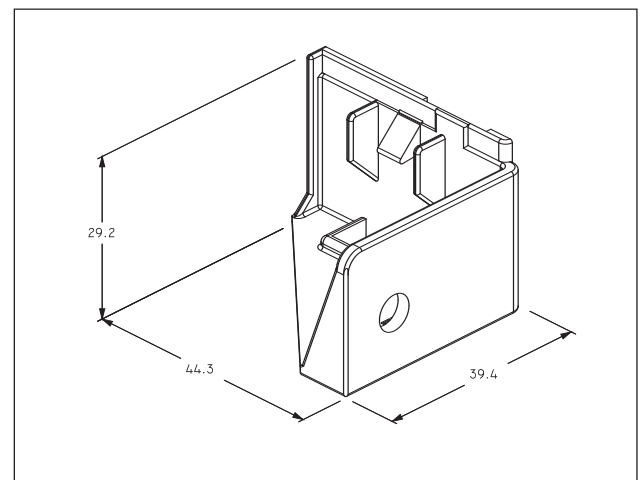


Part Number: E-5911 - Left Side Bracket

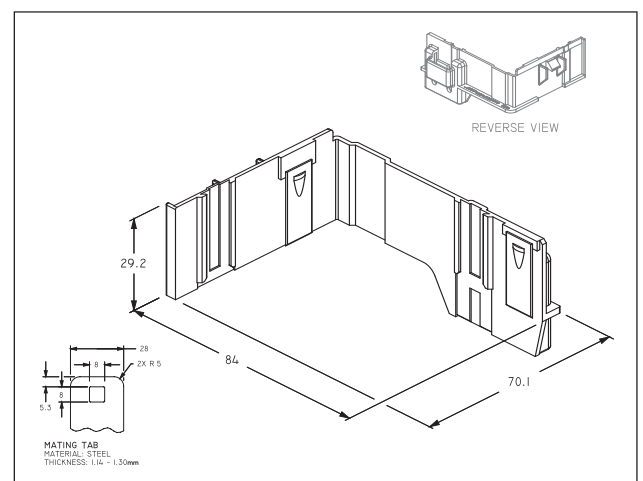


Part Number: E-5912 - Right Side Bracket

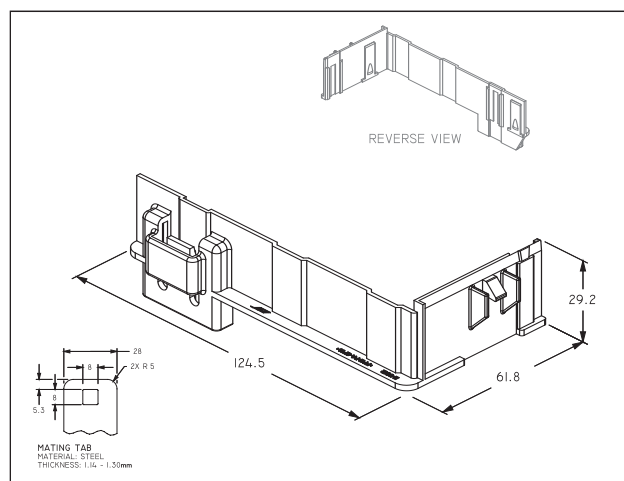



Part Number: E-5920 - Right Side Bracket

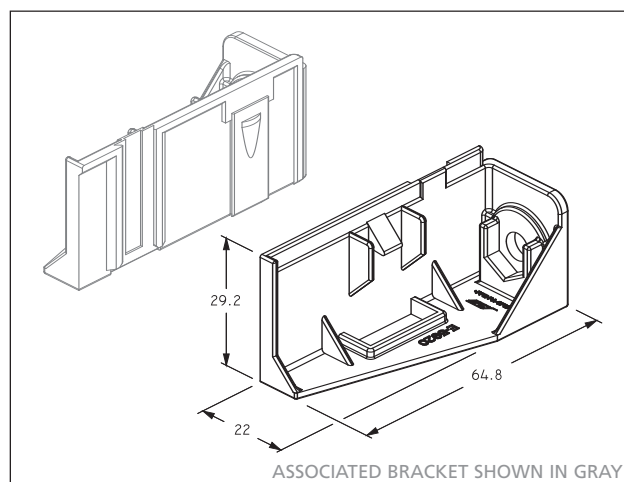



Part Number: E-5921 - Left Side Bracket

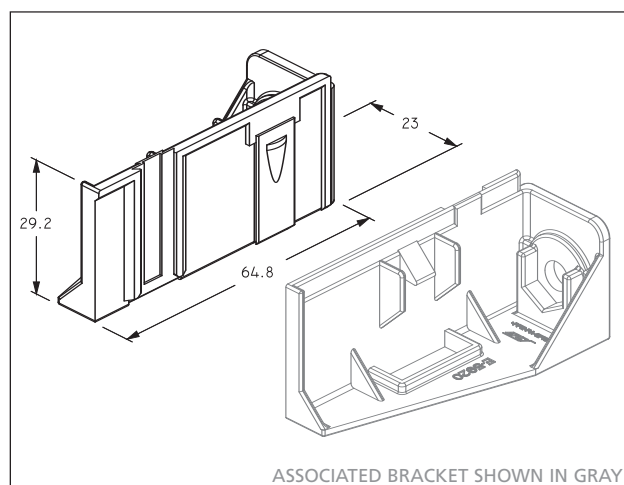



Part Number: E-5923 - Two Module Side-by-Side Bracket

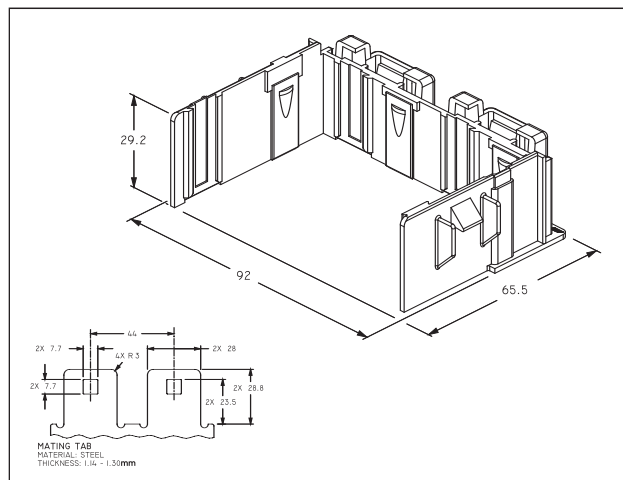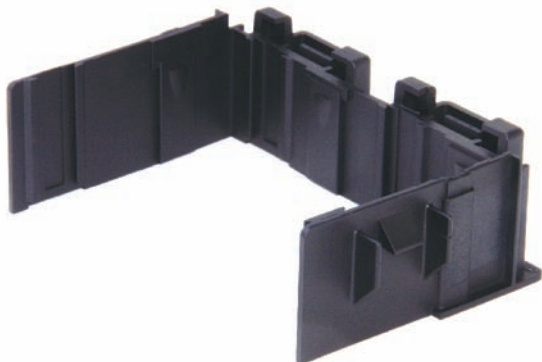



Part Number: E-6017 - Two Module Side Bracket

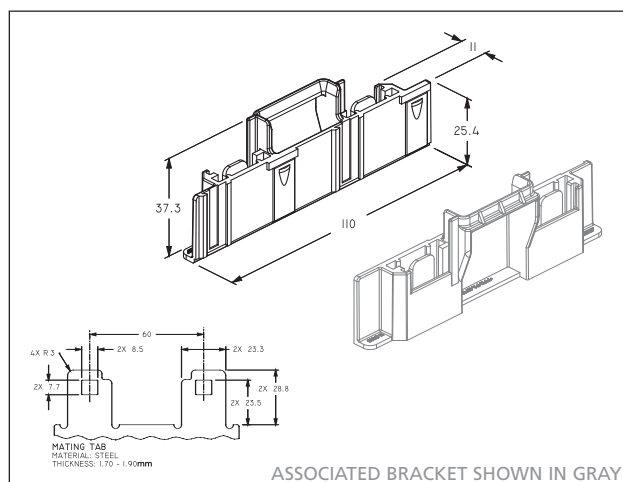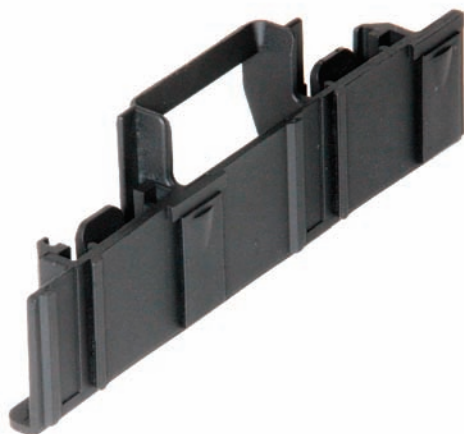



Part Number: E-6018 - Two Module Side Bracket

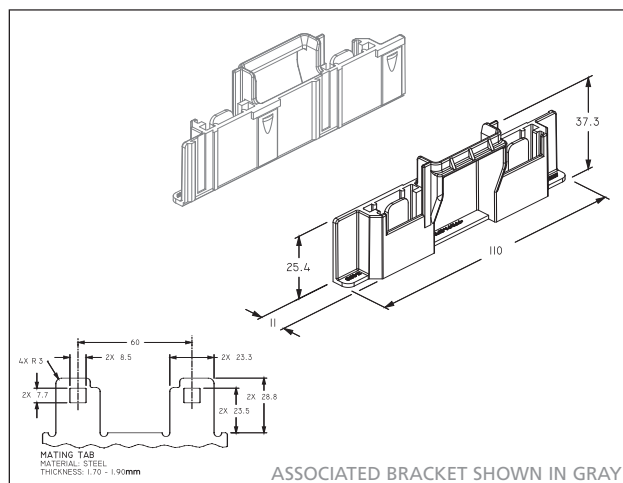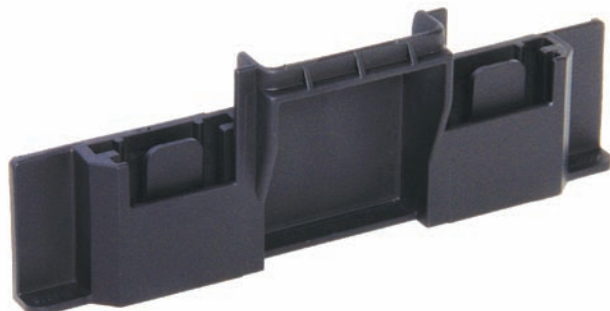



Part Number: E-6019-001 - M6 Power Feed Left Side Bracket

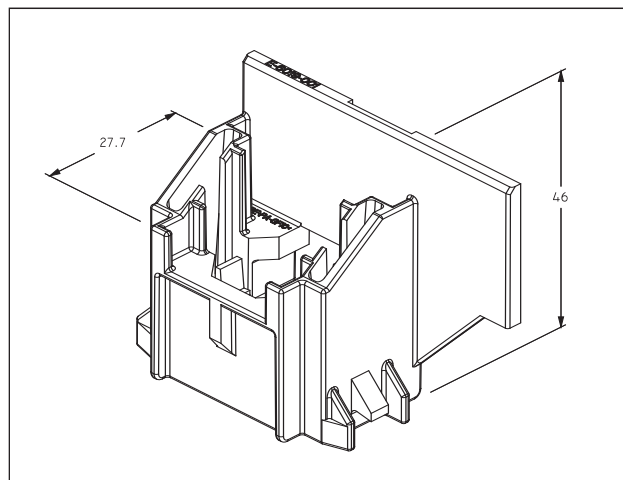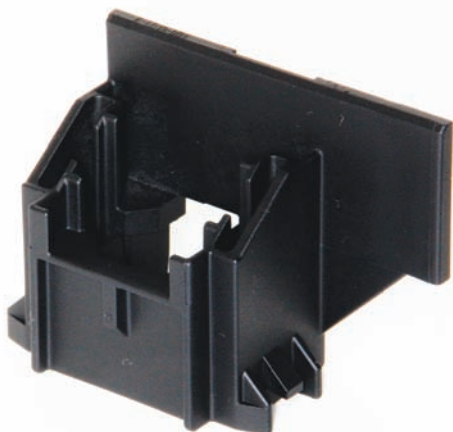



Part Number: E-6019-002 - M6 Power Feed Right Side Bracket

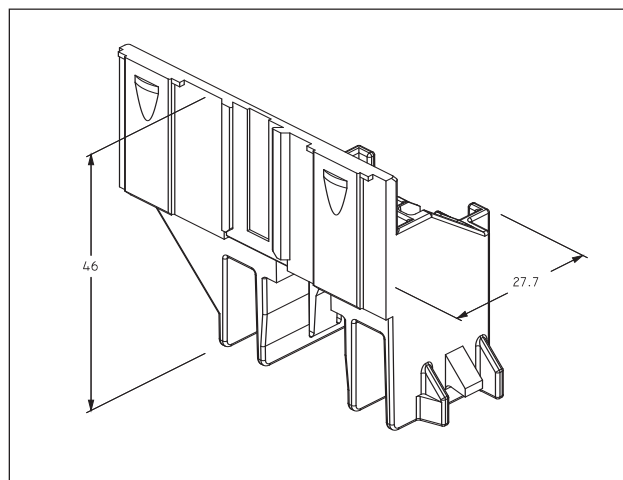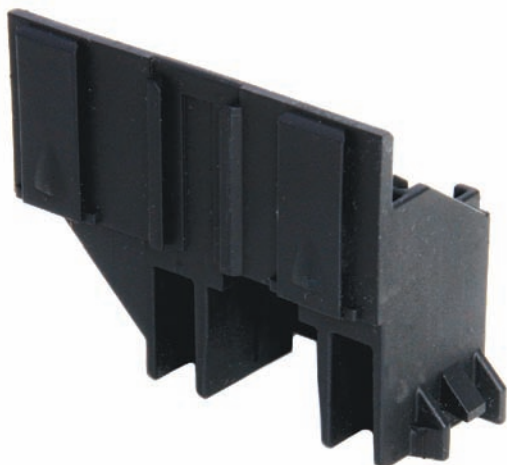


Part Number: E-6042 - Right Side Bracket

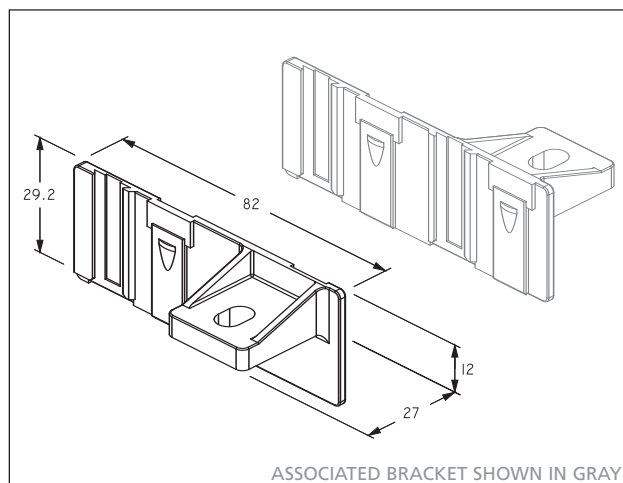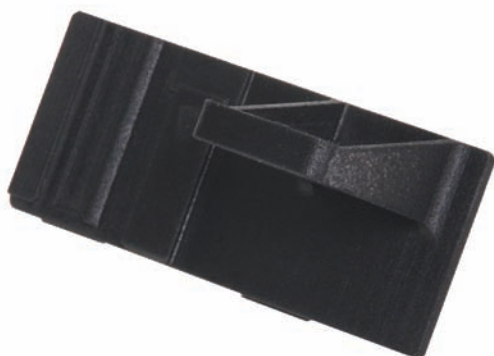


Part Number: E-6043 - Left Side Bracket

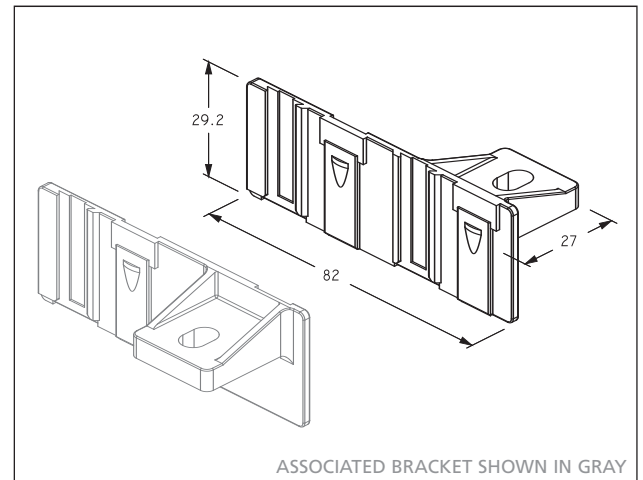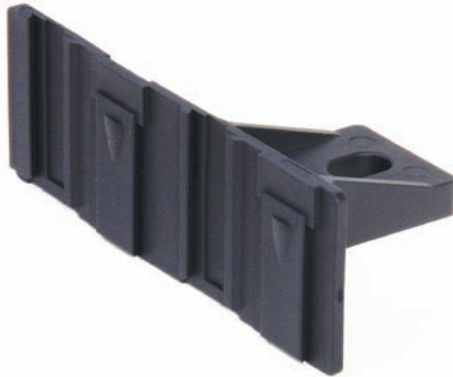


Part Number: E-6064 - Right Side Bracket

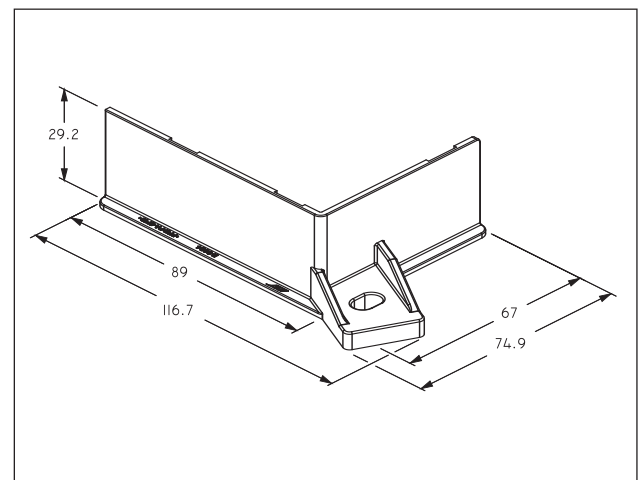


Part Number: E-6065 - Left Side Bracket

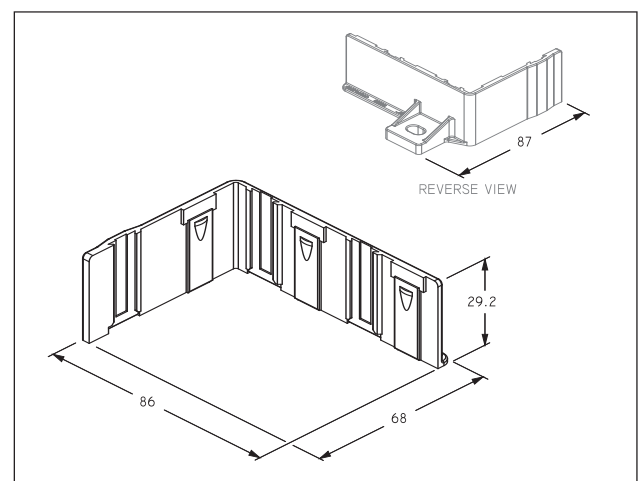


Part Number: E-6066 - Right Side Bracket

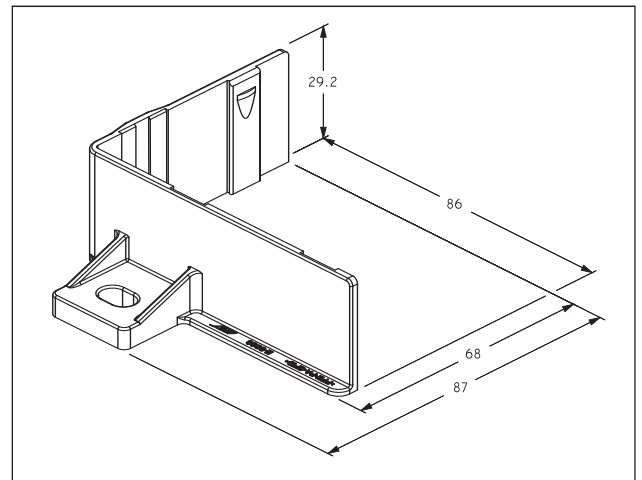


Part Number: E-6067 - Left Side Bracket

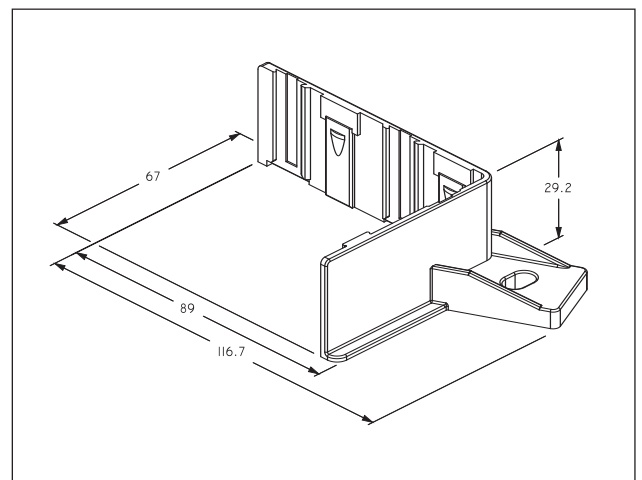



Part Number: E-6077 - Retaining Bracket

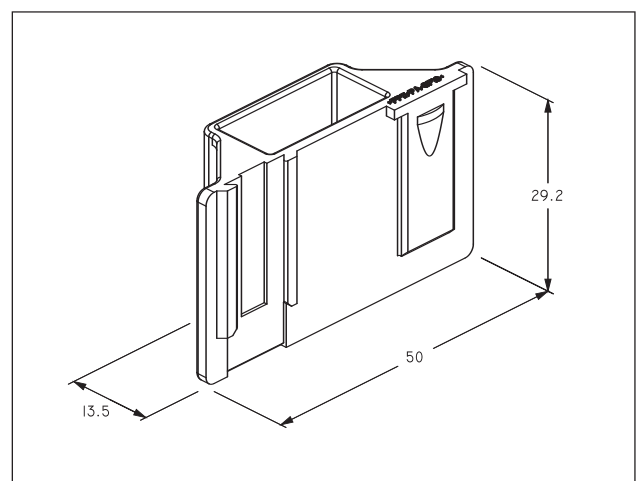


Part Number: E-6127 - Retaining Bracket

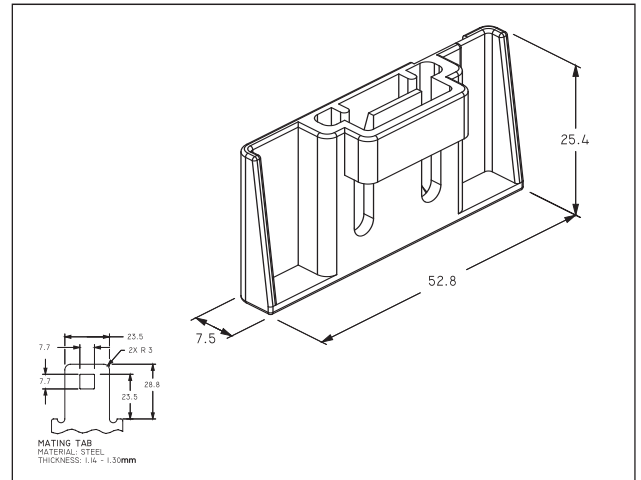


Part Number: E-6213 - Three Module Bracket

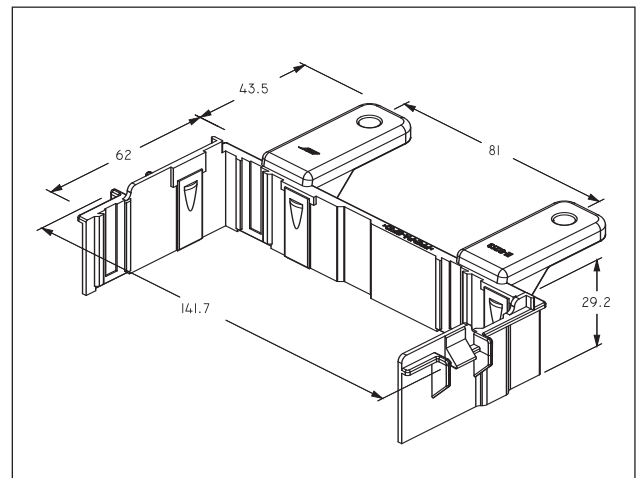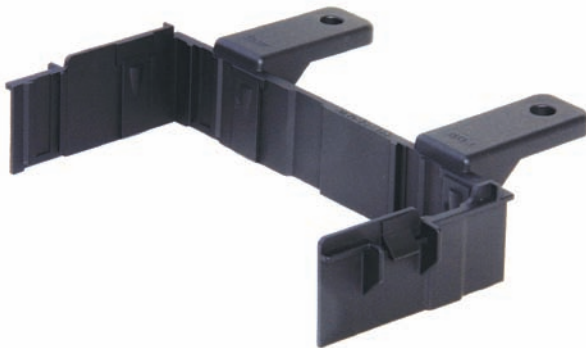


TOP COVERS SECTION

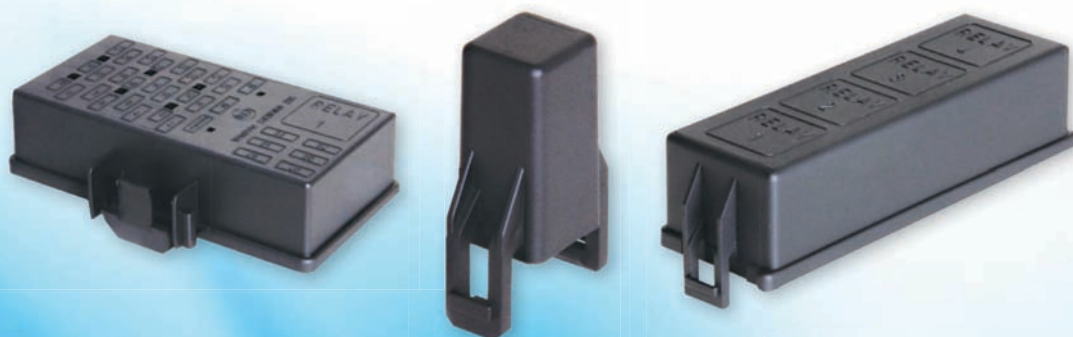


Part Number: E-0384 - Two Module End-to-End Top Cover

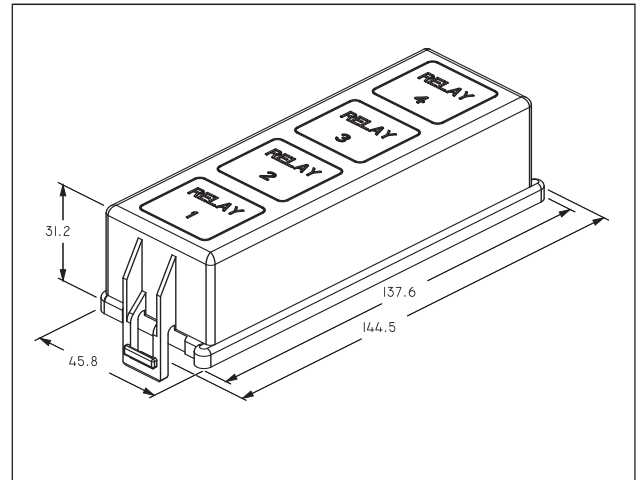


Part Number: E-0434 - Single Module Top Cover

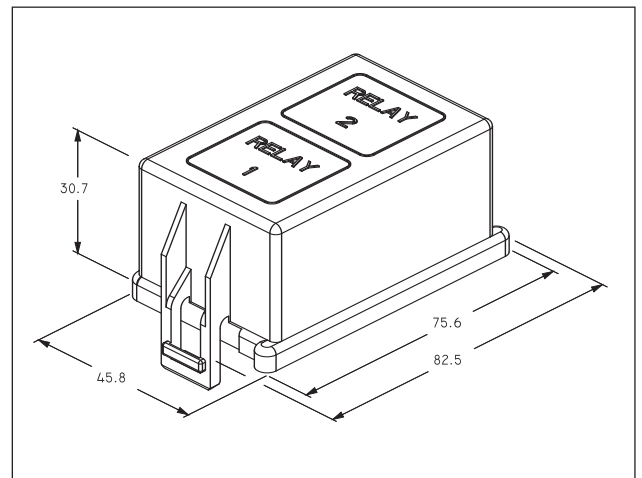


Part Number: E-0447 - Four Module Top Cover

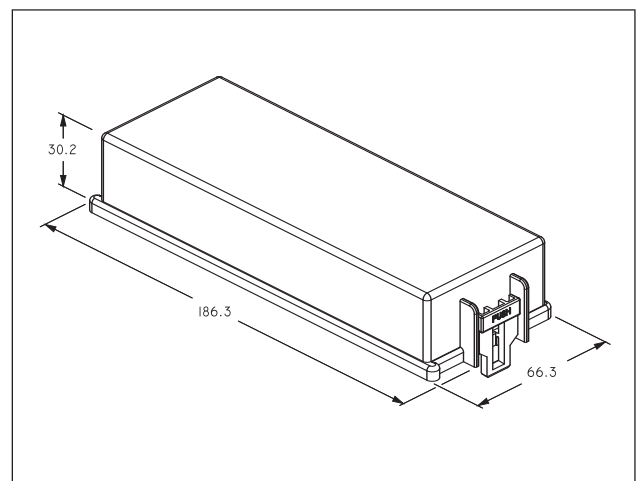



Part Number: E-0450 - Three Module Top Cover

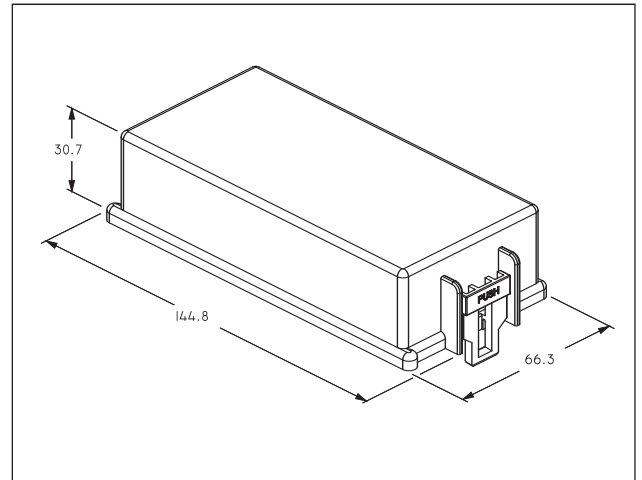


Part Number: E-0775 - Single Module Flasher Top Cover

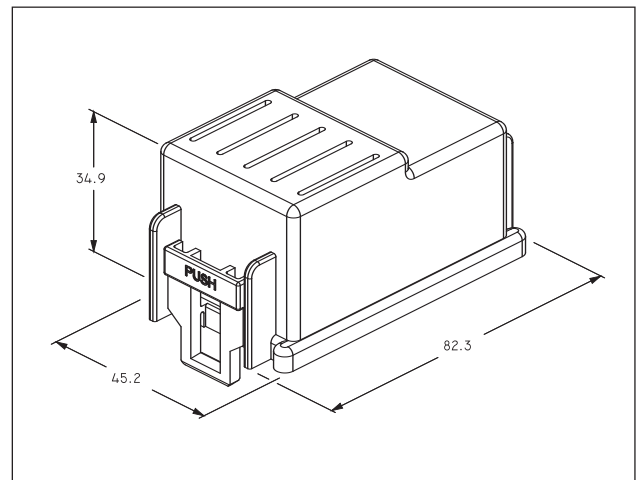


Part Number: E-0849 - Two Module Top Cover

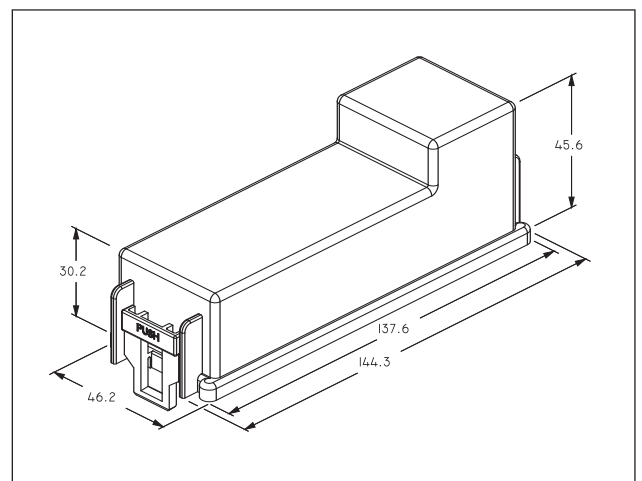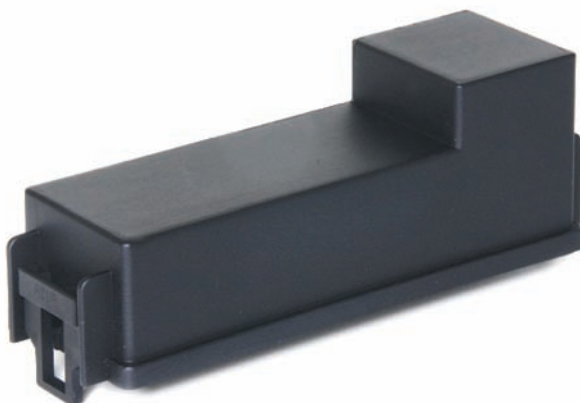


Part Number: E-1014 - Half Module Top Cover

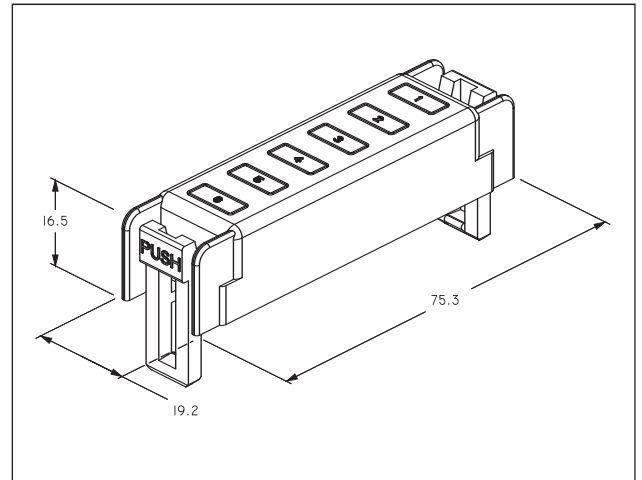


Part Number: E-1547 - 27 Minifuse and ISO Relay Top Cover

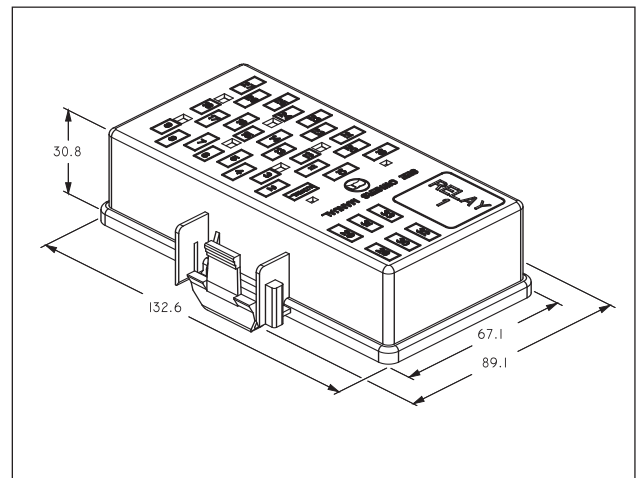


Part Number: E-1585 - Single Module High Current Top Cover

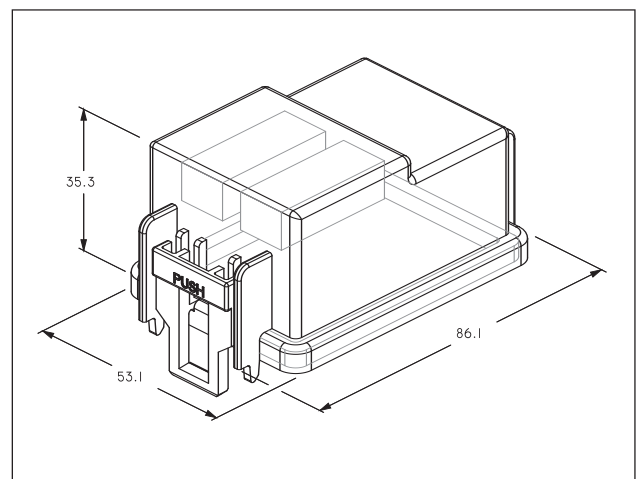


Part Number: E-1590 - Half Module Top Cover

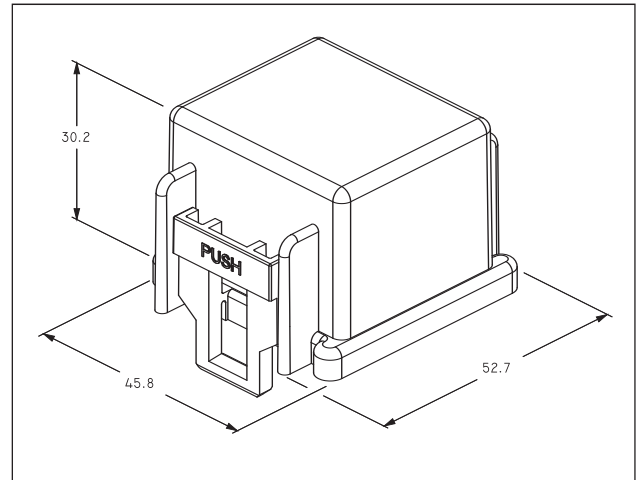


Part Number: E-1807 - Two Module High Current Top Cover

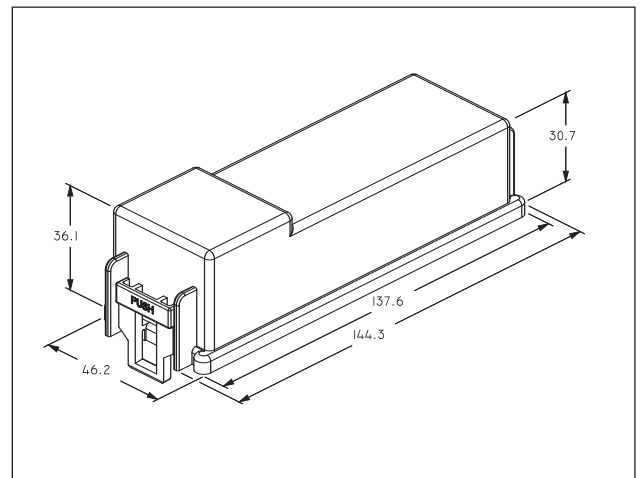


Part Number: E-1825 - Two Module End-to-End Top Cover

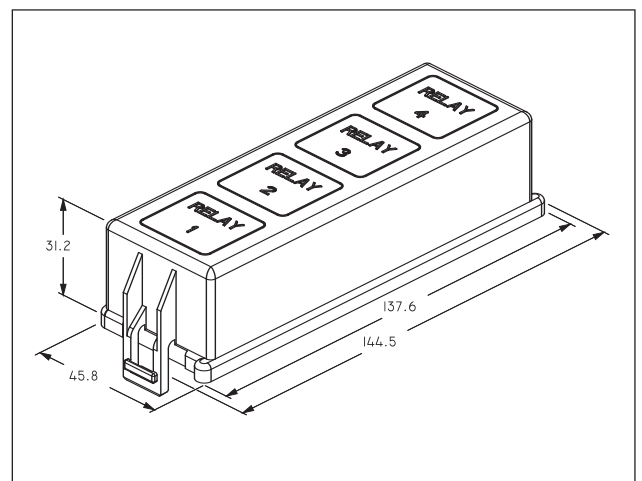


Part Number: E-1826 - Single Module Top Cover

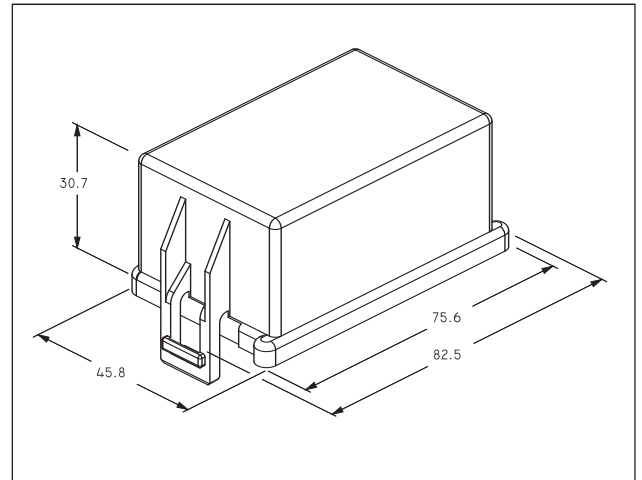


Part Number: E-1827 - Two Module Top Cover

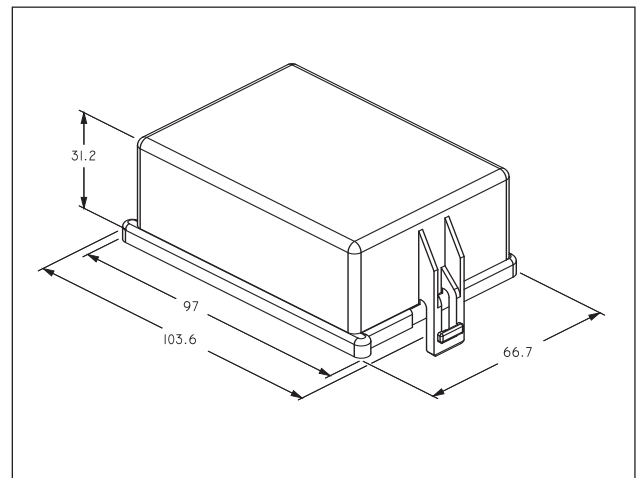


Part Number: E-1935 - Single Module High Current Top Cover

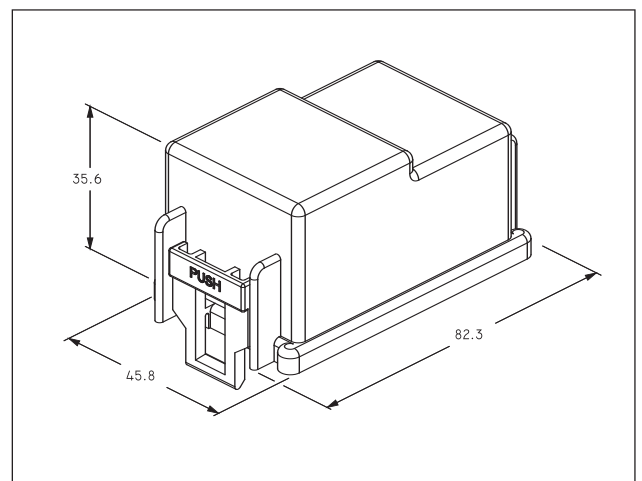


Part Number: E-1969 - Two Module Side-by-Side Top Cover

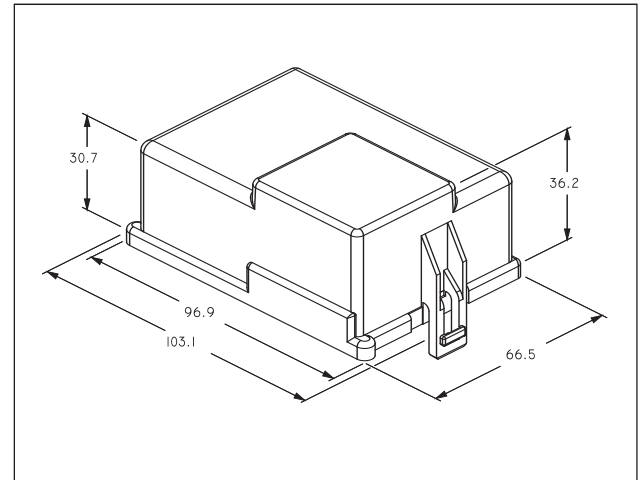


Part Number: E-2144 - Electronic Flasher and Half ISO Top Cover

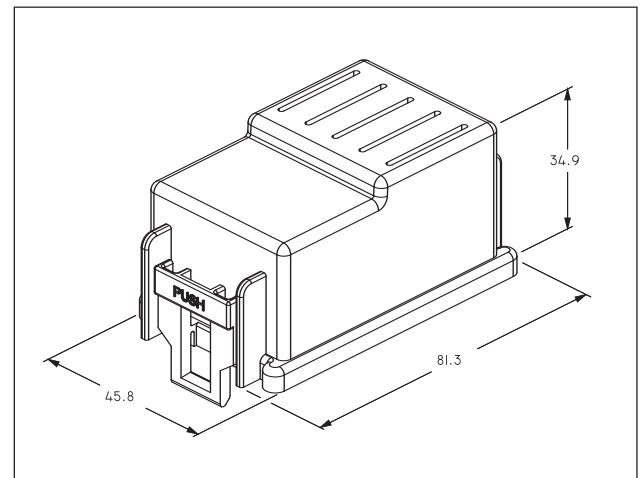


Part Number: E-4323 - Single J-Fuse Top Cover

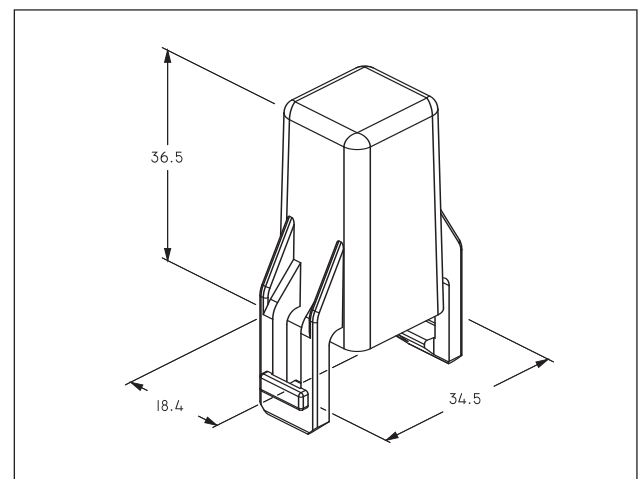


Part Number: E-5013 - 27 Minifuse and One Module Top Cover

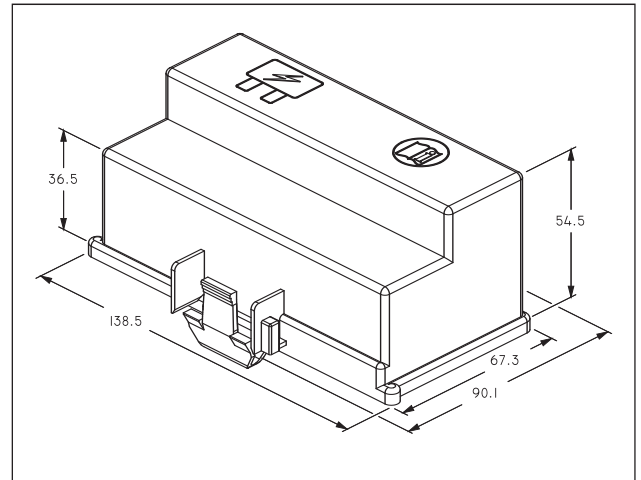


Part Number: E-5039 - Single Module Top Cover

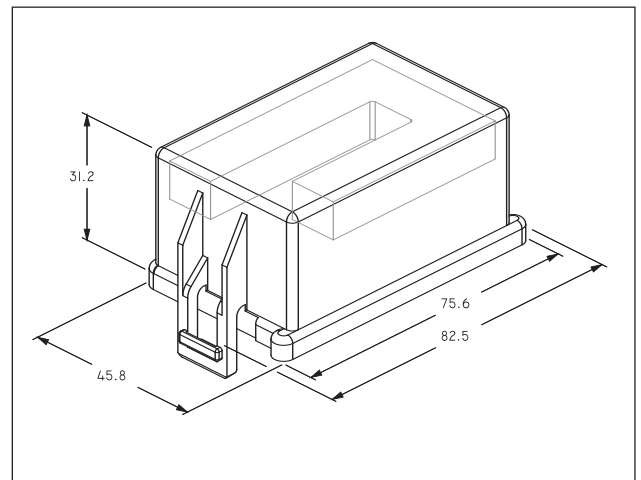


Part Number: E-5078 - 27 Minifuse and One Module Top Cover

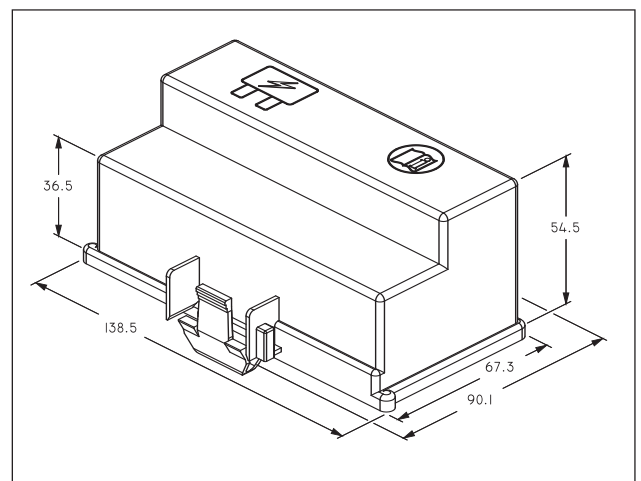



Part Number: E-5112 - Two Module Top Cover

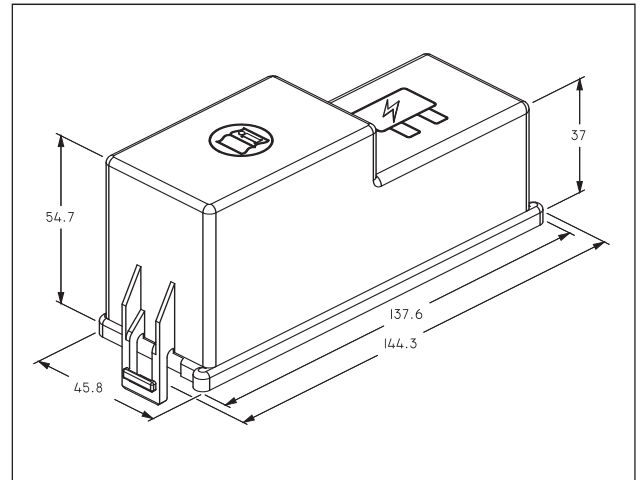


Part Number: E-5443 - Two Module Flasher Top Cover

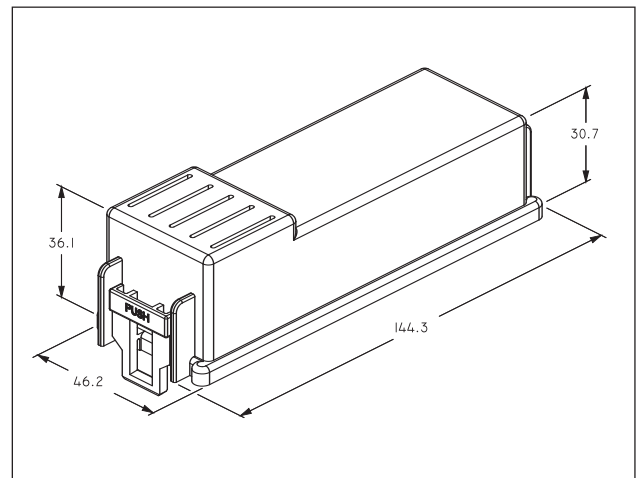


Part Number: E-5504 - Two Module Top Cover

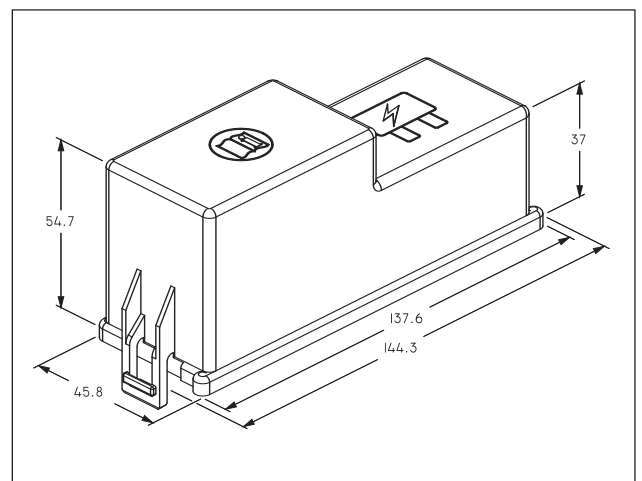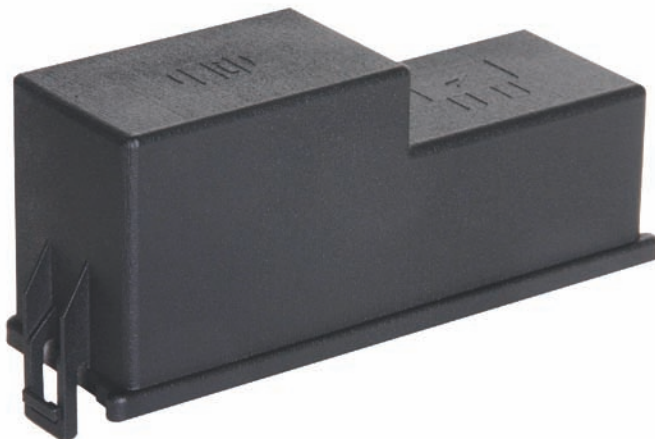


Part Number: E-5601 - 27 Minifuse and Maxifuse Top Cover

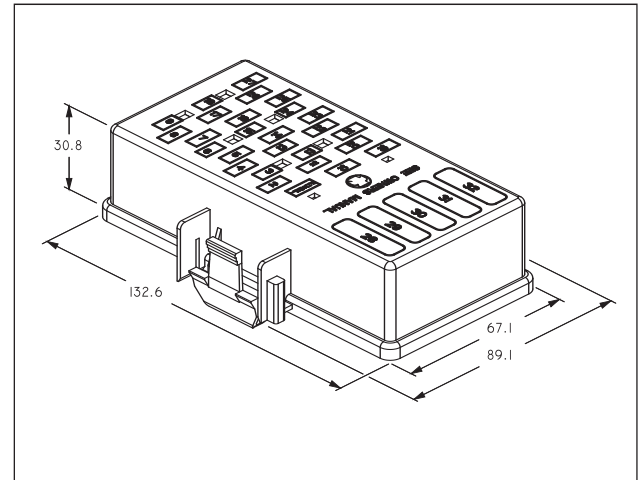


Part Number: E-5914 - Three Module Top Cover

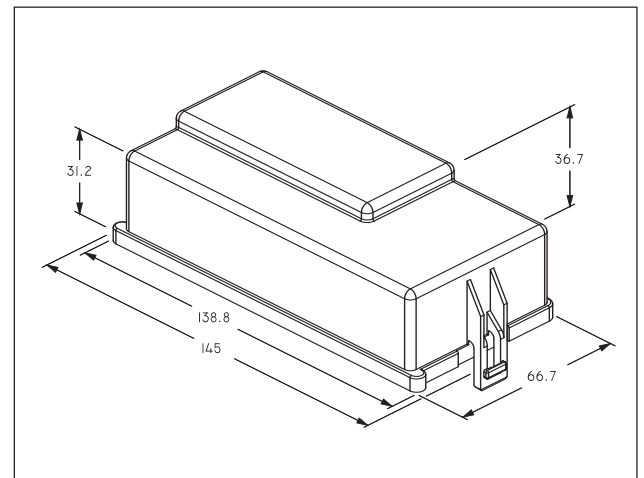


Part Number: E-5916 - Two Module Top Cover

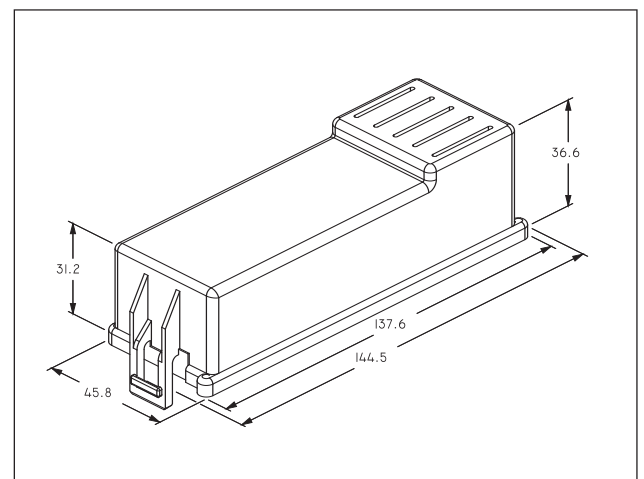


Part Number: E-5976 - Single Module High Current Top Cover

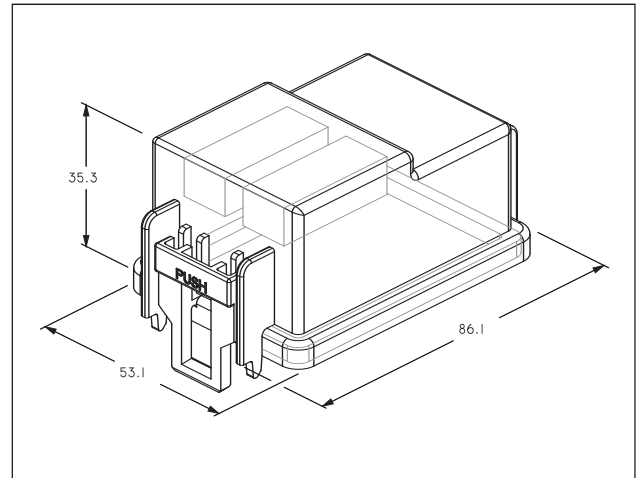


Part Number: E-5991 - Three Module Top Cover

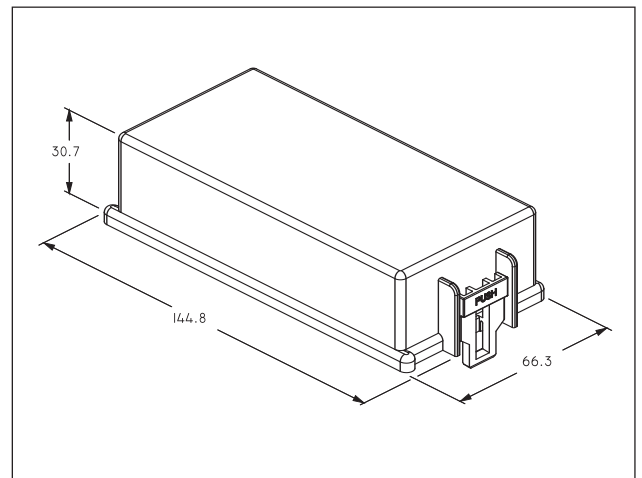


Part Number: E-6021-001 - Six Module Top Cover

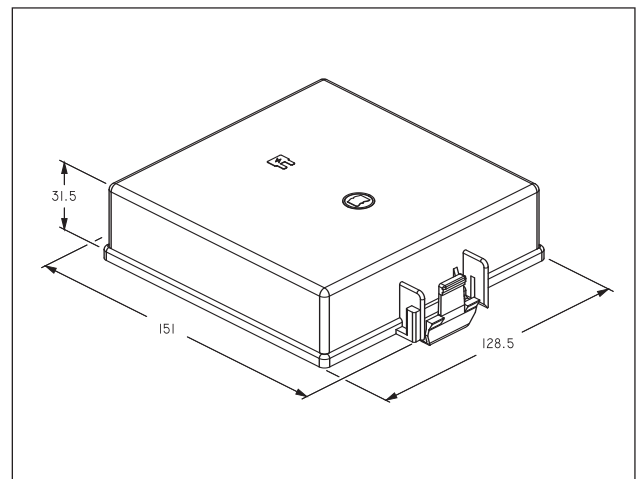


Part Number: E-6021-002 - Six Module Top Cover

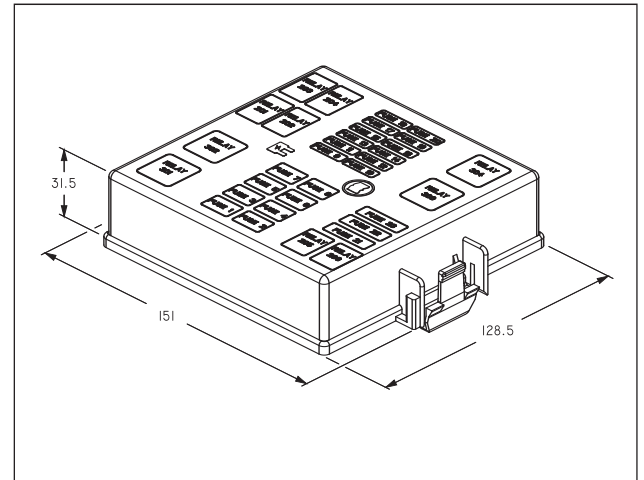

Part Number: E-6131 - Two Module Top Cover

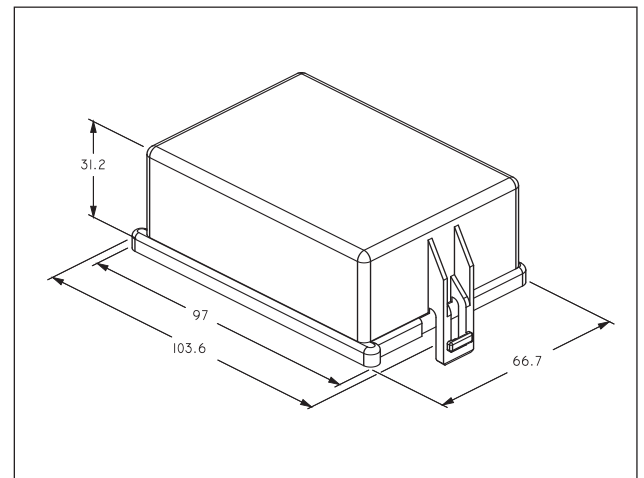


Part Number: R-2018-001 - M6 Power Feed Top Cover

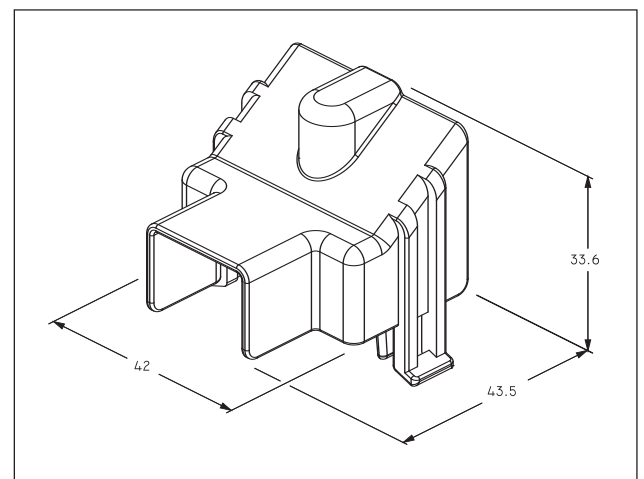


BOTTOM COVERS SECTION




Part Number: E-0385 - Two Module End-to-End Bottom Cover

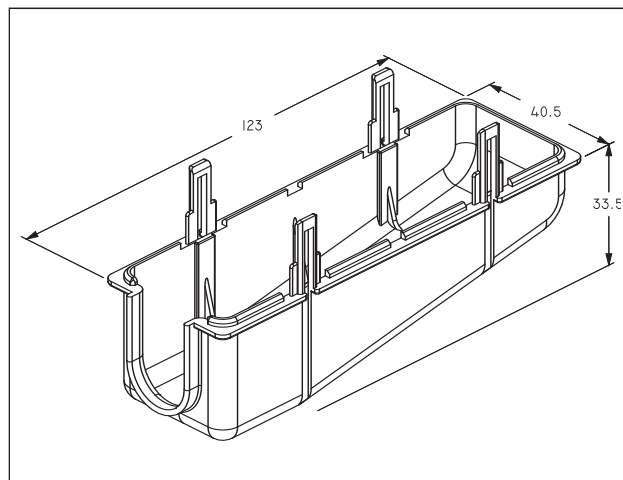



Part Number: E-0435 - Single Module Bottom Cover

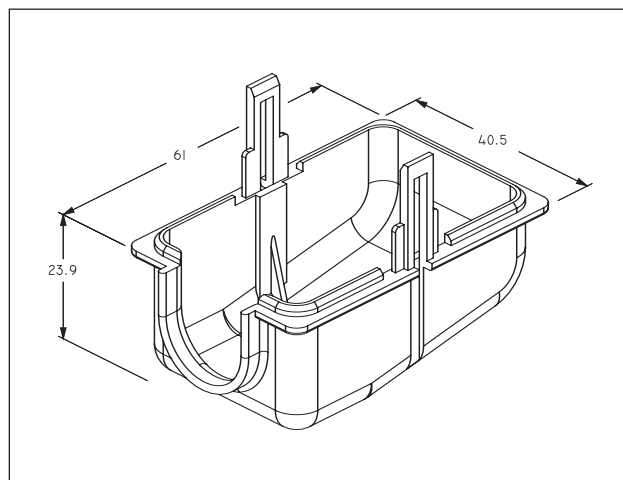


Part Number: E-0774 - Three Module Bottom Cover

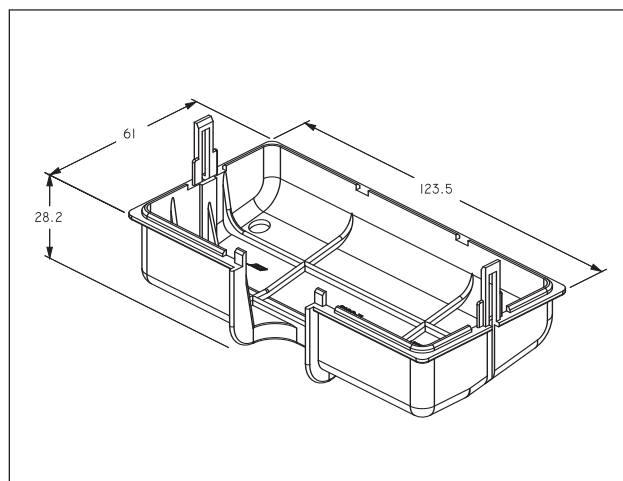


Part Number: E-0792 - Two Module Bottom Cover

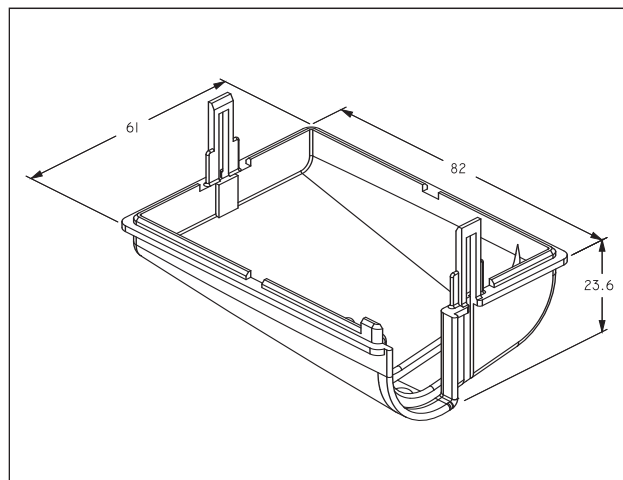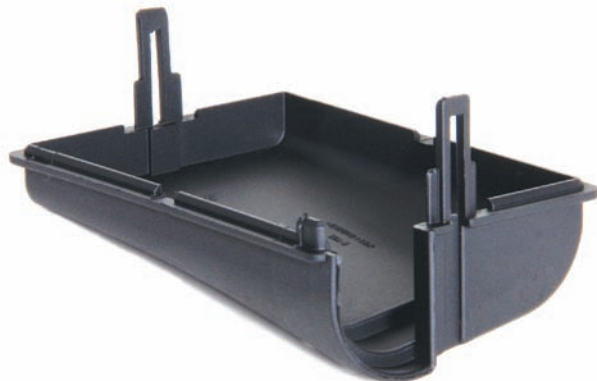


Part Number: E-1005 - Two Module End-to-End Bottom Cover

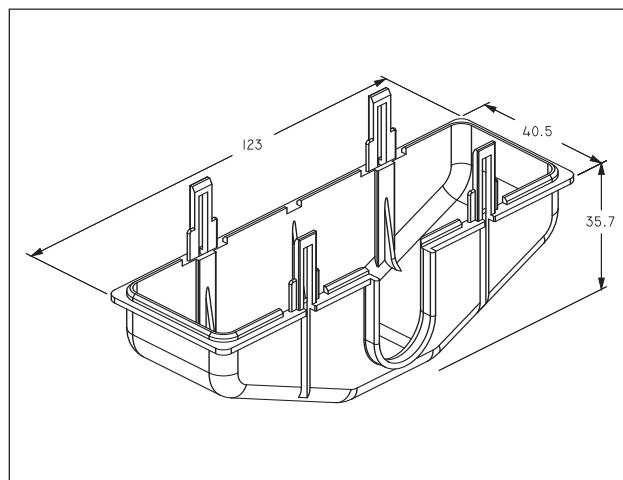



Part Number: E-1015 - Half Module Bottom Cover

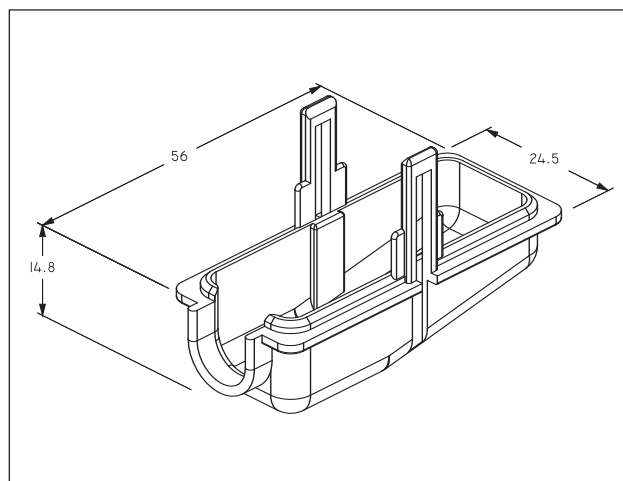


Part Number: E-1591 - Half Module Bottom Cover

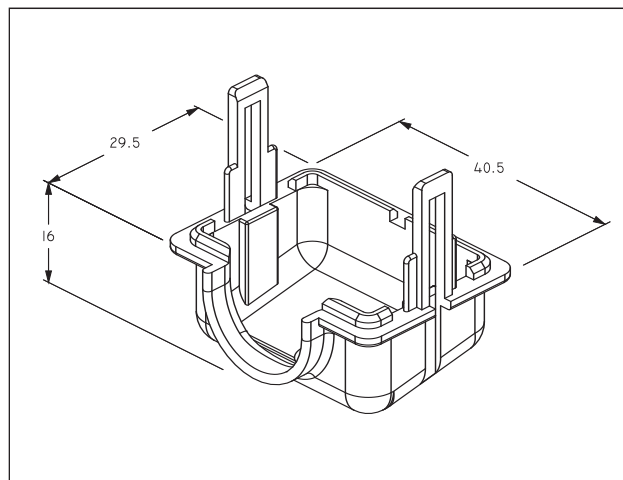


Part Number: E-1651 - Three Module Bottom Cover

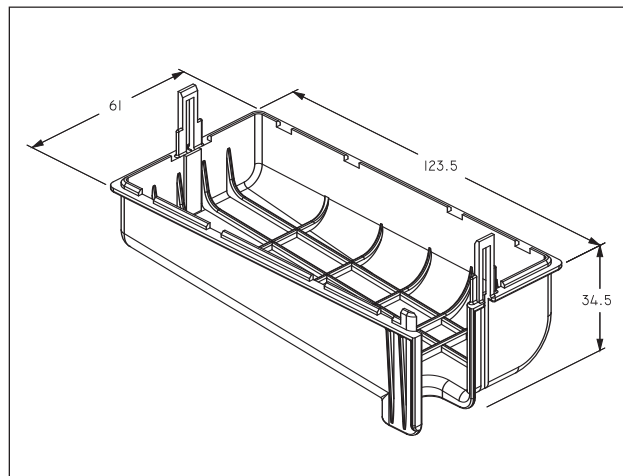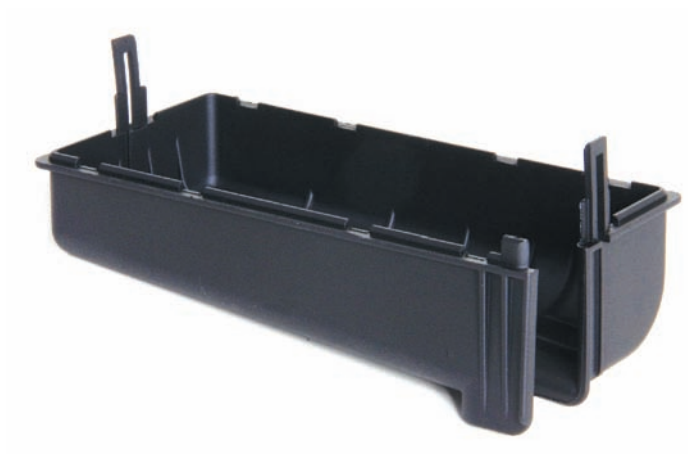


Part Number: E-4681 - Four Module Bottom Cover

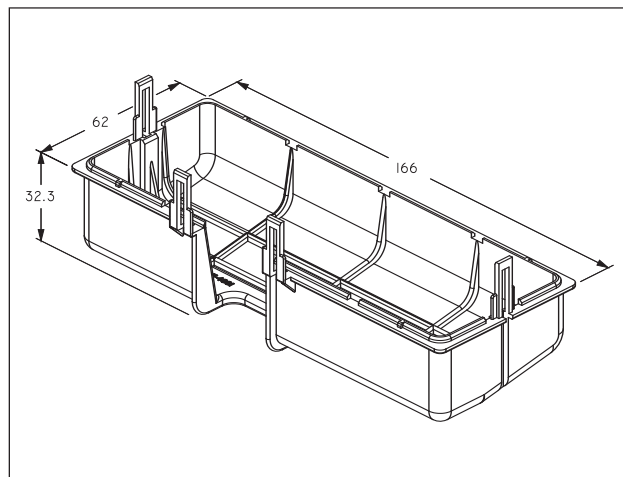



Part Number: E-5906 - Single Module Bottom Cover

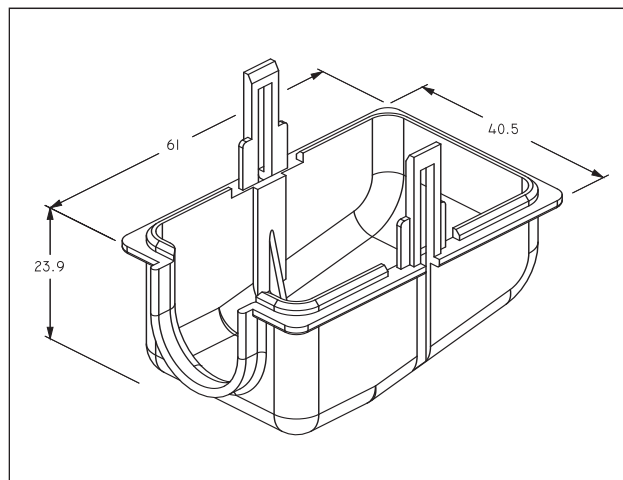


Part Number: E-5915 - Three Module Bottom Cover

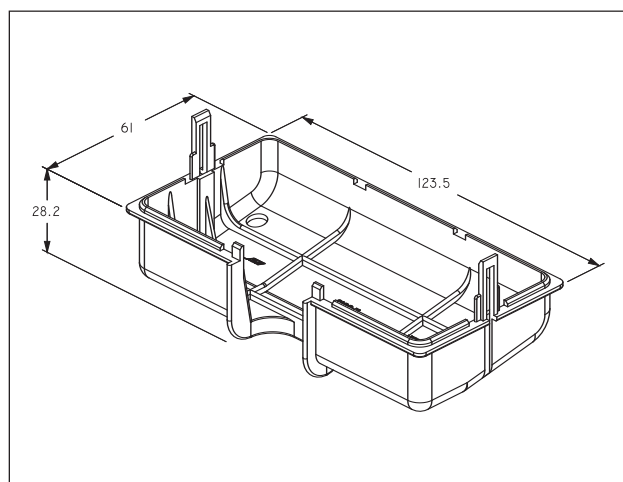


Part Number: E-6020 - BussBar J Case Bottom Cover

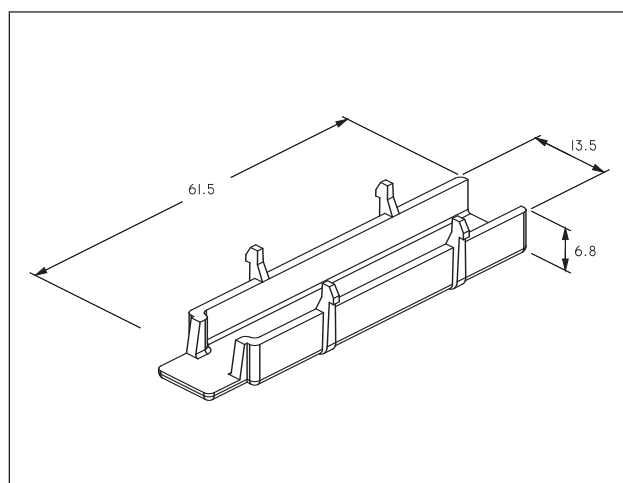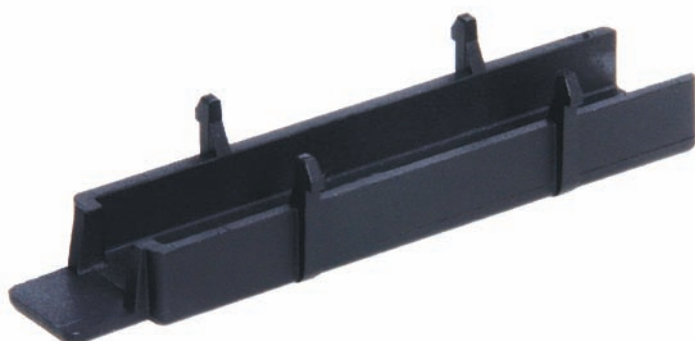


Part Number: E-6022 - Six Module Bottom Cover

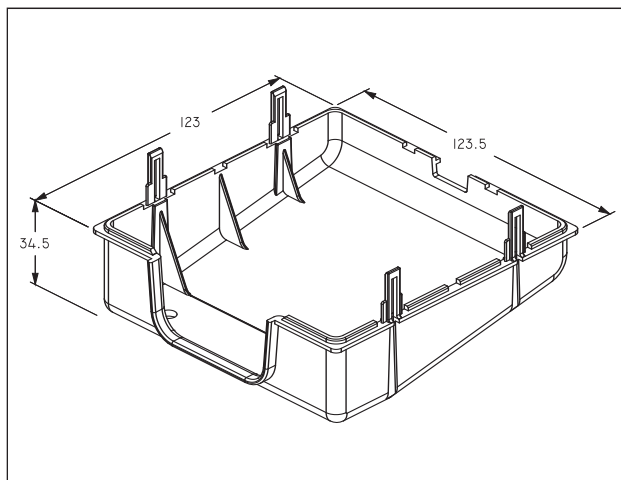



Part Number: E-6035 - Bottom Cover

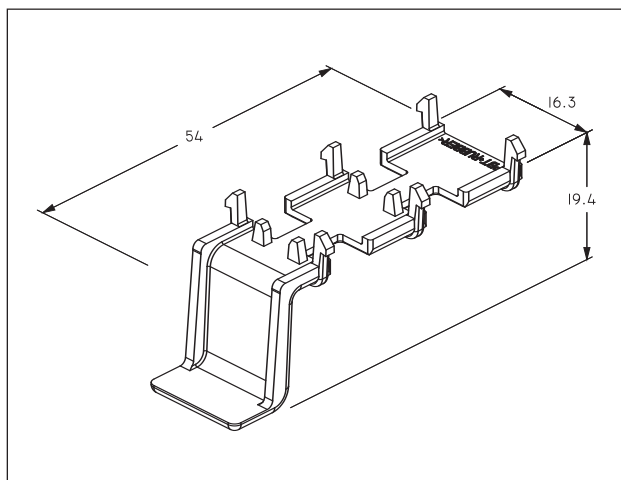


Part Number: E-6053 - Half Module Bottom Cover

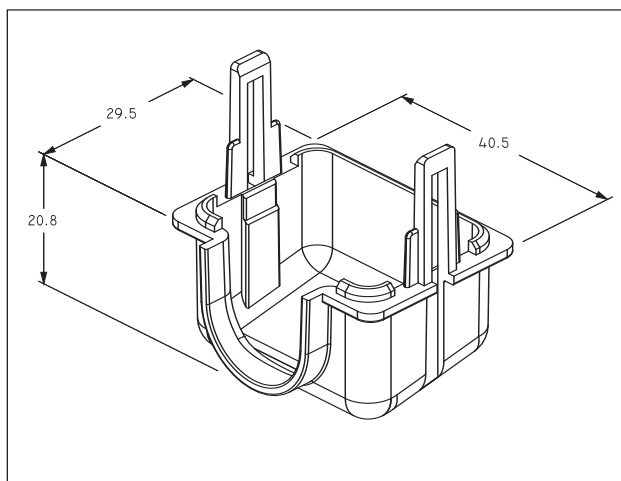



Part Number: E-6083 - BussBar Bottom Cover

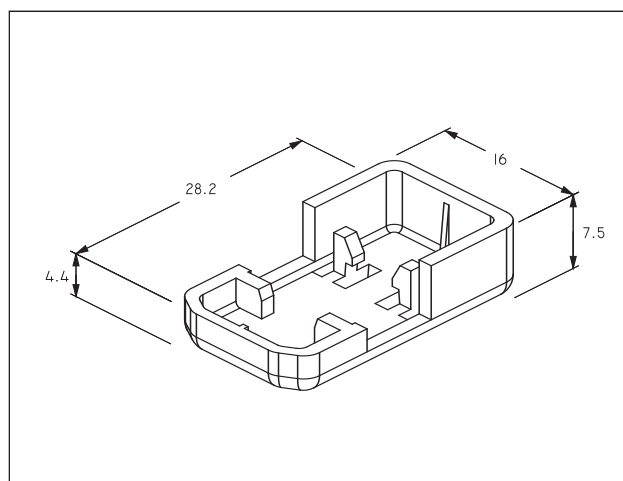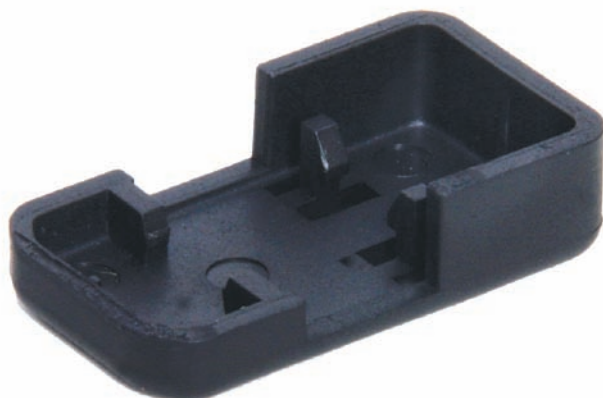



Part Number: E-6132 - Two Module Bottom Cover

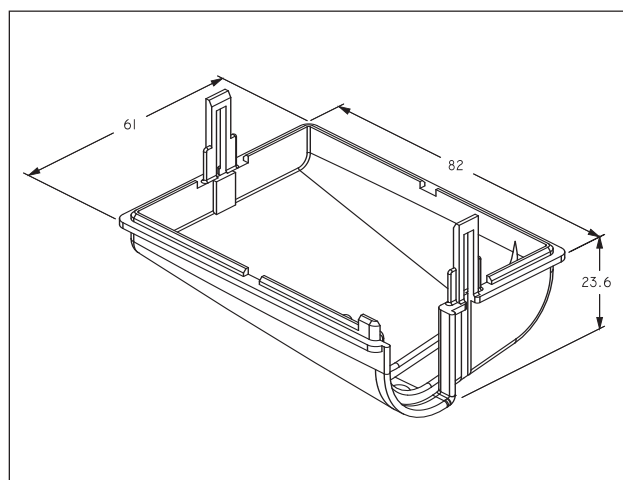


Part Number: R-62895-001 - BussBar Bottom Cover

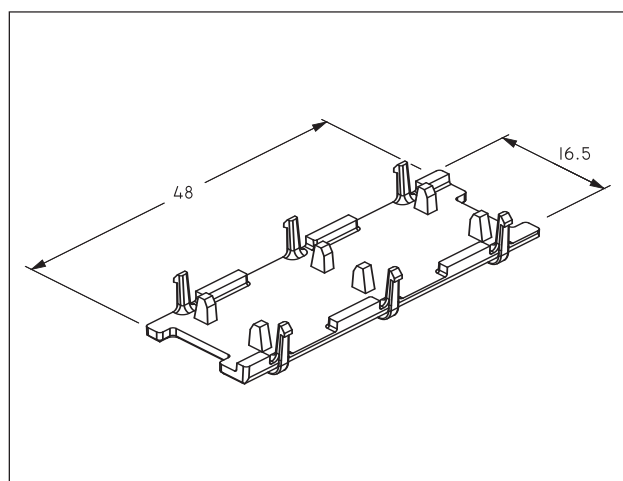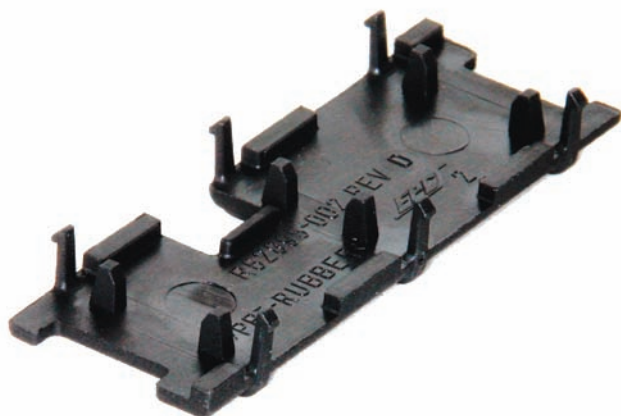

Part Number: R-62895-002 - BussBar Bottom Cover

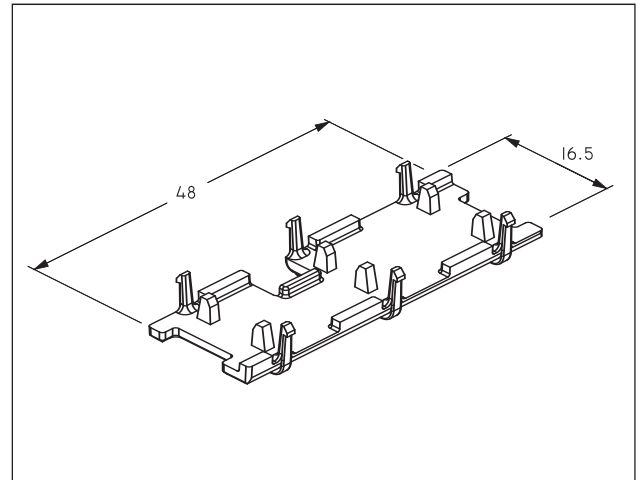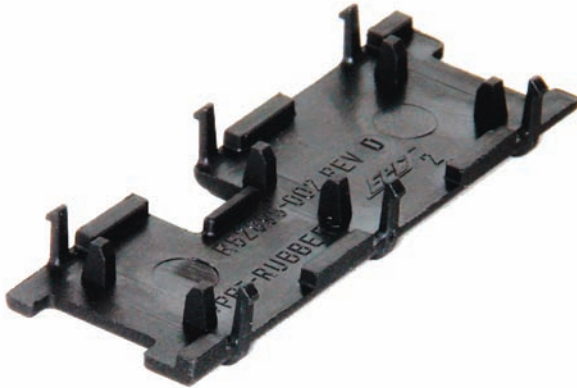


Part Number: R-63140-001 - Three Module Bottom Cover

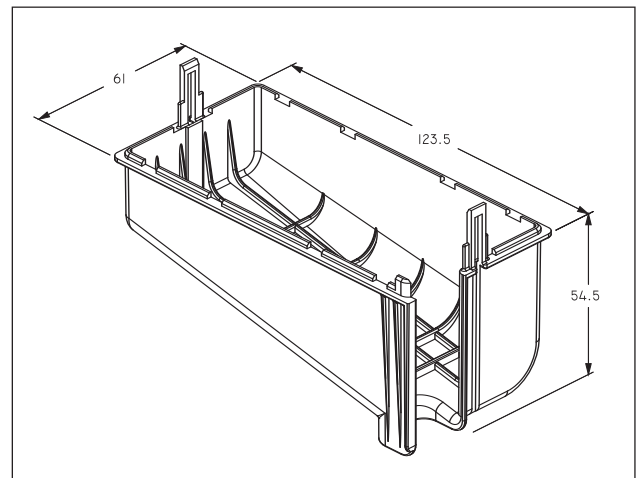

MODULAR ASSEMBLIES SECTION



Part Number: E-0786 - Modular Assembly

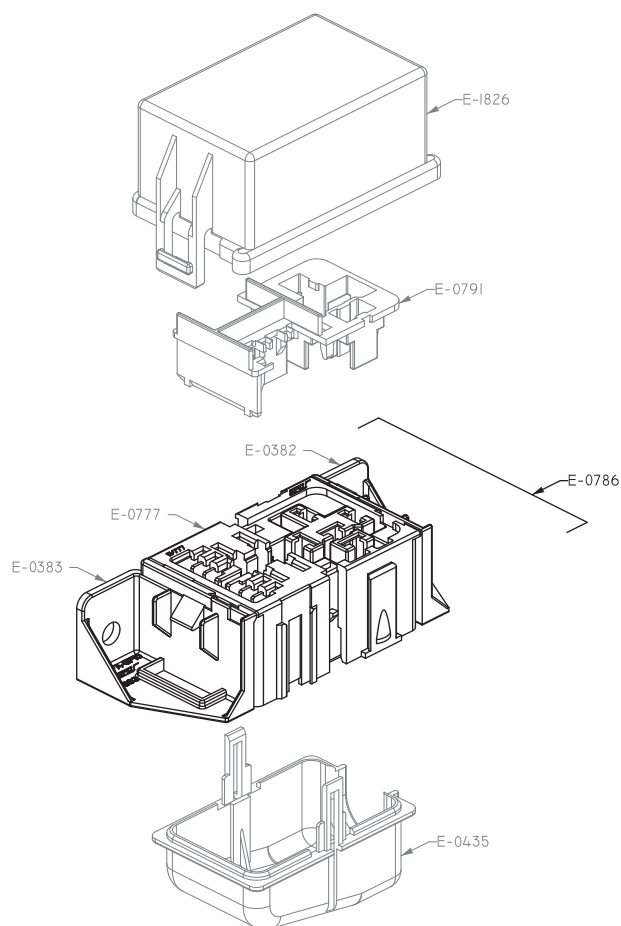

ASSOCIATED COMPONENTS IN GRAY SOLD SEPARATELY

MODULAR ASSEMBLY E-0786 (1 Module) - Purchased in Assembly

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-0777	ISO and Micro (1/2 ISO) Relay Module	8
E-0382	Right End Bracket	29
E-0383	Left End Bracket	29


REQUIRED SPACER - Sold Separately

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-0791	ISO and Micro (1/2 ISO) Relay Spacer	20

OPTIONAL PARTS

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-1826	Single Module Top Cover	51
E-0435	Single Module Bottom Cover with Drain Hole	59

Part Number: E-4675 - Modular Assembly

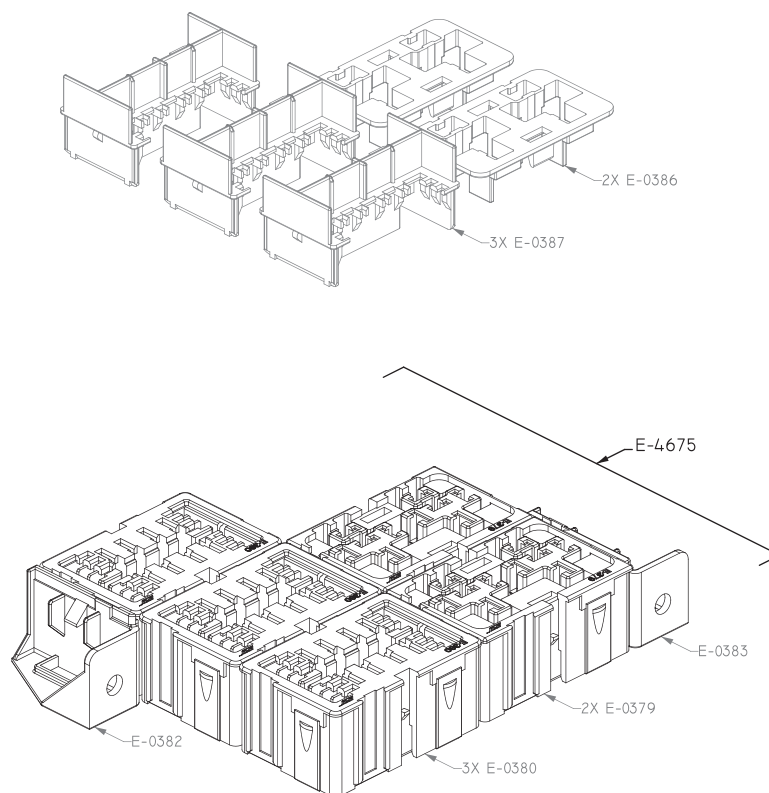

ASSOCIATED COMPONENTS IN GRAY SOLD SEPARATELY


MODULAR ASSEMBLY E-4675 (5 Module) - Purchased in Assembly

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-0380	Micro (1/2 ISO) Relay Module	6
E-0379	ISO Relay Module	6
E-0382	Right End Bracket	29
E-0383	Left End Bracket	29

REQUIRED SPACER - Sold Separately

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-0387	Micro (1/2 ISO) Relay Spacer	19
E-0386	ISO Relay Spacer	19

Part Number: E-4683 - Modular Assembly

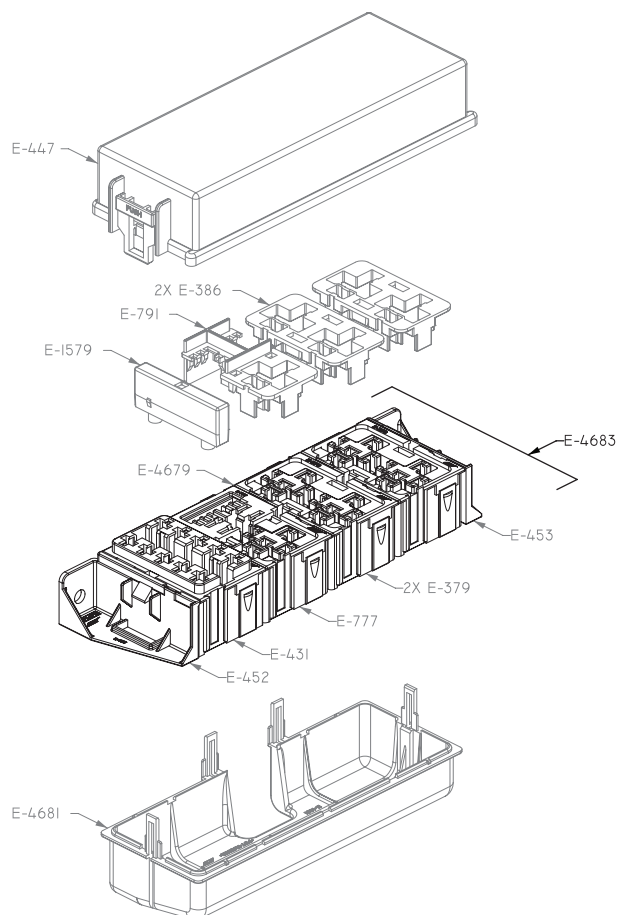

ASSOCIATED COMPONENTS IN GRAY SOLD SEPARATELY

MODULAR ASSEMBLY E-4683 (4 Module) - Purchased in Assembly

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-0379	ISO Relay Module	6
E-0777	ISO and Micro (1/2 ISO) Relay Module	8
E-0431	Maxifuse Module	7
E-4679	Bottom Cover Attachment Bracket	37
E-0452	Left Side Bracket	29
E-0453	Right Side Bracket	30


REQUIRED SPACER - Sold Separately

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-0386	ISO Relay Spacer	19
E-0791	ISO and Micro (1/2 ISO) Relay Spacer	20
E-1579	Maxifuse Spacer	22

OPTIONAL PARTS

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-0447	Four Module Top Cover	47
E-4681	Four Module Bottom Cover	61

Part Number: E-5900 - Modular Assembly

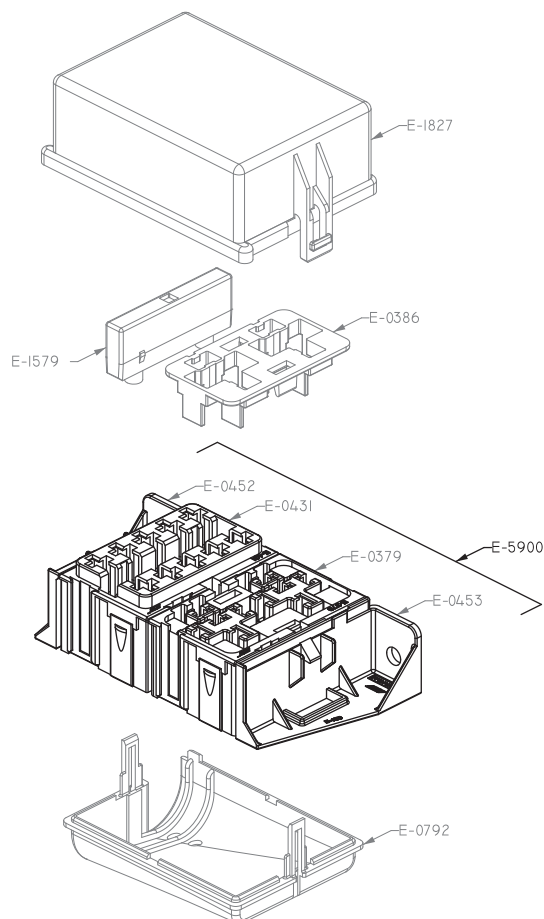

ASSOCIATED COMPONENTS IN GRAY SOLD SEPARATELY

MODULAR ASSEMBLY E-5900 (2 Module) - Purchased in Assembly

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-0379	ISO Relay Module	6
E-0431	Maxifuse Module	7
E-0452	Left Side Bracket	29
E-0453	Right Side Bracket	30


REQUIRED SPACER - Sold Separately

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-0386	ISO Relay Spacer	19
E-1579	Maxifuse Spacer	22

OPTIONAL PARTS

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-1827	Two Module Top Cover	51
E-0792	Two Module Bottom Cover	60

Part Number: E-6038 - Modular Assembly

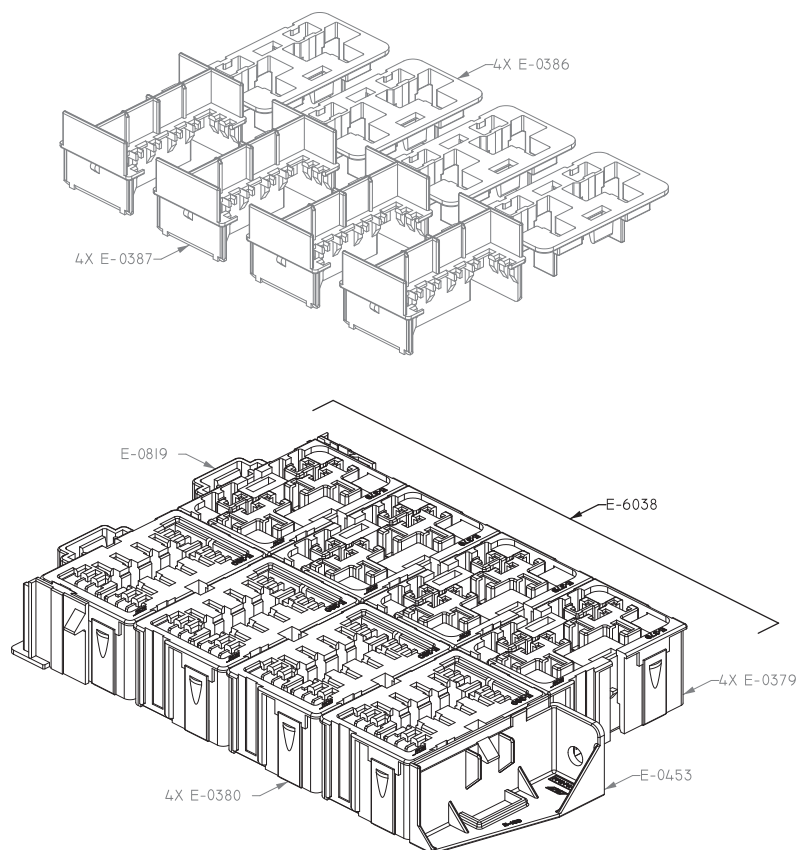

ASSOCIATED COMPONENTS IN GRAY SOLD SEPARATELY


MODULAR ASSEMBLY E-6038 (8 Module) - Purchased in Assembly

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-0379	ISO Relay Module	6
E-0380	Micro (1/2 ISO) Relay Module	6
E-0453	Right Side Bracket	30
E-0819	Two Module Snap-on Bracket	30

REQUIRED SPACER - Sold Separately

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-0386	ISO Relay Spacer	19
E-0387	Micro (1/2 ISO) Relay Spacer	19

Part Number: E-6050 - Modular Assembly

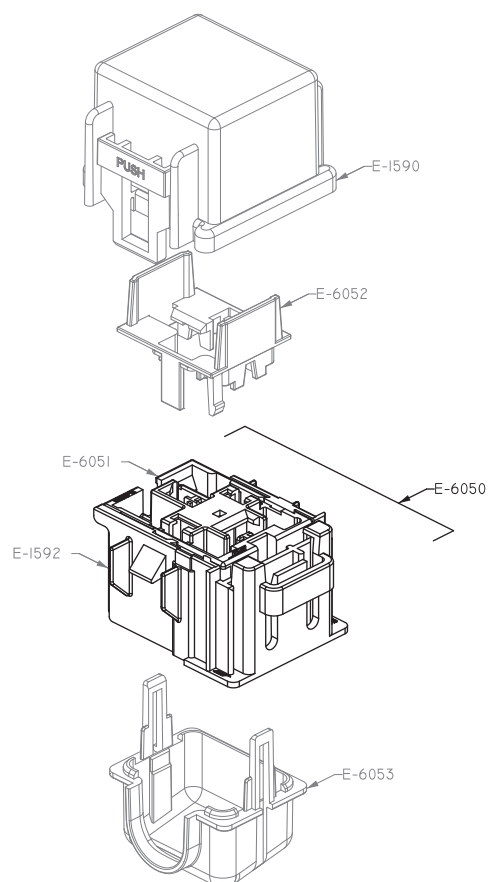

ASSOCIATED COMPONENTS IN GRAY SOLD SEPARATELY

MODULAR ASSEMBLY E-6050 (1 Module) - Purchased in Assembly

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-6051	High Current Relay Half Module	15
E-1592	Half Module Bracket	34


REQUIRED SPACER - Sold Separately

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-6052	High Current Relay Half Module Spacer	26

OPTIONAL PARTS

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-1590	Half Module Top Cover	50
E-6053	Half Module Bottom Cover	63

Part Number: E-6141 - Modular Assembly

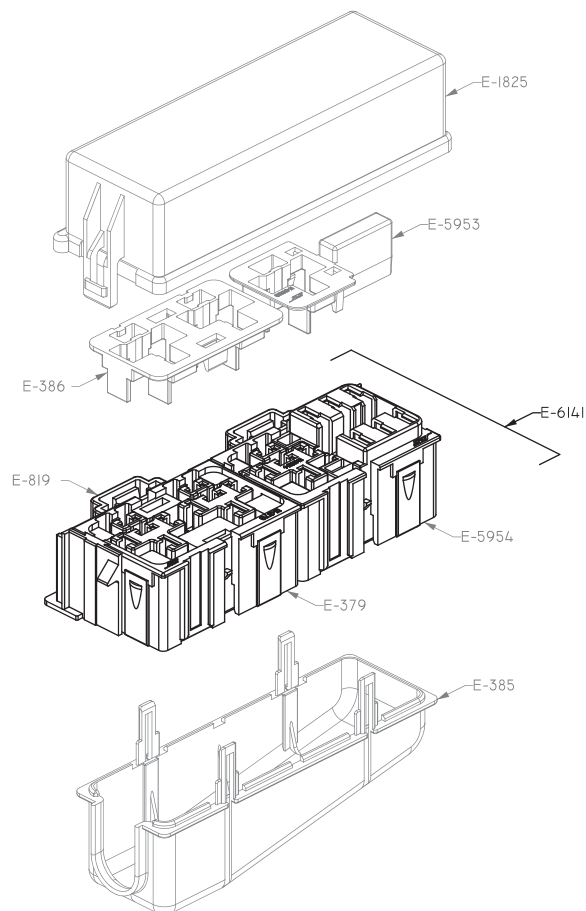

ASSOCIATED COMPONENTS IN GRAY SOLD SEPARATELY

MODULAR ASSEMBLY E-6141 (2 Module) - Purchased in Assembly

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-0379	ISO Relay Module	6
E-5954	ISO Relay and Maxifuse Module	12
E-0819	Two Module Snap-on Bracket	30


REQUIRED SPACER - Sold Separately

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-0386	ISO Relay Spacer	19
E-5953	ISO Relay and Maxifuse Spacer	25

OPTIONAL PARTS

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-1825	Two Module End-to-End Top Cover	50
E-0385	Two Module End-to-End Bottom Cover	59

Part Number: E-6150 - Modular Assembly

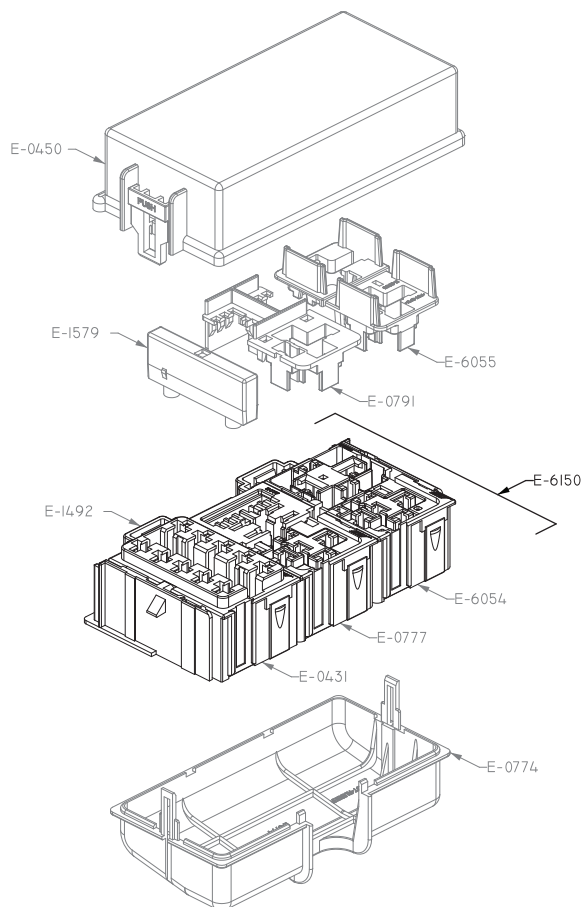

ASSOCIATED COMPONENTS IN GRAY SOLD SEPARATELY

MODULAR ASSEMBLY E-6150 (3 Module) - Purchased in Assembly

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-0431	Maxifuse Module	7
E-0777	ISO and Micro (1/2 ISO) Relay Module	8
E-6054	High Current and ISO Relay Module	16
E-1492	Three Module Snap-on Bracket	33


REQUIRED SPACER - Sold Separately

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-1579	Maxifuse Spacer	22
E-0791	ISO and Micro (1/2 ISO) Relay Spacer	20
E-6055	High Current and ISO Relay Spacer	26

OPTIONAL PARTS

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-0450	Three Module Top Cover	48
E-0774	Three Module Bottom Cover	59

Part Number: E-6254 - Modular Assembly

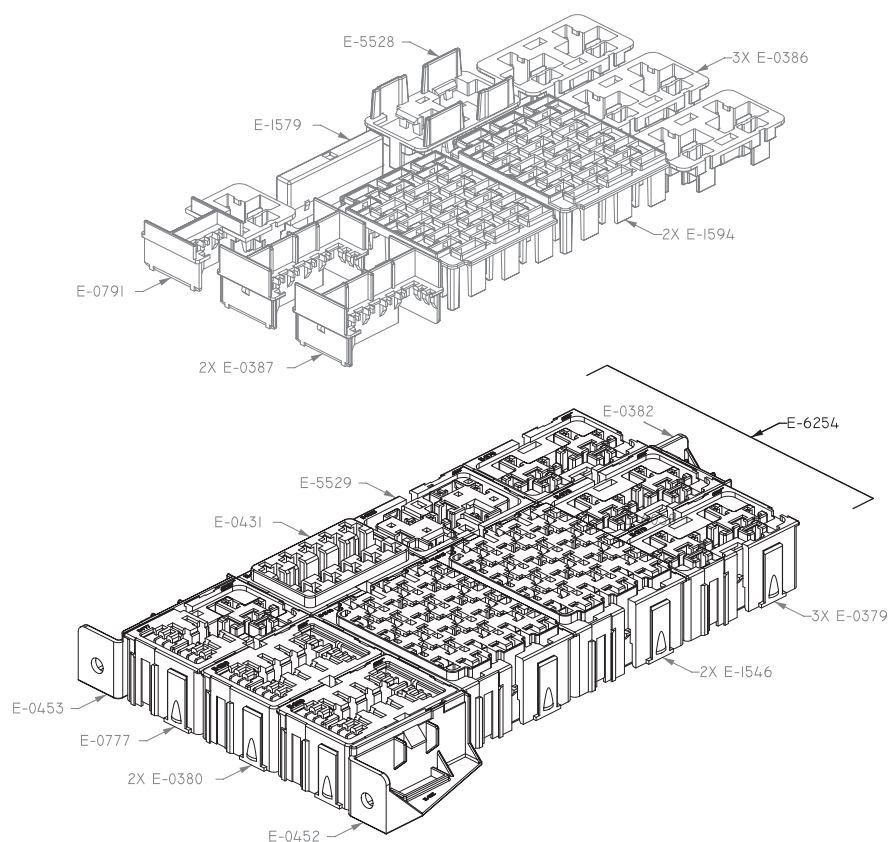

ASSOCIATED COMPONENTS IN GRAY SOLD SEPARATELY


MODULAR ASSEMBLY E-6254 (10 Module) - Purchased in Assembly

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-0379	ISO Relay Module	6
E-0380	Micro (1/2 ISO) Relay Module	6
E-0431	Maxifuse Module	7
E-0777	ISO and Micro (1/2 ISO) Relay Module	8
E-1546	27 Minifuse Double Module	10
E-5529	High Current Relay Module	12
E-0382	Right End Bracket	29
E-0452	Left Side Bracket	29
E-0453	Right Side Bracket	30

REQUIRED SPACER - Sold Separately

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-0386	ISO Relay Spacer	19
E-0387	Micro (1/2 ISO) Relay Spacer	19
E-0791	ISO and Micro (1/2 ISO) Relay Spacer	20
E-1579	Maxifuse Spacer	22
E-1594	27 Minifuse Double Module Spacer	23
E-5528	High Current Relay Spacer	24

Part Number: R-65171-001 - Modular Assembly

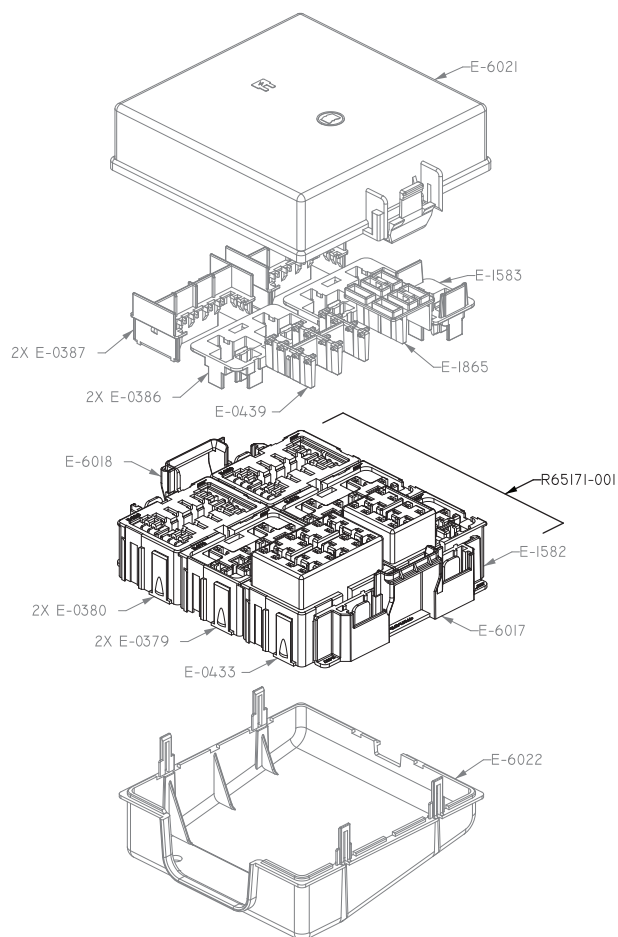

ASSOCIATED COMPONENTS IN GRAY SOLD SEPARATELY

MODULAR ASSEMBLY R-65171-001 (6 Module) - Purchased in Assembly

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-0379	ISO Relay Module	6
E-0380	Micro (1/2 ISO) Relay Module	6
E-0443	Minifuse Module	7
E-1582	ISO Relay and Minifuse Module	10
E-6017	Two Module Side Bracket	41
E-6018	Two Module Side Bracket	41


REQUIRED SPACER - Sold Separately

PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-0386	ISO Relay Spacer	19
E-0387	Micro (1/2 ISO) Relay Spacer	19
E-0439	Minifuse Spacer	19
E-1583	ISO Relay Half Module Spacer	22
E-1865	Minifuse Half Module Spacer	23

OPTIONAL PARTS


PART NUMBER	INDIVIDUAL COMPONENT	REFERENCE PAGE
E-6021-001	Top Cover	56
E-6022	Bottom Cover	63

TERMINAL SELECTION GUIDE

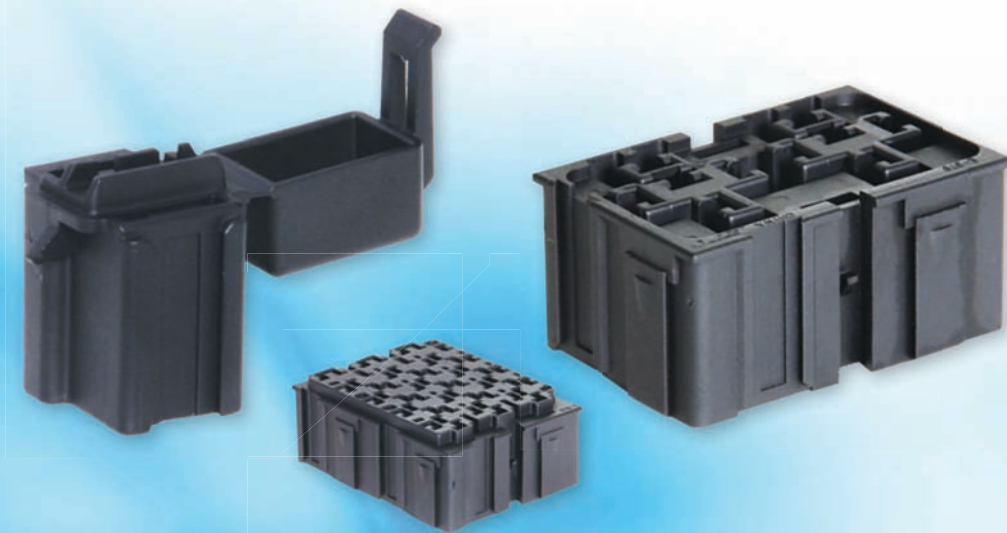


Part Number: E-0379 - ISO Relay Module

CAVITY SPECS	MANUFACTURER	DESCRIPTION	MANUFACTURER PART NUMBER
ES-E-877		Terminal Female (Full ISO Relay)	
	Lear	10-12 Gauge Wire	361030-YF200
	Lear	14-16 Gauge Wire	361430-YF200
	Lear	18-20 Gauge Wire	361830-YF200
	Lear	22-24 Gauge Wire	362230-YF200
	Lear	(2) 14-16 Gauge Wires	361130-YF200
	Lear	(2) 18-20 Gauge Wires	361330-YF200
	Lear	(2) 22-24 Gauge Wires	361730-YF200
	Molex	14 Gauge Wire	N36ML-K099F
	Molex	18 Gauge Wire	N36ML-K099F

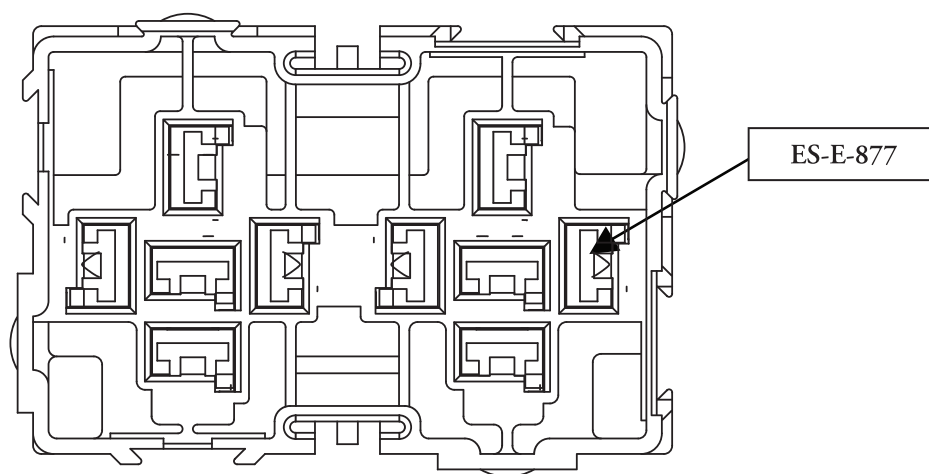


Part Number: E-0380 - Micro (1/2 ISO) Relay Module

CAVITY SPECS	MANUFACTURER	DESCRIPTION	MANUFACTURER PART NUMBER
ES-E-874-A		Terminal Female (Half-ISO Relay Small 4.8mm)	
	Molex	14-16 Gauge Wire	33113-0005
	Molex	18-20 Gauge Wire	33113-0003
	Molex	22-24 Gauge Wire	33113-0001
	Molex	(2) 18-20 Gauge Wires	33113-0006
	Molex	(2) 22-24 Gauge Wires	33113-0002
	Lear	4.8mm Double Sided Female	369921-YE200
ES-E-875-B		Terminal Female (Half-ISO Relay Large 6.3mm)	
	Molex	14-16 Gauge Wire	33112-0005
	Molex	18-20 Gauge Wire	33112-0004
	Molex	(2) 18-20 Gauge Wires	33112-0006
	Molex	(2) 22-24 Gauge Wires	33112-0003
	Lear	6.3mm Double Sided Female	369927-YD200

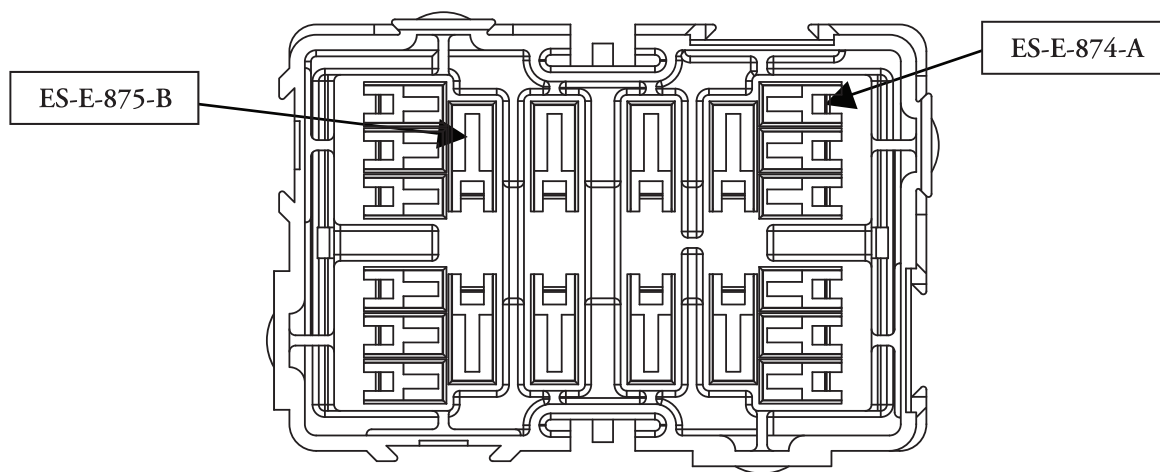


Part Number: E-0431 - Maxifuse Module

CAVITY SPECS	MANUFACTURER	DESCRIPTION	MANUFACTURER PART NUMBER
ES-E-882		Terminal Female (Maxifuse)	
	Lear	7 Gauge Wire (Tang Terminal)	360739-VR200
	Lear	10 Gauge Wire (Tang Terminal)	361039-VR200
	Lear	11 Gauge Wire (Tang Terminal)	361139-VR200
	Lear	14 Gauge Wire (Tang Terminal)	361439-VR200
	Lear	18 Gauge Wire (Tang Terminal)	361839-VR200
	Lear	Double Sided Female (Tang Terminal)	369939-TS200

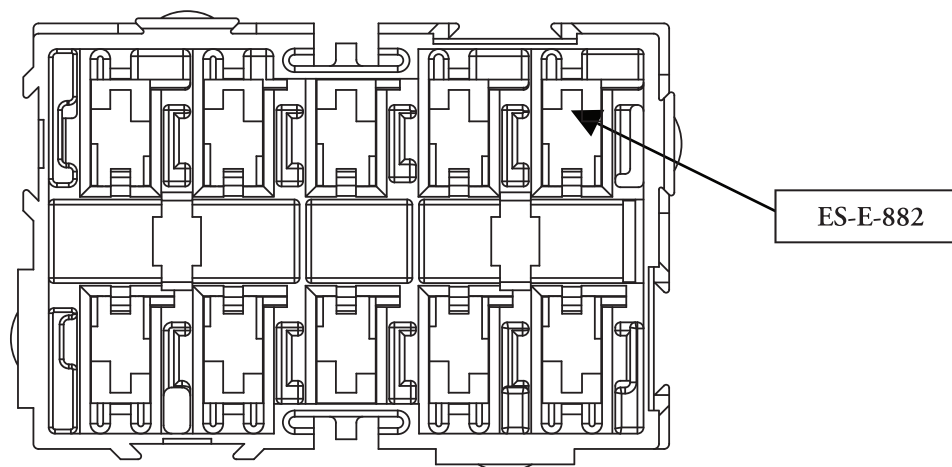


Part Number: E-0433 - Minifuse Module

CAVITY SPECS	MANUFACTURER	DESCRIPTION	MANUFACTURER PART NUMBER
ES-E-4064		Terminal Female (Minifuse)	
	Lear	10-12 Gauge Wire	771016-FK200
	Lear	14-16 Gauge Wire	771416-FK200
	Lear	18-20 Gauge Wire	771816-FK200
	Lear	22-24 Gauge Wire	772216-FK200
	Lear	(2) 14 Gauge Wires	771116-FK200
	Lear	(2) 18 Gauge Wires	771316-FK200
	PKC	Double Sided Female	E-2045-001

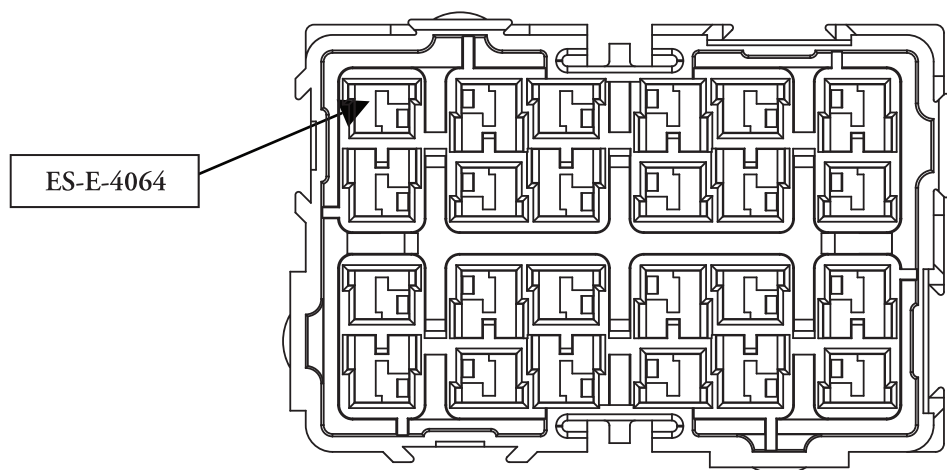


Part Number: E-0777 - ISO and Micro-ISO Relay Module

CAVITY SPECS	MANUFACTURER	DESCRIPTION	MANUFACTURER PART NUMBER
ES-E-877		Terminal Female (Full ISO Relay)	
	Lear	10-12 Gauge Wire	361030-YF200
	Lear	14-16 Gauge Wire	361430-YF200
	Lear	18-20 Gauge Wire	361830-YF200
	Lear	22-24 Gauge Wire	362230-YF200
	Lear	(2) 14-16 Gauge Wires	361130-YF200
	Lear	(2) 18-20 Gauge Wires	361330-YF200
	Lear	(2) 22-24 Gauge Wires	361730-YF200
	Molex	14 Gauge Wire	N36ML-K099F
	Molex	18 Gauge Wire	N36ML-K099F
ES-E-874-A		Terminal Female (Half-ISO Relay Small 4.8mm)	
	Molex	14-16 Gauge Wire	33113-0005
	Molex	18-20 Gauge Wire	33113-0003
	Molex	22-24 Gauge Wire	33113-0001
	Molex	(2) 18-20 Gauge Wires	33113-0006
	Molex	(2) 22-24 Gauge Wires	33113-0002
	Lear	4.8mm Double Sided Female	369921-YE200
ES-E-875-B		Terminal Female (Half-ISO Relay Large 6.3mm)	
	Molex	14-16 Gauge Wire	33112-0005
	Molex	18-20 Gauge Wire	33112-0004
	Molex	(2) 18-20 Gauge Wires	33112-0006
	Molex	(2) 22-24 Gauge Wires	33112-0003
	Lear	6.3mm Double Sided Female	369927-YD200

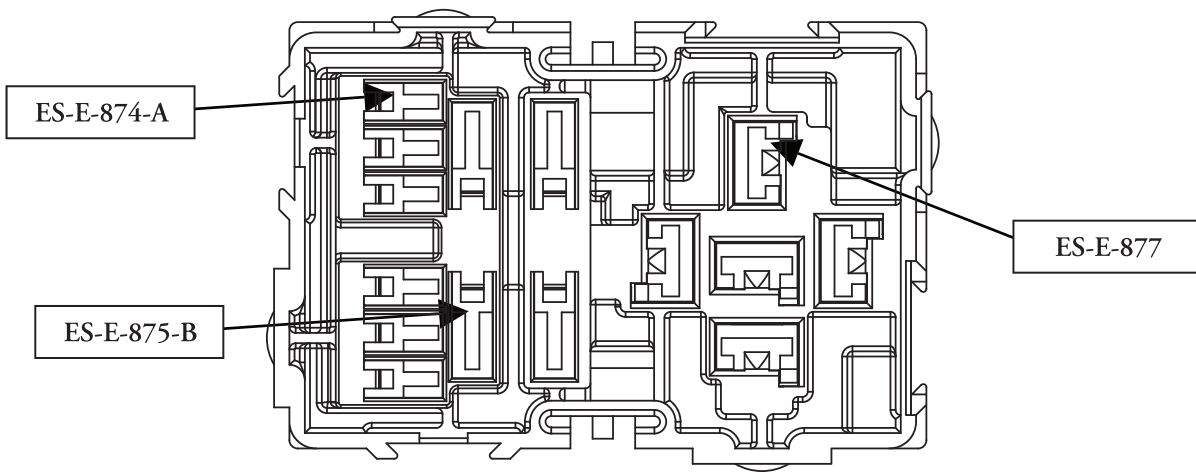


Part Number: E-0946 - ISO Relay and Diode Module

CAVITY SPECS	MANUFACTURER	DESCRIPTION	MANUFACTURER PART NUMBER
ES-E-877		Terminal Female (Full ISO Relay)	
	Lear	10-12 Gauge Wire	361030-YF200
	Lear	14-16 Gauge Wire	361430-YF200
	Lear	18-20 Gauge Wire	361830-YF200
	Lear	22-24 Gauge Wire	362230-YF200
	Lear	(2) 14-16 Gauge Wires	361130-YF200
	Lear	(2) 18-20 Gauge Wires	361330-YF200
	Lear	(2) 22-24 Gauge Wires	361730-YF200
	Molex	14 Gauge Wire	N36ML-K099F
	Molex	18 Gauge Wire	N36ML-K099F
ES-E-881		Terminal Female (Diode, Auto, and Standard Fuse)	
	Lear	10-12 Gauge Wire	361030-ZD200
	Lear	14-16 Gauge Wire	361430-ZD200
	Lear	18-20 Gauge Wire	361830-ZD200
	Lear	22-24 Gauge Wire	362230-ZD200
	Lear	(2) 14 Gauge Wires	361130-ZD200
	Lear	(2) 20 Gauge Wires	361330-ZD200
	Lear	Double Sided Female	369930-ZC200

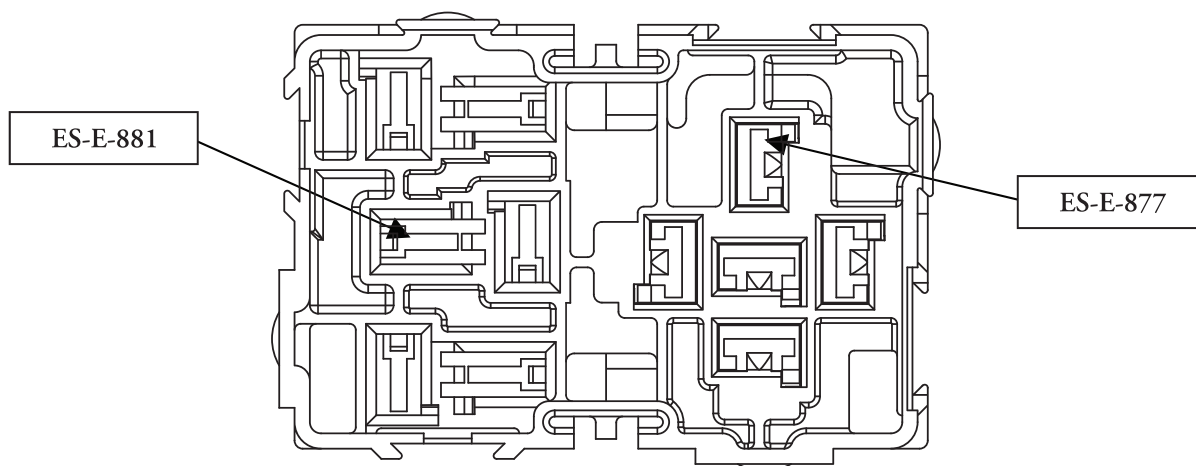


Part Number: E-1012 - Minifuse Half Module

CAVITY SPECS	MANUFACTURER	DESCRIPTION	MANUFACTURER PART NUMBER
ES-E-4064		Terminal Female (Minifuse)	
	LEAR	10-12 Wire	771016-FK200
	LEAR	14-16 Wire	771416-FK200
	LEAR	18-20 Wire	771816-FK200
	LEAR	22-24 Wire	772216-GK200
	LEAR	(2) 14 Wire	771116-FK200
	LEAR	(2) 18 Wire	771316-FK200

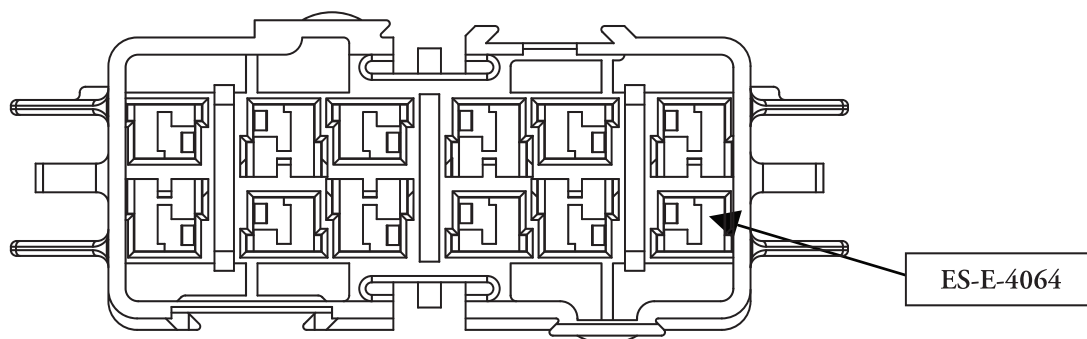


Part Number: E-1324 - High Current and ISO Relay Module

CAVITY SPECS	MANUFACTURER	DESCRIPTION	MANUFACTURER PART NUMBER
ES-E-4064		Terminal Female (Minifuse)	
	Lear	10-12 Gauge Wire	771016-FK200
	Lear	14-16 Gauge Wire	771416-FK200
	Lear	18-20 Gauge Wire	771816-FK200
	Lear	22-24 Gauge Wire	772216-FK200
	Lear	(2) 14 Gauge Wires	771116-FK200
	Lear	(2) 18 Gauge Wires	771316-FK200
ES-E-877		Terminal Female (Full ISO Relay)	
	Lear	10-12 Gauge Wire	361030-YF200
	Lear	14-16 Gauge Wire	361430-YF200
	Lear	18-20 Gauge Wire	361830-YF200
	Lear	22-24 Gauge Wire	362230-YF200
	Lear	(2) 14-16 Gauge Wires	361130-YF200
	Lear	(2) 18-20 Gauge Wires	361330-YF200
	Lear	(2) 22-24 Gauge Wires	361730-YF200
	Molex	14 Gauge Wire	N36ML-K099F
	Molex	18 Gauge Wire	N36ML-K099F
ES-E-1441		Terminal Female (High Current Relay)	
	Yazaki	8-10 Gauge Wire	7116-3250
	Yazaki	12 Gauge Wire	7116-3251

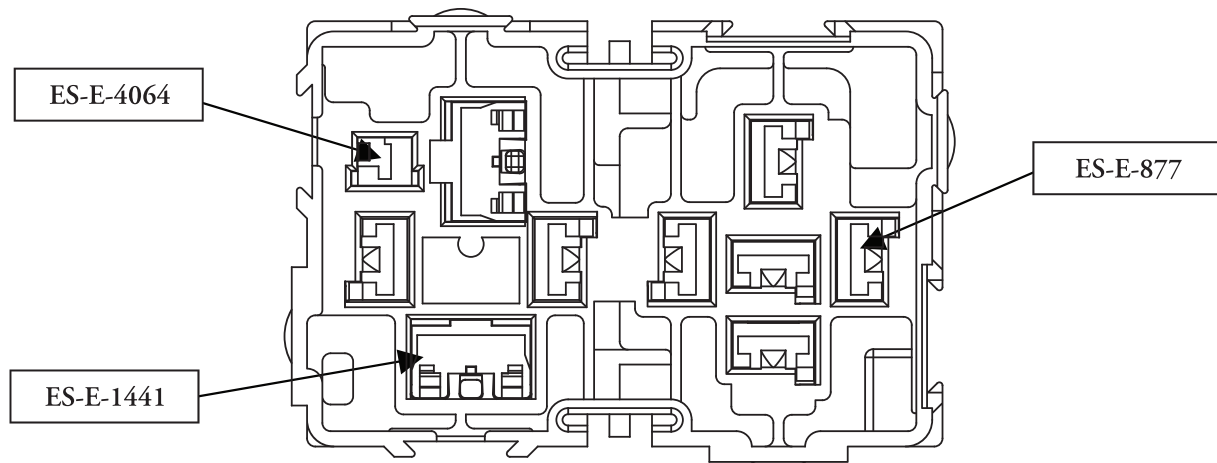


Part Number: E-1546 - 27 Minifuse Double Module

CAVITY SPECS	MANUFACTURER	DESCRIPTION	MANUFACTURER PART NUMBER
ES-E-4064		Terminal Female (Minifuse)	
	Lear	10-12 Gauge Wire	771016-FK200
	Lear	14-16 Gauge Wire	771416-FK200
	Lear	18-20 Gauge Wire	771816-FK200
	Lear	22-24 Gauge Wire	772216-FK200
	Lear	(2) 14 Gauge Wires	771116-FK200
	Lear	(2) 18 Gauge Wires	771316-FK200
ES-E-4064-A		Terminal Female (Minifuse Bussed)	
	Lear	10-12 Gauge Wire, 1-Way Buss	781201-FJ200
	Lear	14-16 Gauge Wire, 1-Way Buss	781401-FJ200
	Lear	10-12 Gauge Wire, 2-Way Buss	781202-FJ200
	Lear	10-12 Gauge Wire, 3-Way Buss	781203-FJ200
	Lear	10-12 Gauge Wire, 4-Way Buss	781204-FJ200
	Lear	10-12 Gauge Wire, 5-Way Buss	781205-FJ200
	Lear	14-16 Gauge Wire, 2-Way Buss	781402-FJ200
	Lear	14-16 Gauge Wire, 3-Way Buss	781403-FJ200
	Lear	18-20 Gauge Wire, 2-Way Buss	781802-FJ200

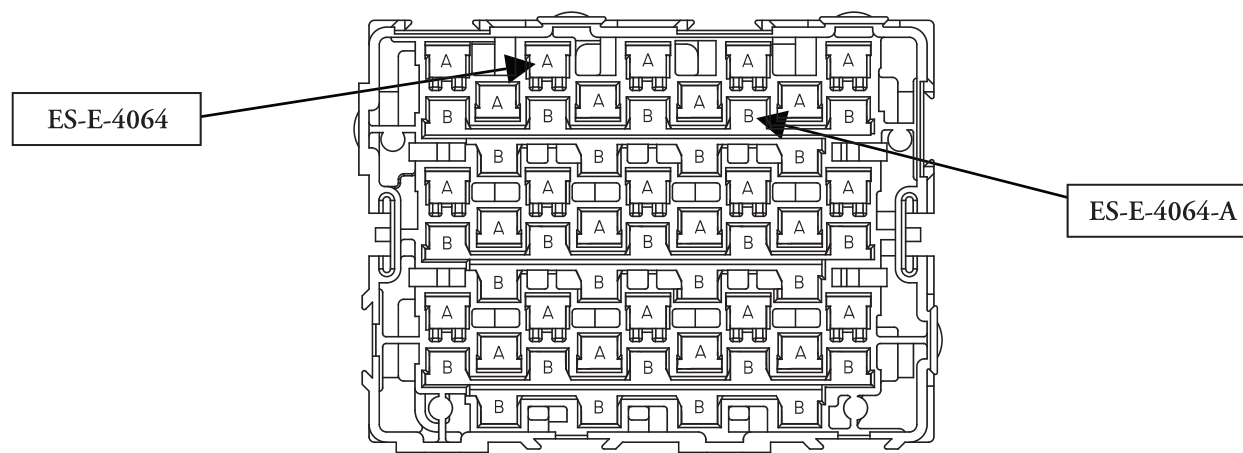


Part Number: E-1582 - ISO Relay and Minifuse Module

CAVITY SPECS	MANUFACTURER	DESCRIPTION	MANUFACTURER PART NUMBER
ES-E-877		Terminal Female (Full ISO Relay)	
	Lear	10-12 Gauge Wire	361030-YF200
	Lear	14-16 Gauge Wire	361430-YF200
	Lear	18-20 Gauge Wire	361830-YF200
	Lear	22-24 Gauge Wire	362230-YF200
	Lear	(2) 14-16 Gauge Wires	361130-YF200
	Lear	(2) 18-20 Gauge Wires	361330-YF200
	Lear	(2) 22-24 Gauge Wires	361730-YF200
	Molex	14 Gauge Wire	N36ML-K099F
	Molex	18 Gauge Wire	N36ML-K099F
ES-E-4064		Terminal Female (Minifuse)	
	Lear	10-12 Gauge Wire	771016-FK200
	Lear	14-16 Gauge Wire	771416-FK200
	Lear	18-20 Gauge Wire	771816-FK200
	Lear	22-24 Gauge Wire	772216-FK200
	Lear	(2) 14 Gauge Wires	771116-FK200
	Lear	(2) 18 Gauge Wires	771316-FK200
	PKC	Double Sided Female	E-2045-001

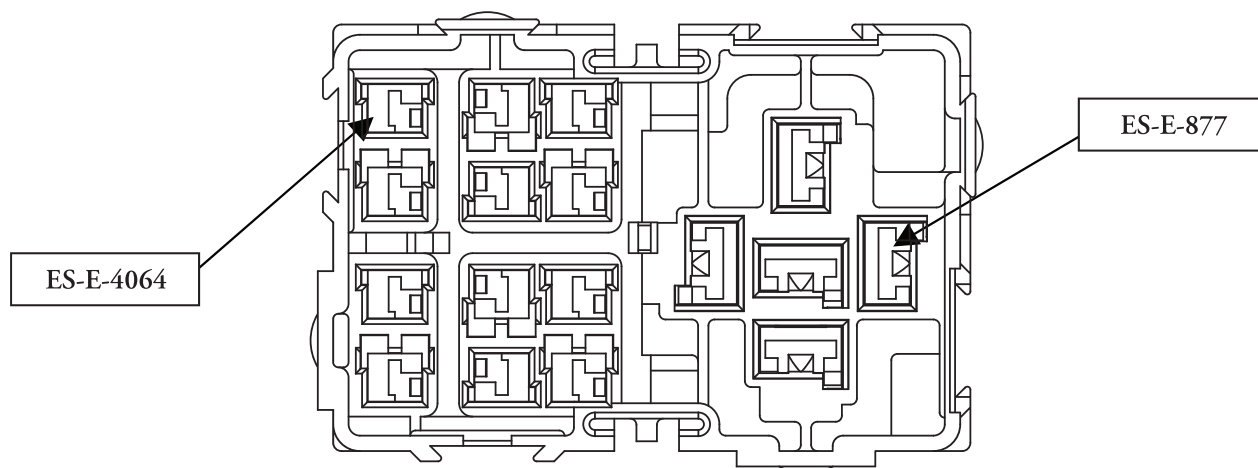


Part Number: E-1588 - Micro (1/2 ISO) Relay Half Module

CAVITY SPECS	MANUFACTURER	DESCRIPTION	MANUFACTURER PART NUMBER
ES-E-874-A		Terminal Female (Half-ISO Relay Small 4.8mm)	
	Molex	14-16 Gauge Wire	33113-0005
	Molex	18-20 Gauge Wire	33113-0003
	Molex	22-24 Gauge Wire	33113-0001
	Molex	(2) 18-20 Gauge Wires	33113-0006
	Molex	(2) 22-24 Gauge Wires	33113-0002
	Lear	4.8mm Double Sided Female	369921-YE200
ES-E-875-B		Terminal Female (Half-ISO Relay Large 6.3mm)	
	Molex	14-16 Gauge Wire	33112-0005
	Molex	18-20 Gauge Wire	33112-0004
	Molex	(2) 18-20 Gauge Wires	33112-0006
	Molex	(2) 22-24 Gauge Wires	33112-0003
	Lear	6.3mm Double Sided Female	369927-YD200

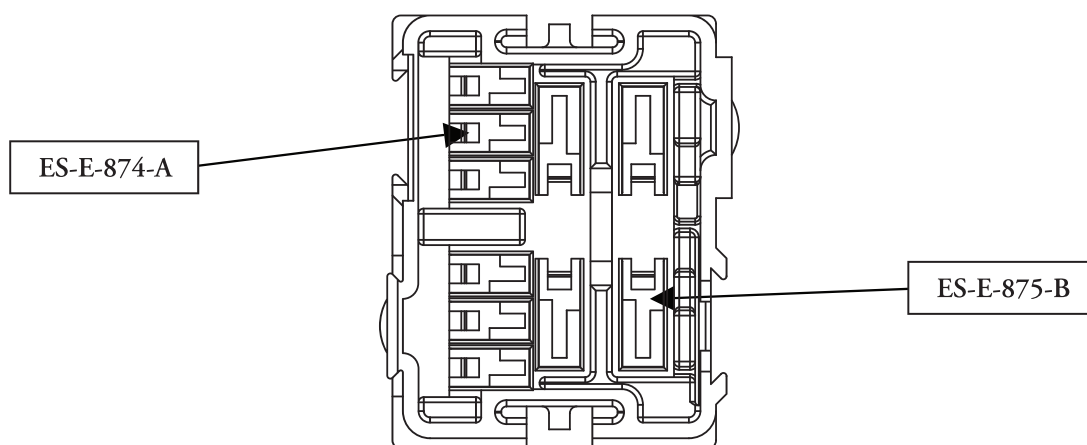


Part Number: E-4321 - Single J-Case Module

CAVITY SPECS	MANUFACTURER	DESCRIPTION	MANUFACTURER PART NUMBER
ES-E-4325		Terminal Male (J-Type Cartridge Fuse)	
	Lear	10 Gauge Wire	381025-JL48
	Lear	11 Gauge Wire	381125-JL48
	Lear	14 Gauge Wire	381425-JL48

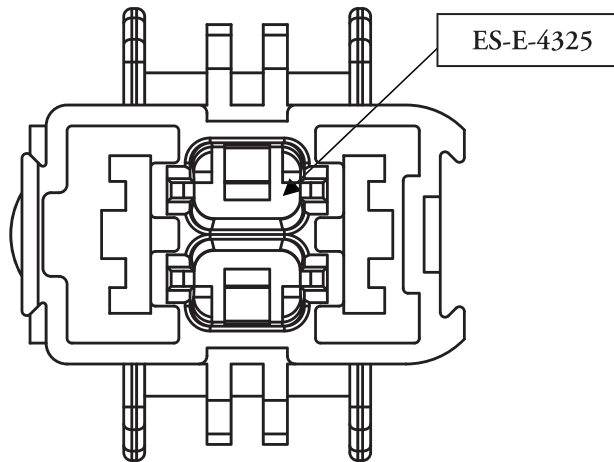


Part Number: E-5529 - High Current Relay Module

CAVITY SPECS	MANUFACTURER	DESCRIPTION	MANUFACTURER PART NUMBER
ES-E-877		Terminal Female (Full ISO Relay)	
	Lear	10-12 Gauge Wire	361030-YF200
	Lear	14-16 Gauge Wire	361430-YF200
	Lear	18-20 Gauge Wire	361830-YF200
	Lear	22-24 Gauge Wire	362230-YF200
	Lear	(2) 14-16 Gauge Wires	361130-YF200
	Lear	(2) 18-20 Gauge Wires	361330-YF200
	Lear	(2) 22-24 Gauge Wires	361730-YF200
	Molex	14 Gauge Wire	N36ML-K099F
	Molex	18 Gauge Wire	N36ML-K099F
ES-E-1441		Terminal Female (High Current Relay)	
	Yazaki	8-10 Gauge Wire	7116-3250
	Yazaki	12 Gauge Wire	7116-3251

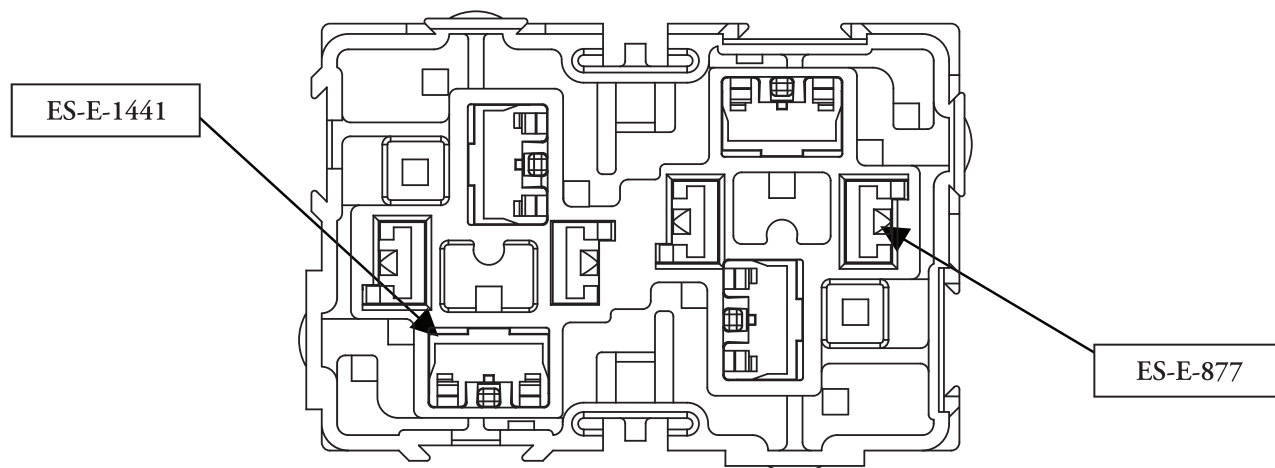


Part Number: E-5954 - ISO Relay and Maxifuse Module

CAVITY SPECS	MANUFACTURER	DESCRIPTION	MANUFACTURER PART NUMBER
ES-E-877		Terminal Female (Full ISO Relay)	
	Lear	10-12 Gauge Wire	361030-YF200
	Lear	14-16 Gauge Wire	361430-YF200
	Lear	18-20 Gauge Wire	361830-YF200
	Lear	22-24 Gauge Wire	362230-YF200
	Lear	(2) 14-16 Gauge Wires	361130-YF200
	Lear	(2) 18-20 Gauge Wires	361330-YF200
	Lear	(2) 22-24 Gauge Wires	361730-YF200
	Molex	14 Gauge Wire	N36ML-K099F
	Molex	18 Gauge Wire	N36ML-K099F
ES-E-882		Terminal Female (Maxifuse)	
	Lear	7 Gauge Wire (Tang Terminal)	360739-VR200
	Lear	10 Gauge Wire (Tang Terminal)	361039-VR200
	Lear	11 Gauge Wire (Tang Terminal)	361139-VR200
	Lear	14 Gauge Wire (Tang Terminal)	361439-VR200
	Lear	18 Gauge Wire (Tang Terminal)	361839-VR200
	Lear	Double Sided Female (Tang Terminal)	369939-TS200

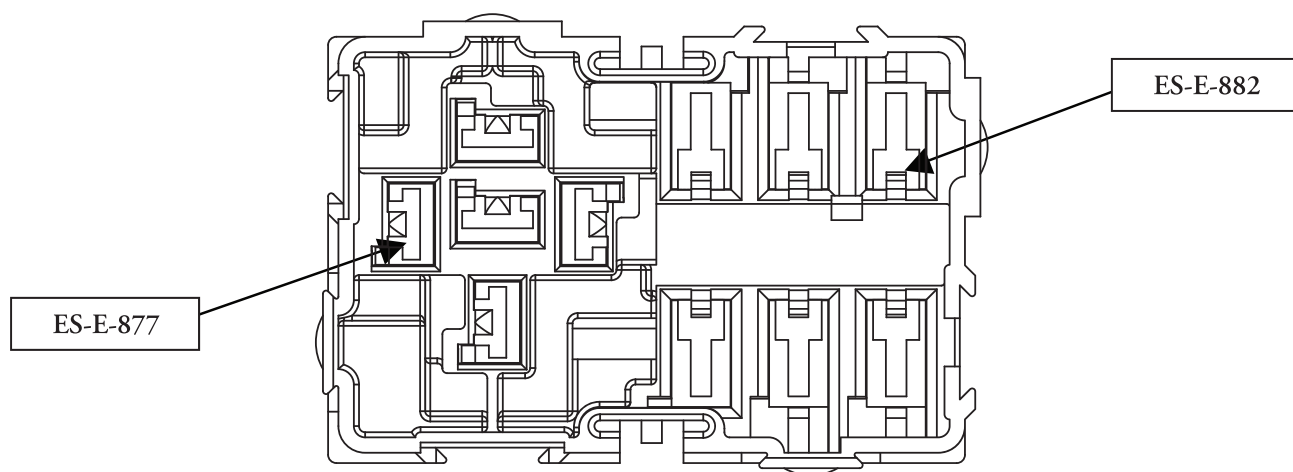


Part Number: E-5968 - Micro (1/2 ISO) Relay and Maxifuse Module

CAVITY SPECS	MANUFACTURER	DESCRIPTION	MANUFACTURER PART NUMBER
ES-E-882		Terminal Female (Maxifuse)	
	Lear	7 Gauge Wire (Tang Terminal)	360739-VR200
	Lear	10 Gauge Wire (Tang Terminal)	361039-VR200
	Lear	11 Gauge Wire (Tang Terminal)	361139-VR200
	Lear	14 Gauge Wire (Tang Terminal)	361439-VR200
	Lear	18 Gauge Wire (Tang Terminal)	361839-VR200
	Lear	Double Sided Female (Tang Terminal)	369939-TS200
ES-E-874-A		Terminal Female Micro (1/2 ISO) Relay Small 4.8mm	
	Molex	14-16 Gauge Wire	33113-0005
	Molex	18-20 Gauge Wire	33113-0003
	Molex	22-24 Gauge Wire	33113-0001
	Molex	(2) 18-20 Gauge Wires	33113-0006
	Molex	(2) 22-24 Gauge Wires	33113-0002
	Lear	4.8mm Double Sided Female	369921-YE200
ES-E-875-B		Terminal Female Micro (1/2 ISO) Relay Large 6.3mm	
	Molex	14-16 Gauge Wire	33112-0005
	Molex	18-20 Gauge Wire	33112-0004
	Molex	(2) 18-20 Gauge Wires	33112-0006
	Molex	(2) 22-24 Gauge Wires	33112-0003
	Lear	6.3mm Double Sided Female	369927-YD200

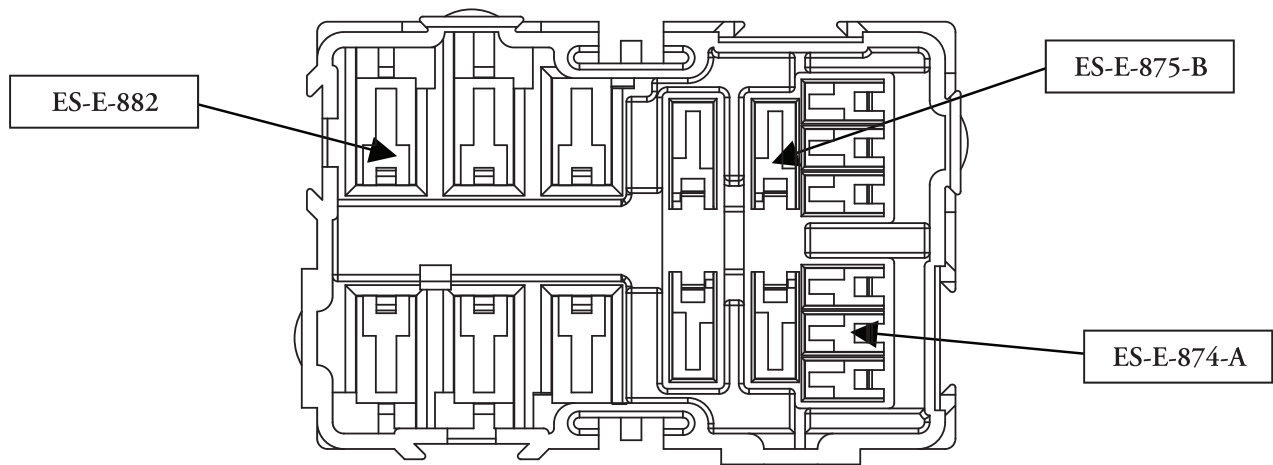


Part Number: E-5972-001 / 002 - Single Minifuse Module

CAVITY SPECS	MANUFACTURER	DESCRIPTION	MANUFACTURER PART NUMBER
ES-E-4064		Terminal Female (Minifuse)	
	Lear	10-12 Gauge Wire	771016-FK200
	Lear	14-16 Gauge Wire	771416-FK200
	Lear	18-20 Gauge Wire	771816-FK200
	Lear	22-24 Gauge Wire	772216-FK200
	Lear	(2) 14 Gauge Wires	771116-FK200
	Lear	(2) 18 Gauge Wires	771316-FK200

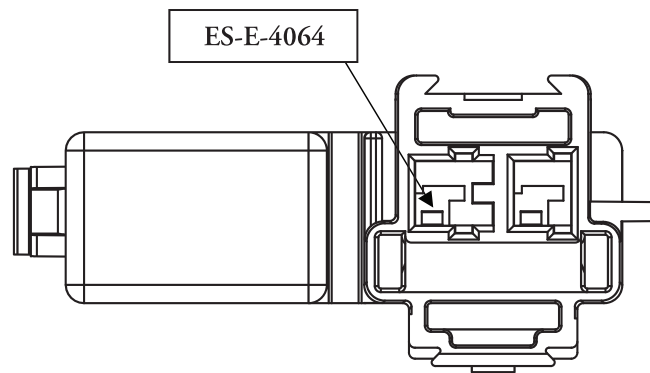


Part Number: E-6015 - J-Case Module

CAVITY SPECS	MANUFACTURER	DESCRIPTION	MANUFACTURER PART NUMBER
ES-E-4325		Terminal Male (J-Type Cartridge Fuse)	
	Lear	10 Gauge Wire	381025-JL48
	Lear	11 Gauge Wire	381125-JL48
	Lear	14 Gauge Wire	381425-JL48

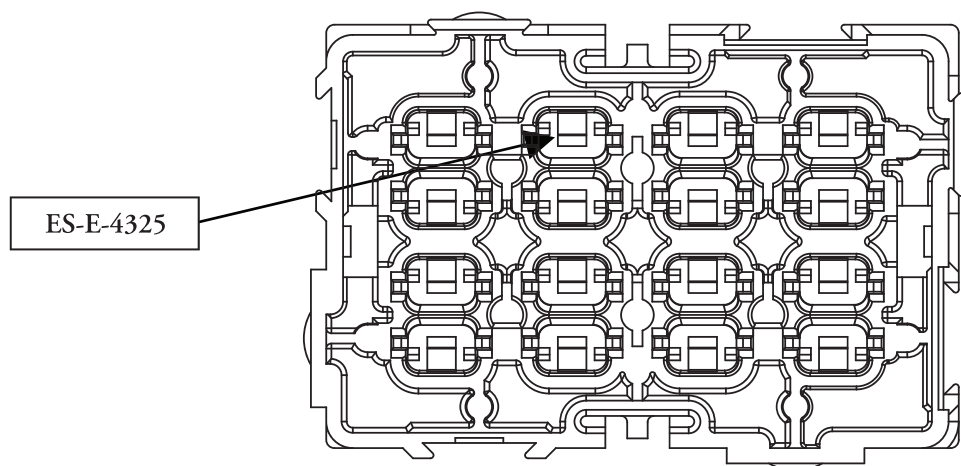


Part Number: E-6051 - High Current Relay Half Module

CAVITY SPECS	MANUFACTURER	DESCRIPTION	MANUFACTURER PART NUMBER
ES-E-877		Terminal Female (Full ISO Relay)	
	Lear	10-12 Gauge Wire	361030-YF200
	Lear	14-16 Gauge Wire	361430-YF200
	Lear	18-20 Gauge Wire	361830-YF200
	Lear	22-24 Gauge Wire	362230-YF200
	Lear	(2) 14-16 Gauge Wires	361130-YF200
	Lear	(2) 18-20 Gauge Wires	361330-YF200
	Lear	(2) 22-24 Gauge Wires	361730-YF200
	Molex	14 Gauge Wire	36ML-K099F
	Molex	18 Gauge Wire	N36ML-K099F
ES-E-1441		Terminal Female (High Current Relay)	
	Yazaki	8-10 Gauge Wire	7116-3250
	Yazaki	12 Gauge Wire	7116-3251

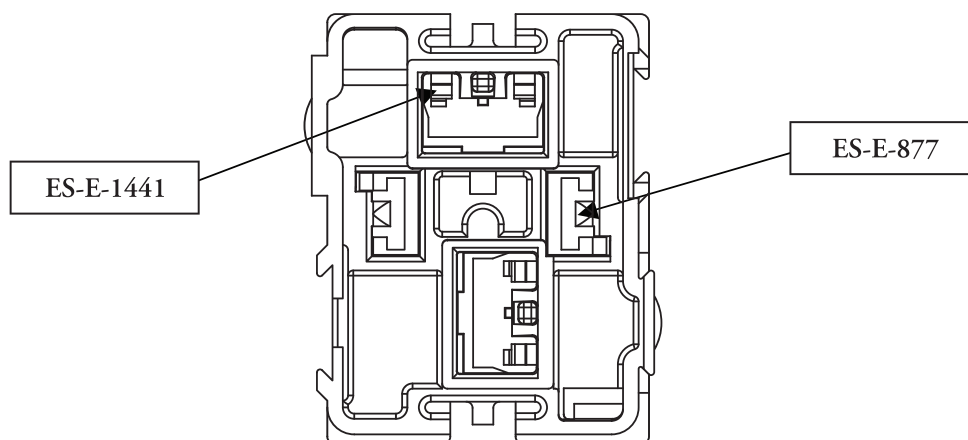


Part Number: E-6054 - High Current and ISO Relay Module

CAVITY SPECS	MANUFACTURER	DESCRIPTION	MANUFACTURER PART NUMBER
ES-E-877		Terminal Female (Full ISO Relay)	
	Lear	10-12 Gauge Wire	361030-YF200
	Lear	14-16 Gauge Wire	361430-YF200
	Lear	18-20 Gauge Wire	361830-YF200
	Lear	22-24 Gauge Wire	362230-YF200
	Lear	(2) 14-16 Gauge Wires	361130-YF200
	Lear	(2) 18-20 Gauge Wires	361330-YF200
	Lear	(2) 22-24 Gauge Wires	361730-YF200
	Molex	14 Gauge Wire	N36ML-K099F
	Molex	18 Gauge Wire	N36ML-K099F
ES-E-1441		Terminal Female (High Current Relay)	
	Yazaki	8-10 Gauge Wire	7116-3250
	Yazaki	12 Gauge Wire	7116-3251

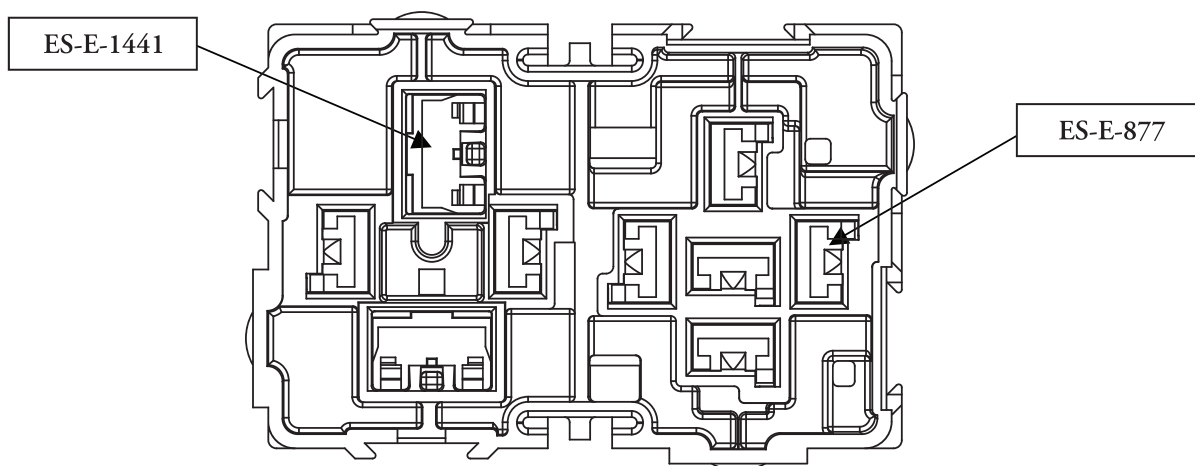


Part Number: E-6151 - Micro 280 Relay Module

CAVITY SPECS	MANUFACTURER	DESCRIPTION	MANUFACTURER PART NUMBER
ES-E-3614-A-001		Female Terminal (2.8mm)	
	Yazaki	10-12 Gauge Wire	7116-4113-02
	Yazaki	14-16 Gauge Wire	7116-4112-02
	Yazaki	18 Gauge Wire	7116-4111-02
	Yazaki	20-22 Gauge Wire	7116-4110-02

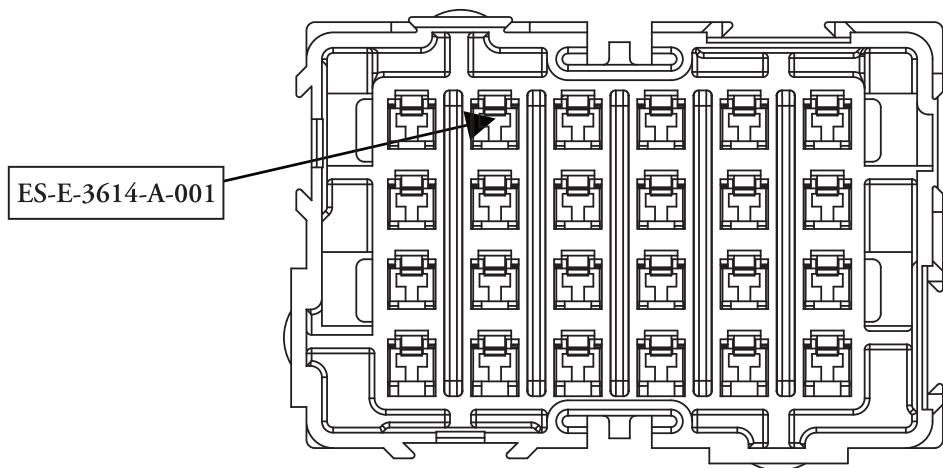

Part Number: R-65264-001 - ISO Relay and Minifuse Type Double Module

CAVITY SPECS	MANUFACTURER	DESCRIPTION	MANUFACTURER PART NUMBER
ES-E-4064		Terminal Female (Minifuse)	
	Lear	10-12 Gauge Wire	771016-FK200
	Lear	14-16 Gauge Wire	771416-FK200
	Lear	18-20 Gauge Wire	771816-FK200
	Lear	22-24 Gauge Wire	772216-FK200
	Lear	(2) 14 Gauge Wires	771116-FK200
	Lear	(2) 18 Gauge Wires	771316-FK200
ES-E-4064-A		Terminal Female (Minifuse Bussed)	
	Lear	10-12 Gauge Wire, 1-Way Buss	781201-FJ200
	Lear	14-16 Gauge Wire, 1-Way Buss	781401-FJ200
	Lear	10-12 Gauge Wire, 2-Way Buss	781202-FJ200
	Lear	10-12 Gauge Wire, 3-Way Buss	781203-FJ200
	Lear	10-12 Gauge Wire, 4-Way Buss	781204-FJ200
	Lear	14-16 Gauge Wire, 2-Way Buss	781402-FJ200
	Lear	14-16 Gauge Wire, 3-Way Buss	781403-FJ200
	Lear	18-20 Gauge Wire, 2-Way Buss	781802-FJ200
ES-E-877		Terminal Female (Full ISO Relay)	
	Lear	10-12 Gauge Wire	361030-YF200
	Lear	14-16 Gauge Wire	361430-YF200
	Lear	18-20 Gauge Wire	361830-YF200
	Lear	22-24 Gauge Wire	362230-YF200
	Lear	(2) 14-16 Gauge Wires	361130-YF200
	Lear	(2) 18-20 Gauge Wires	361330-YF200
	Lear	(2) 22-24 Gauge Wires	361730-YF200
	Molex	14 Gauge Wire	N36ML-K099F
	Molex	18 Gauge Wire	N36ML-K099F

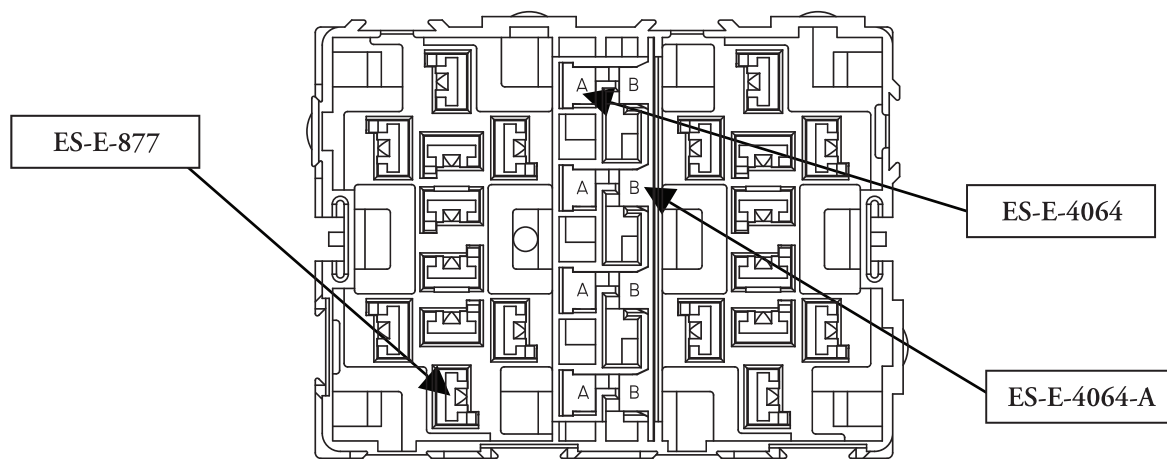

PKC GROUP



North America

36555 Corporate Drive
Suite 300
Farmington Hills, MI 48331
USA
Tel. +1 248 489 4700
sales@pkcgroup.com

South America

Rua Estrada da Graciosa
803 - Atuba
82840 - 360 - Curitiba
Brazil
Tel. + 55 41 2109 9778
sales@pkcgroup.com

Europe

Vihikari 10
FI-90440 Kempele
Finland
Tel. +358 20 1752 111
sales@pkcgroup.com

Asia

Building 13CD
Suchun Industrial Square
428 Xinglong Street
Suzhou Industrial Park,
215024
China
Tel. +86 512 6265 2025
sales@pkcgroup.com

www.pkcgroup.com